

Ed Bryant | Unilock Founder November 30, 1935 - January 28, 2021









Laying a Foundation for Inspiration

50 years ago, our founder had a dream. When Ed Bryant introduced the UNI-Stone paver to the North American market, he essentially established the hardscaping industry here. Since then, we have continued to innovate and grow. As a result, we are proud to have played a part in creating countless beautiful spaces, from backyard patios to landmark destinations across the continent. And we're just getting started. We know Ed would be proud.







Quality

FOR US, IT'S PERSONAL

Over 50 years ago, our founder stumbled upon a unique little European product called the UNI-Stone. Intrigued by the benefits of this revolutionary paving method, he decided to license the product and bring the concept to North America. He purchased a basic paver machine from Europe and hired a small staff to produce the stones.

In those early days, most sales of Unilock were to large-scale commercial properties and streetscapes. Any lapse in quality would be costly and would jeopardize our owner's personal reputation, so quality was of paramount importance.

From these humble beginnings, through to the multinational company we are today, Unilock has remained a family-owned company that puts quality first. For us, it's not just a matter of dollars and cents, it's our personal reputation that's on the line.

Homeowners, Contractors, Landscape Designers and Architects across North America know they can rely on us to supply them with top quality product every time.





See page 120 for more information.

TABLE OF CONTENTS

PAVERS

22 Ada Paver 23 Anchorlock™ 24 Arcana™ Artline™Smooth .25 Artline[™] Umbriano[®] .26 Artline™ II Campo® .27 Beacon Hill™ Flagstone 28 .32 Beacon Hill™ Smooth Bristol Valley® .34 Brussels Block® 38 Copthorne® .39 Courtstone® .40 Eco-Line® 41 Eco-Priora[™] 43 Eco-Promenade® 44 Hex Paver[™]..... .45 Hollandstone™. .46 Holland Premier™ 48 Mattoni™ .49 Natural Stone - Sandstone .50 .52 Natural Stone - Limestone Natural Stone - Bucine Bluestone 54 Nordic Cobble NEW .56 .57 Optiloc™. Porcelain Promenade™ Plank Paver61 63 Richcliff® Series[™] 60mm 64 .67 Skyline™ Soreno™ NEW .68 Town Hall® .69 Treo® Smooth .70 .71 Tribeca Cobble[™] .72 Turfstone™ Umbriano[™] 73 .75 Westport™

RETAINING WALLS

Brussels Dimensional Stone®	76
DuraHold®	77
Estate Wall™	78
Lineo™ Dimensional Stone	79
Olde Quarry®	80
Pisa2 [™]	81
SienaEdge™	82
U-Cara®	85
U-Cara® Modular System	89
U-Cara® Rail System	90
COPING, STEPS, PILLAR CAPS	
6x12 Fullnose	95
Architectural Coping	96
Brussels Fullnose [™]	94
SienaStone™	83
SienaStone [™] Smooth Step	84
Universal Coping	91
Ledgestone™	92
FIRE FEATURES	
Sunset Firepit	97
Unilock Elements	98
ACCESSORIES	
Paver Cleaners	100
Paver Sealers	101
Adhesives	101
Sands	103
Miscellaneous Accessories	105
Accessory Quick Reference Guide	110

PRODUCT & INSTALLATION INFORMATION

Finishes & Coatings	19
Application Index/Color Blends	21
Calculations & Thickness Charts	112
Sealer & Polysand Best Practices	114
mportant Notice	116
Terms & Conditions	115
mportant Notes	119
Product Directory	122

UNILOCK®


PRODUCT CATEGORIES

CLASSIC

Our budget-friendly, Unilock Classic pavers and walls are manufactured to exceed ASTM standards for quality and strength. Available in classic shapes and styles, these products utilize a traditional product mix of large and small aggregates that is consistent from top to bottom with color mixed throughout.



The refined surface of Unilock EnduraColor products is achieved with a two-step manufacturing process that combines a base of coarser aggregates for a stronger foundation with concentrated color and wear-resistant finer aggregates on top. This process protects the surface from the appearance of fading over time because the top layer prevents large, lighter color aggregates from ever showing through. Now, with U-Cara®, walls are available with EnduraColor too!

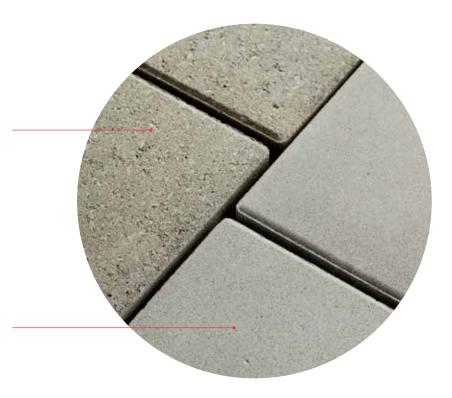


Deep, rich colors and a multitude of unique Reala™ textures combine to deliver the timeless beauty of Unilock Elegance. From the timeworn look of European cobblestones, to the classic luxury of riven natural stone slabs, our Elegance collection offers styles you can't get anywhere else. Thanks to Ultima™ Concrete, the look you purchase is the look that will last, with up to 4x the strength of poured-in-place concrete.





PERMEABLE Think Green



Developed in response to growing concerns around stormwater management, permeable pavers allow rainwater to flow between the joints and back into the subsoil. This provides a dual "green" benefit: it reduces the amount of water sent to storm sewers, and instead provides extra moisture to surrounding plant material.



The pavers used in a permeable installation look similar to traditional pavers, but are made with special spacer bars that create a wider joint.

Special materials are used in the joints and in the permeable base below, to encourage water to flow through and reach the subsoil.

Using permeable pavers will reduce puddling on the pavement when it rains, and decrease ice build-up in winter.



Look for this permeable icon in our Unilock paver collection.

UNILOCK®

EXCLUSIVE TECHNOLOGIES

Reala

Utilizing REALA technology, a multitude of natural stone surfaces, brick and historic cobblestones are cast to create a wide variety of authentic textures with consistent dimensions that are more cost efficient to install.













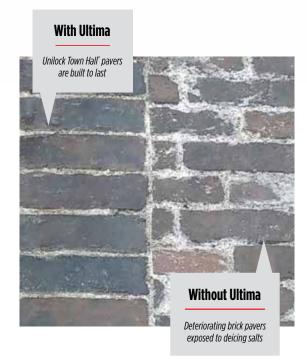

Ultima™

Only Unilock has the technology in North America to manufacture Ultima Concrete resulting in pavers **up to four times stronger** than poured concrete. With Ultima, the look you purchase is the look that will last.

> Ultima Concrete is a key ingredient in the timeless elegance of our Elegance collection of premium pavers.

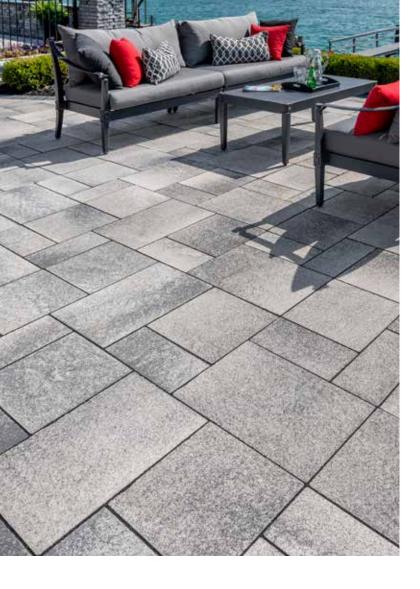

ColorFusion[™]

The look of natural granite is achieved when color and granite particles are randomly dispersed using proprietary ColorFusion technology to achieve a unique mottled surface.





Unlike after-market sealers which merely coat the top, EasyClean goes beyond the surface and becomes integral to the product during manufacturing. The result is enhanced surface color, and protection from stains.



Nothing protects pavers from stains like EasyClean.

EASYCLEAN ADVANTAGES

Pavers are pre-sealed at the factory

Enhanced resistance to weathering

Reduced dirt absorption

Stains from leaves, coffee, ketchup, mustard, wine and BBO oils are easier to remove

Pavers shown on left hand side are Thrumix pavers without EasyClean.
Pavers shown on right hand side are EnduraColor pavers with EasyClean Stain
Resistance Technology.

UP YOUR GAME WITH

Unilyft



- Reduce labor costs
- Install pavers and walls faster and more accurately
- Reduce shoulder, hand, and knee pain
- Improve your bottom line
- Retain employees and attract new ones

SCAN THE QR CODE FOR MORE INFORMATION OR TO CONNECT WITH A UNILOCK TERRITORY MANAGER FOR A HANDS-ON DEMONSTRATION





// PLEASE CONTACT UNILOCK FOR MORE INFORMATION

UNILOCK PAVER REFERENCE GUIDE

UNILOCK PAVERS	Classic	EnduraColor	Elegance	ClassicCoat	SoftTouch	EasyClean	Reala	Ultima	ColorFusion	Permeable
Arcana™		•				•				
Artline™		•			•	•				
Beacon Hill™ Flagstone 60mm		•								
Beacon Hill Flagstone 80mm		•								
Beacon Hill Flagstone XL		•								
Beacon Hill Smooth		•								
Beacon Hill Smooth XL		•								
Bristol Valley®		•			•	•				
Brussels Block*	•									
Copthorne*		•	•				•	•		
Courtstone®		•	•				•	•		
Eco-Priora [™]	•	•								•
Hollandstone™	•									
Holland Premier™		•								
Mattoni™		•								
Nordic Cobble [™]		•								•
Richcliff*		•	•				•	•		
Series 60mm		•								
Series 70mm		•								
Series 80mm		•								
Skyline [™]		•								
Soreno™		•			•	•				
Town Hall*		•	•				•	•		•
Treo™Smooth		•								•
Tribeca Cobble™		•								•
Umbriano™		•				•			•	
Westport™	•			•						

BUILD FASTER VERTICAL FEATURES

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours - not days! Simply build the sturdy, aluminum frame in any configuration and clad it with a wide selection of fascia panels.

SO INNOVATIVE. SO UNILOCK.







SCAN THE QR CODE TO CONNECT WITH A UNILOCK TERRITORY MANAGER FOR MORE INFORMATION





// FLIP TO PAGE 89 TO LEARN MORE

UNILOCK WALL REFERENCE GUIDE

UNILOCK WALLS	Classic	EnduraColor	Reala	ColorFusion	Two-Sided	Garden	Engineered
Brussels Dimensional Stone®	•				•	•	
Estate Wall™	•				•	•	•
Lineo™ Dimensional Stone	•				•	•	
Pisa XL®	•					•	•
SienaEdge™	•				•		•
SienaStone™	•						•
Olde Quarry™	•				•	•	•
U-Cara*		•		•	•	•	•

STEPS	Classic	Reala	Natural
Ledgestone™		•	
SienaStone	•		
Natural Stone - Sandstone			•
Natural Stone - Limestone			•

COPING PAIRING OPTIONS

UNILOCK COPINGS	Architectural Coping	Ledgestone	Natural Stone	Brussels Fullnose	Estate Wall	Pisa
Brussels Dimensional Stone		•	•	•		
Estate Wall		•	•		•	
Lineo Dimensional Stone		•	•			
Pisa2			•			•
Olde Quarry		•	•	•		
U-Cara	•	•	•			


THE IMPORTANCE OF ASPECT RATIO

Simply defined, aspect ratio is the overall length of a paver divided by its height. LENGTH/HEIGHT = ASPECT RATIO


If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.



OVER 5:1 Pedestrian Only




4:1 Light-Duty Vehicular




3:1 OR LESS Heavy-Duty Vehicular

LAYING PATTERN CONSIDERATIONS

The laying pattern used in your application can also add a significant amount of strength to your design. A herringbone pattern provides the best 'lock-up', adding strength against rotational forces such as tires at a roadway intersection in the same way the 'L' shaped paver provides maximum performance.






HEAVY-DUTY CONSIDERATIONS

Unilock has a variety of shapes and sizes available to fit your heavy-duty application and style preferences. For maximum performance where twisting and tipping will be factors, consider the unique "L" interlocking shape as it provides superior resistance under heavy loads. The patented locking features work in tandem with the "tri-axis" technology. The result? A stronger, more stable pavement surface.

Heavy-duty Unilock paving systems are also designed for rapid mechanized installation, making them competitive and affordable.






H-20 & HS-20 LOAD RATING

Similar to top of deck stresses per AASHTO H-20 loading conditions (32,000 lbs/14,500 kg), Unilock pavers can support 3-4 axle vehicles. This would include delivery, fire and semi-truck and trailer traffic in light-duty roadway applications.

SPEAK WITH YOUR UNILOCK REPRESENTATIVE FOR MORE INFORMATION.


NON-PERMEABLE INSTALLATIONS

Having the correct base design is essential for successful residential and commercial projects. Below are a couple of Examples of the base detail; however, every base detail must be specific to site conditions and load capacity. Contact your Unilock Representative to learn more.

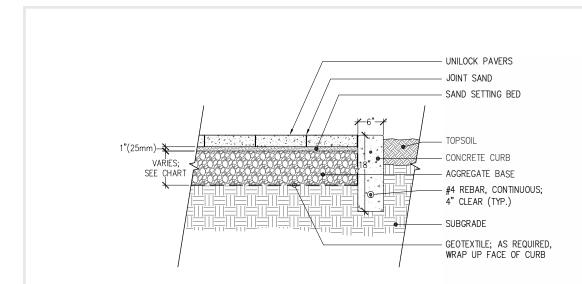

PAVER INSTALLATION ON GRANULAR

From pedestrian to heavy-duty applications this detail is tried and true. Contact your Unilock Representative to learn more. Specific installation details may vary based on site conditions.

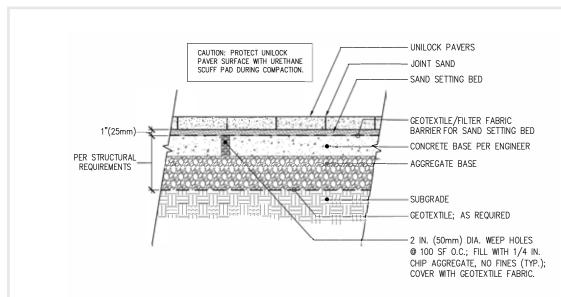


PAVER INSTALLATION ON SAND OVER CONCRETE

Ideal for heavy-duty applications, this detail ensures adequate base support under heavy loads. Approving the proper sand type and gradation is critical for lock up and drainage in vehicular applications. Contact your Unilock Representative to learn more. Specific installation details may vary based on site conditions.


PERMEABLE INSTALLATIONS

Similar to the non-permeable paver systems structural component, permeable paver installations offer a secondary purpose for capturing and detaining rainwater. Common uses can range from sidewalk and plaza areas, to heavy-duty parking lots, driveways and roadways and include various base depths as shown in the two details below.

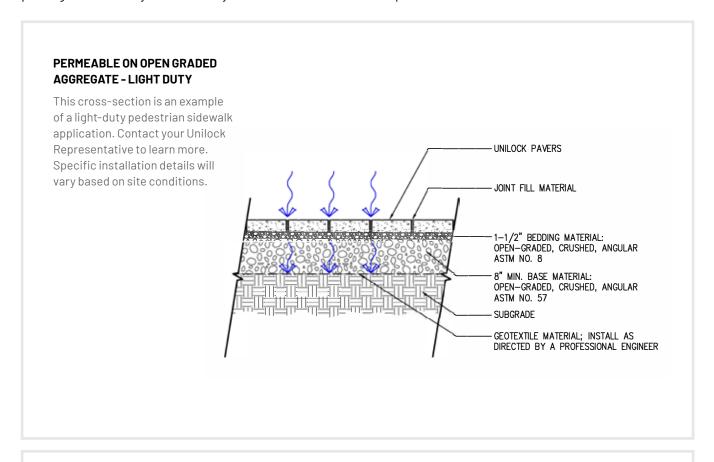


PERMEABLE ON OPEN GRADED AGGREGATE - HEAVY-DUTY


Heavy-duty permeable applications require additional base support as illustrated below. This cross section is only an example. Contact your Unilock Representative to learn more. Specific installation details will vary based on site conditions.

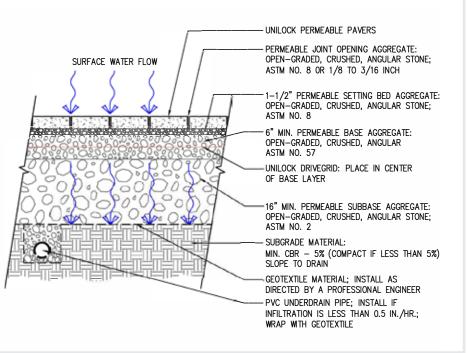

TYPICAL RETAINING WALL CROSS SECTIONS

Unilock manufactured retaining wall systems are engineered to last. Individual units range from 19lbs (8.6kg) to 1,700lbs (772.7kg), and some can be used to construct walls up to 40ft (12.2m) high. Below are a couple of cross section examples, however, retaining walls must be designed and engineered to the specific loads and site conditions.

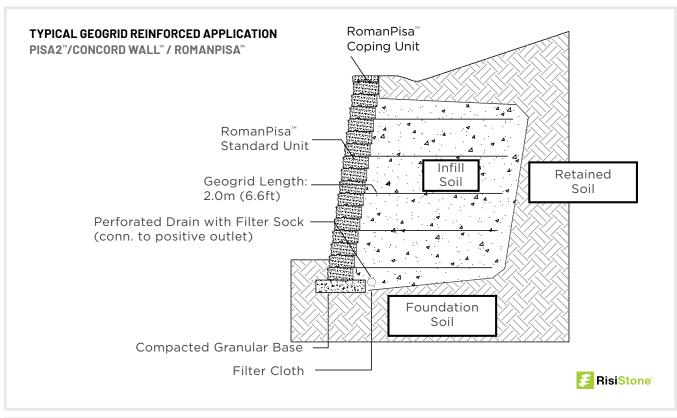

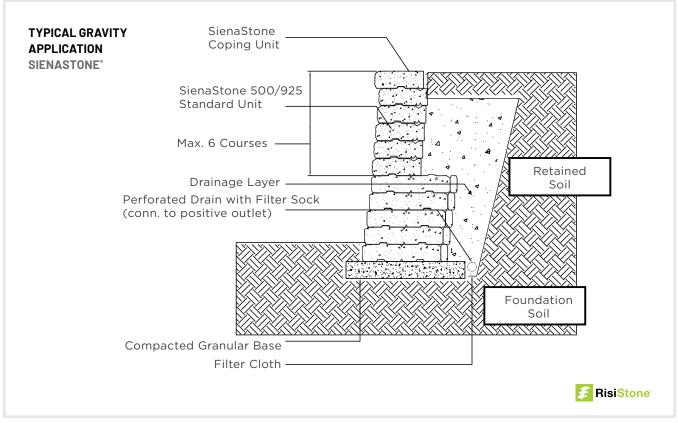

ROOF DECKS

Unilock has many options for paving products on roof decks. Various installation methods will determine the appropriate products for the application. While pedestal installation typically utilizes the square or large slabs, a granular installation will extend your product choice and design flexibility. **Ask your Unilock Representative for details.**





Product Type	Thickness	Shape	Product Weights
Arcana™ + Skyline™	50mm	606 x 606mm	24 lbs/sq.ft.
Soreno™	50mm	400 x 800mm	24 lbs/sq.ft.
Beacon Hill™ XL	60mm	900 x 540mm** 720 x 540mm**	27.5 lbs/sq.ft.



PEDESTAL SYSTEM

Unilock offers adjustable and stackable pedestal systems for your project. Contact your Unilock Representative to learn more. Specific installation details may vary based on pedestal height, load-bearing requirements, safety standards and wind-lift.

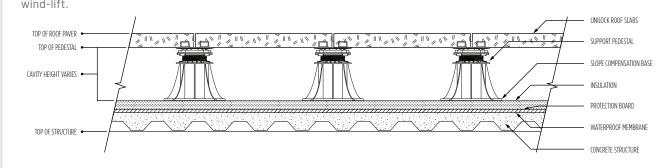

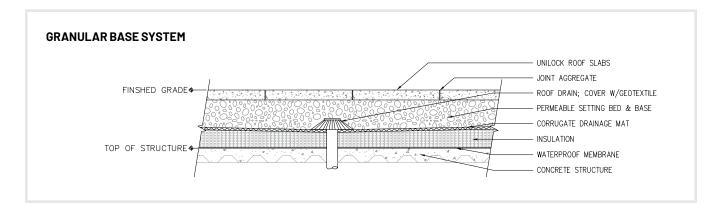

The cross sections shown are examples of the type of installation systems and technical features of Unilock products. Unilock shall not be deemed responsible for improper use of the product or of damage deriving from any

use different from those recommended and/or installation procedures not in line with the following instructions relevant to a raised installation. All roof top slab/pedestal installations must be engineered by a professional engineer.

LEED CREDIT OPPORTUNITIES

LEED, Leadership in Energy & Environmental Design, is a green building certification program that recognizes best-in-class building strategies and practices that have a positive impact on the health of occupants, while promoting renewable, clean energy. To receive LEED certification, building projects satisfy prerequisites and earn points to achieve different levels of certification. Unilock products can help with your certification goals.

POTENTIAL LEED CREDITS FOR UTILIZING PERMEABLE PAVERS

RAINWATER MANAGEMENT: LEED V4.1

Up to three points can be achieved for retaining rainwater onsite based on the percentile kept. 85% (zero lot line projects only) • 3 points, 95% – 2 points and 98% – 3 points. (all except Healthcare – subtract one point). See LEED v4.1 for more specific project/site details.

HEAT ISLAND REDUCTION - NON-ROOF: LEED V4.1

Paving materials with a three-year aged solar reflectance (SR) value of at least 0.28. If three-year aged value information is not available, use materials with an initial SR of at least 0.33 at installation OR use an open grid pavement at least 50% pervious • 2 points (except Healthcare - 1 point). See LEED v4.1 for more specific site calculations.

SOLAR REFLECTANCE

Solar Reflectance Index (SRI) is a criterion used by USGBC that measures values of sunlight and radiation bouncing from built surfaces. It is used to measure urban heat island effects in city centers. Dark pavement absorbs heat during the day and then releases it at night. This process creates a situation that causes urban centers to stay warmer all the time which contributes to air pollution and increased energy consumption. Careful selection of materials and colors can help reduce urban heat island effects.

Values may change slightly by region due to variations in local aggregate and granite, please see product page for SRI values or contact your local Unilock Representative for more information.

MATERIALS AND RESOURCES: LEED V4.1


- > Building Product Disclosure and Optimization Sourcing of Raw Materials
 - Sourcing of Raw Materials and Extraction 1 point
- > Building Product Disclosure and Optimization Material Ingredient Reporting
 - Material Ingredient Reporting 1 point

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX

UVISION

- 3D LANDSCAPE CREATOR





UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.

SCAN THE QR CODE FOR
MORE INFORMATION OR TO
DOWNLOAD A FREE 30-DAY TRAIL
OF UVISION 3D LANDSCAPE CREATOR.



FINISHES



Umbriano° Mottled Finish with ColorFusion™ and EasyClean



Series[™] Exposed Granite Finish



Il Campo° Brushed Finish



Smooth Premier Finish



Flagstone Premier Finish



Antiqued Timeworn Finish



Classic Thrumix Finish

COATINGS





Factory sealed to provide integral surface protection from stains

Classic**Coat**



Factory sealed to protect Surface texture and color

SOFT TOUCH



Ultra-smooth surface texture

DESCRIPTION OF EDGE DETAILS



Zero-Edge



Chamfered Edge



Rounded Bevel



Micro Bevel

UNSIGHTLY STRUCTURES?

U-Cara Wall Mount System



When unsightly buildings, exposed foundation or old steps detract from your paver plan, cover them with the U-Cara Wall Mount System. Simply mount the galvanized steel rails to a concrete or wood substrate and clad with fascia panels for a finishing touch. Create matching vertical features with the U-Cara Modular System to complete your cohesive design. SO INNOVATIVE. SO UNILOCK.

// FLIP TO PAGE 90 TO LEARN MORE



SCAN THE QR CODE TO CONNECT WITH A UNILOCK TERRITORY MANAGER FOR MORE INFORMATION

APPLICATION INDEX







LIGHT VEHICULAR



HEAVY-DUTY VEHICULAR



ROADWAYS-STREETS



PERMEABLE



OUTDOOR KITCHEN



FIRE FEATURE



WATER FEATURE



ROOF DECK



BORDERS & ACCENTS







RETAINING WALLS UNDER 3'



STRUCTURAL WALL



GARDEN WALL



PILLAR



WALL COPING



POOL COPING



STEP TREADS



STEPS

COLOR BLEND DESCRIPTIONS

COLOR NAME	DESCRIPTION
Alpine Grey	Natural, Buff and Charcoal
Arctic Grey	White with Black Accents
Autumn Granite	Black, Red and Yellow
Autumn Red	Red, Buff and Charcoal
Avorio	Beige and White
Basalt	Blue-Black
Bavarian	Brown, Cream and Charcoal
Burgundy Red	Plum with Red
Burnt Clay	Brown with Red
Chamois	Medium Buff
Charcoal	Charcoal
Charleston	Plum, Charcoal and Sand
Cobalt Grey	White, Grey and Blue hues
Cocoa Brown	Solid Dark Brown
Coffee Creek	Sandstone, Brown and Charcoal
Corvara	Light Grey/Beige
Dark Charcoal	Dark Charcoal
Dawn Mist	Grey and Tan
Fossil	Light & Dark Grey, Chamois and White Accents
French Grey	Light Grey with White Flake
Golden Tan	Dark Brown, Light Broan with White Granite
Granite Blend	Natural and Charcoal
Granite Fusion	Charcoal and Natural
Graphite	Blend of Dark Charcoal and Black
Heritage Brown	Dark Brown and Salmon

COLOR NAME	DESCRIPTION
Light Granite	Light Grey with Black Accents
Limestone	Light Grey and Charcoal
Medium Grey	Medium Grey
Midnight Sky	Charcoal and Black Flake
Modena	White Concrete with Black Flecks
Nevada	Chamois and Natural
Nordic Star	Black with White accents
Oakwood	3 color blend of Light, Medium and Dark Brown
Old Oak	Rust with Red
Opal Blend	Light Grey and White
Onyx Black	Dark Charcoal with Black Granite
Pebble Taupe	Tan with Light Brown
Peppered Granite	White Aggregates with Black Flecks
River	Buff, Natural and Charcoal
Sable Blend	Cream, Tan and Brown
Sandstone	Buff and Tan
Sierra	Brown, Sandstone and Charcoal
Smoke Shale	Charcoal and Dark Charcoal
Steel Mountain	Natural and Charcoal
Summer Wheat	Cream White with Pale Yellow & Beige Particles
Toscana Beige	Tan with Brown and White Accents
Tuscany	Sandstone and Tan
Vivanto	Dark Grey and Charcoal
Winter Marvel	White and Black Flake

ADA Paver CLASSIC



APPLICATIONS







APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits see page 17.

SQFT PER	Bundle Type Plant Produced Thickness (mm) Bundle	SINGLE CHICAGO 70MM
SQFT PER	Thickness (mm)	
SQFT PER		70MM
SQFT PER	Bundle	
SQFT PER		93.04
SQFIPER -	Layer	11.63
,	Section	-
	Stone	0.97
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.02
SOLDIER LNFT PER	Section	-
OGESIER ERIT I I ER	Layer	11.81
	Bundle	94.49
	0~54	1.02
	SqFt	1.02
SAILOR LNFT PER	Section	-
	Layer	11.81
	Bundle	94.49
	SqFt	1.03
UNITS PER	Section	-
	Bundle	96.00
_	Layer	389
LBS PER	Section	-
	Bundle	3,114

COLORS	Reflectance	Stock
Charcoal	SR n/a SRI n/a	so
Red	SR n/a SRI n/a	SO





CHARCOAL

RED

Single Units




STANDARD300 x 300 x 70mm
11% x 11% x 2 ¾
96 units/Bundle
.97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply, SOLD IN FULL BUNDLES ONLY. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Anchorlock A

APPLICATIONS









APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits see page 17.

		8 % X 8 %
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	80MM
	Bundle	86.72
	Layer	10.84
SQFT PER	Section	-
	Stone	0.41
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	
	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	_
	Section	
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	2.46
UNITS PER	Section	-
	Bundle	213.36
	Lavor	374
I De DED	Layer	3/4
LBS PER	Section	2,991
	Dallale	2,331

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO



NATURAL

Single Units



STANDARD225 x 225 x 80mm
8 % x 8 % x 3 %
213.36 units/Bundle
.41 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Product is optimized for mechanical installation. All measurements are nominal. Contact Unilock for more information.





	12 X 24	18 X 24	24 X 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50MM	50MM	50MM
I nickness (mm)	50MM	50MM	50IM

	Bundle	36.00	54.00	72.00
COLT DED	Layer	4.00	6.00	8.00
SQFT PER	Section	-	-	-
	Stone	2.00	3.00	4.00

PER RUNDI E	Layers	9.00	9.00	9.00
PER BUNDLE	Sections	-	-	-

	SqFt	0.49	0.50	0.50	
	SOLDIER LNFT PER	Section	-	-	-
		Layer	1.98	2.97	3.98
		Bundle	17.78	26.75	35.79


	SqFt	0.99	0.66	0.50	
	SAILOR LNFT PER	Section	-	-	-
		Layer	3.98	3.98	3.98
		Bundle	35.79	35.79	35.79

	SqFt	0.50	0.33	0.25
UNITS PER	Section	-	-	-
	Bundle	18.00	18.00	18.00

	Layer	96	144	192
LBS PER	Section	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Corvara	SR n/a SRI n/a	✓	1	✓
Avorio	SR n/a SRI n/a	✓	✓	✓
Modena	SR n/a SRI n/a	1	✓	✓
Vivanto	SR n/a SRI n/a	✓	1	✓

LAYING PATTERNS



Arcana Random A



Arcana Random C



Arcana Random F

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits see page 17.







CORVARA



MODENA



VIVANTO



X & T Slab Spacers Bagged Separately (see page 108)





12 X 24 301 x 606 x 50mm 11% x 23% x 2" 18 units/Bundle 2 Sq.Ft./Stone



18 X 24 453 x 606 x 50mm 17% x 23% x 2" 18 units/Bundle 3 Sq.Ft./Stone



24 X 24 606 x 606 x 50mm 23 1/8 x 23 1/8 x 2" 18 units/Bundle 4 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Unilock recommends installing Arcana using X & T Slab Spacers. Please see page 108. Contact Unilock for more information.

Artline[™] Smooth Finish





LAYING PATTERNS



Artline Random A

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.




BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN

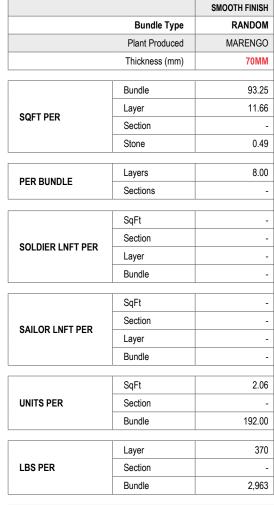

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	1
Fossil	SR n/a SRI n/a	1
Steel Mountain	SR n/a SRI n/a	✓





UNIT A 125 x 169 x 70mm 4 1/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone



UNIT B

125 x 262.5 x 70mm $4\% \times 10\% \times 2\%$ 32 units/Bundle .35 Sq.Ft./Stone





125 x 337.5 x 70mm 4 1/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone



UNIT D 125 x 450 x 70mm 4 1/8 x 17 3/4 x 2 3/4"

32 units/Bundle .61 Sq.Ft./Stone



187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 units/Bundle .45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm 7½ x 13 3/8 x 2 3/4" 16 units/Bundle .69 Sq.Ft./Stone



UNIT G

187.5 x 450 x 70mm 71/2 x 173/4 x 23/4" 16 units/Bundle .91 Sq.Ft./Stone



Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

Sections

SqFt Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section Bundle

Layer

Section

Bundle

Reflectance

SR .18 SRI 17

SR .17 SRI 15

SR .35 SRI 38

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

French Grey

Midnight Sky

Winter Marvel

UMBRIANO FINISH

RANDOM MARENGO

70MM

93.25

11.66

0.49

8.00

2.06

192.00

373

2,986

Stock

1

1

1



LAYING PATTERNS



Artline Random A

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.



FRENCH GREY NEW



MIDNIGHT SKY



WINTER MARVEL





UNIT A125 x 169 x 70mm
4 % x 6 % x 2 %"
32 units/Bundle
.23 Sq.Ft./Stone



UNIT B125 x 262.5 x 70mm
4 % x 10 3% x 2 34"
32 units/Bundle
.35 Sq.Ft./Stone





UNIT C 125 x 337.5 x 70mm 4% x 13% x 2 %" 32 units/Bundle .45 Sq.Ft./Stone



UNIT D125 x 450 x 70mm
4 % x 17 4 x 2 4"
32 units/Bundle
.61 Sq.Ft./Stone



UNIT E187.5 x 225 x 70mm
7½ x 8% x 2¾"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT F187.5 x 337.5 x 70mm
7½ x 13¾ x 2¾"
16 units/Bundle
.69 Sq.Ft./Stone



UNIT G187.5 x 450 x 70mm
7½ x 17¾ x 2¾"
16 units/Bundle
.91 Sq.Ft./Stone

Artline™ Il Campo® Finish





LAYING PATTERNS



Artline Random A

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Il Campo Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		IL CAMPO FINISH
	Bundle Type	RANDOM
	Plant Produced	CHICAGO
	Thickness (mm)	70MM
	Bundle	93.25
SQFT PER	Layer	11.66
OQ: 11 EK	Section	-
	Stone	0.49
	Lavors	8.00
PER BUNDLE	Layers	0.00
	Sections	-
	SqFt	-
OOL DIED I NET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	
	Section	-
SAILOR LNFT PER		-
	Layer	-
	Bundle	-
	SqFt	2.06
UNITS PER	Section	-
	Bundle	192.00
	Lavor	370
LBS PER	Layer	370
LD3 PEK		-
	Bundle	2,963

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	/
Granite Blend	SR n/a SRI n/a	/



BAVARIAN BLEND



GRANITE BLEND





UNIT A125 x 169 x 70mm
4 % x 6 ¾ x 2 ¾"
32 units/Bundle
.23 Sq.Ft./Stone



UNIT B125 x 262.5 x 70mm
4% x 10 % x 2 ¾"
32 units/Bundle
.35 Sq.Ft./Stone





UNIT C125 x 337.5 x 70mm
4 % x 13 % x 2 ¾"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT D125 x 450 x 70mm
4 % x 17 % x 2 %"
32 units/Bundle
.61 Sq.Ft./Stone



UNIT E187.5 x 225 x 70mm
7½ x 8% x 2¾"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT F187.5 x 337.5 x 70mm
7½ x 13¾ x 2¾"
16 units/Bundle
.69 Sq.Ft./Stone



UNIT G187.5 x 450 x 70mm
7½ x 17¾ x 2¾"
16 units/Bundle
.91 Sq.Ft./Stone





LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		XL UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60MM	60MM

COLT DED	Bundle	104.60	104.60
	Layer	10.46	10.46
SQFT PER	Section	-	-
	Stone	1.31	5.23

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

	SOLDIER LNFT PER	SqFt	-	0.34
		Section	-	-
		Layer	-	3.54
		Bundle	-	35.43

	SqFt	0.85	0.56	
	SAILOR LNFT PER	Section	-	-
		Layer	8.86	5.91
		Bundle	88.58	59.06

	UNITS PER	SqFt	0.76	0.19
		Section	-	-
		Bundle	80.00	20.00

l		Layer	290	266	
	LBS PER	Section	-	-	
		Bundle	2,896	2,665	

COLORS	Reflectance	Stock	Stock
Alpine Grey	SR n/a SRI n/a	✓	✓
Bavarian	SR n/a SRI n/a	✓	1
Fossill	SR n/a SRI n/a	✓	✓
Oakwood	SR n/a SRI n/a	✓	/



ALPINE GREY



BAVARIAN BLEND



FOSSIL



XL Sold Separately

OAKWOOD

LIMITED QUANTITIES REMAINING

See page 29 for NEW SIZE BEACON HILL FLAGSTONE FOR 2022.





LARGE RECTANGLE 360 x 540 x 60mm 14¼ x 21¼ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 360 x 180 x 60mm 14¼ x 7 x 2 ¾s" 30 units/Bundle .69 Sq.Ft./Stone



XL unit sold separately

XL UNIT 900 x 540 x 60mm 35½ x 21¼ x 2¾ " 20 units/Bundle 5.23 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Unit




COMING IN 2022 - NEW SIZES




LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		XL UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60MM	60MM
D "	440 ==	440 ==

OOFT DED	Bundle	116.57	116.57
	Layer	11.66	11.66
SQFT PER	Section	-	-
	Stone	1.46	5.83

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-
	SqFt	-	0.32

		- 1		***-
	SOLDIER LNFT PER	Section	-	-
		Layer	-	3.74
		Bundle	-	37.40

	SqFt	0.80	0.53
SAILOR LNFT PER	Section	-	-
SAILOR LINFT PER	Layer	9.35	6.23
	Bundle	93.50	62.30

	SqFt	0.69	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00

	Layer	327	324
LBS PER	Section	-	-
	Bundle	3,227	3,241

COLORS	Reflectance	Stock	Stock
Alpine Grey	SR n/a SRI n/a	/	✓
Bavarian	SR n/a SRI n/a	/	✓
Fossill	SR n/a SRI n/a	/	✓
Oakwood	SR n/a SRI n/a	/	✓



ALPINE GREY



BAVARIAN BLEND



FOSSIL



Sold Separately

×

OAKWOOD

Random Bundle Unit



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 60mm $15 \times 15 \times 2 \frac{3}{8}$ " 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 7½ x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



XL unit sold separately

XL UNIT 950 x 570 x 60mm $37\frac{1}{2} \times 22\frac{1}{2} \times 2\frac{3}{8}$ " 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Flagstone 80mm






LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80MM

SQFT PER	Bundle	73.22
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	-
	Bundle	-
'		

	SqFt	0.85
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	8.86
	Bundle	62.00

	SqFt	0.76
UNITS PER	Section	-
	Bundle	56.00

	Layer	384
LBS PER	Section	-
	Bundle	2,686

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossill	SR n/a SRI n/a	✓



BAVARIAN BLEND



FOSSIL

LIMITED QUANTITIES REMAINING

See page 31 for NEW SIZE BEACON HILL FLAGSTONE FOR 2022.



LARGE RECTANGLE 360 x 540 x 80mm 14 ¼ x 21 ¼ x 3 ⅓" 14 Units/Bundle

2.08 SqFt/Stone



SQUARE 360 x 360 x 80mm 14 ¼ x 14 ¼ x 3 ½" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 360 x 180 x 80mm 14¼ x 7 x 3 1/6" 21 units/Bundle .69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

3 Unit Random Bundle




COMING IN 2022 - NEW SIZES




LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80MM

SQFT PER	Bundle	81.60
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	7.00
	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	-
	Bundle	-

	SqFt	0.80
SAILOR LNFT PER	Section	-
SAILUR LINFT PER	Layer	9.35
	Bundle	65.45

	SqFt	0.69
UNITS PER	Section	-
	Bundle	56.00

	Layer	421
LBS PER	Section	-
	Bundle	2,944

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	√
Fossill	SR n/a SRI n/a	✓



BAVARIAN BLEND



FOSSIL

LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 ½ " 14 Units/Bundle 2.08 SqFt/Stone



SQUARE380 x 380 x 80mm
15 x 15 x 3 1/6"
21 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3⅓" 21 units/Bundle .69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

3 Unit Random Bundle






LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		XL - 22 ½ x 37 ½
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60MM	60MM
B "	440.57	440.57

	Bundle	116.57	116.57
SQFT PER	Layer	11.66	11.66
SUFIFER	Section	-	-
	Stone	1.46	5.83

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-
	C~Ft		0.22

	Syrı	-	0.32
SOLDIER LNFT PER	Section	-	-
SOLDIER LINFT PER	Layer	-	3.74
	Bundle	-	37.40

SAILOR LNFT PER	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30

	SqFt	0.69	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00

	Layer	337	320	
LBS PER	Section	-	-	
	Bundle	3,373	3,199	

	COLORS	Reflectance	Stock	Stock
	Bavarian	SR n/a SRI n/a	✓	✓
	Fossil	SR .22 SRI 21	/	1
	Granite Fusion	SR .28 SRI 29	/	✓
Ì	Opal Blend	SR .24 SRI 24	1	✓



BAVARIAN



FOSSIL



GRANITE FUSION



OPAL BLEND

XL Sold Separately

3 Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 7½ x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm 37½ x 22½ x 2¾" 20 units/Bundle 5.83 Sq.Ft./Stone

XL unit sold separately

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80MM

	Bundle	81.60
SOUT DED	Layer	11.66
SQFT PER	Section	-
	Stone	1.46

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
JOLDIER LINFT PER	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	65.45

	SqFt	0.69
UNITS PER	Section	-
	Bundle	56.00

	Layer	432
LBS PER	Section	-
	Bundle	3,026

COLORS	Reflectance	Stock
Bavarian	SR .22 SRI 21	✓
Fossil	SR .28 SRI 29	SO
Granite Fusion	SR .28 SRI 29	/
Opal	SR .28 SRI 29	SO



BAVARIAN BLEND



FOSSIL SPECIAL ORDER GRANITE FUSION





OPAL SPECIAL ORDER

3 Unit Random Bundle

LARGE RECTANGLE 380 x 570 x 80mm $15 \times 22 \frac{1}{2} \times 3 \frac{1}{8}$ " 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 31/8" 21 units/Bundle .69 Sq.Ft./Stone






LAYING PATTERNS



BristolValley Random A



BristolValley Random B



Bristol Valley Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		XL UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60MM	60MM

SQFT PER	Bundle	104.60	104.60
	Layer	10.46	10.46
	Section	-	-
	Stone	1.31	5.23

PER BUNDLE	Layers	10.00	10.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.34
	Section	-	-
SOLDIER LINFT PER	Layer	-	3.54
	Bundle	-	35.43

SAILOR LNFT PER	SqFt	0.85	0.56
	Section	-	-
	Layer	8.86	5.91
	Bundle	88.58	59.06

	SqFt	0.76	0.19
UNITS PER	Section	-	-
	Bundle	80.00	20.00

	Layer	311	295
LBS PER	Section	-	-
	Bundle	2,946	2,977

COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	/	✓
Fossil	SR n/a SRI n/a	/	✓
Steel Mountain	SR n/a SRI n/a	/	/



BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN

LIMITED QUANTITIES REMAINING

See page 35 for NEW SIZE BRISTOL VALLEY FOR 2022.



LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



SOUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 360 x 180 x 60mm 141/4 x 7 x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 900 x 540 x 60mm 351/2 x 211/4 x 23/8" 20 units/Bundle 5.23 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

XL Sold Separately




COMING IN 2022 - NEW SIZES



LAYING PATTERNS



BristolValley Random A



BristolValley Random B



Bristol Valley Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		XL UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60MM	60MM

SQFT PER	Bundle	116.57	116.57
	Layer	11.66	11.66
	Section	-	-
	Stone	1.46	5.83

PER BUNDLE	Layers	10.00	10.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.32
	Section	-	-
	Layer	-	3.74
	Bundle	-	37.40

SAILOR LNFT PER	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30

	SqFt	0.69	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00

	Layer	321	326
LBS PER	Section	-	-
	Bundle	3,210	3,255

COLORS	Reflectance	Stock	Stock
Bavarian Blend	SR n/a SRI n/a	✓	1
Fossil	SR n/a SRI n/a	✓	1
Steel Mountain	SR n/a SRI n/a	/	1



BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN

3 Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 60mm $15 \times 22 \frac{1}{2} \times 2\frac{3}{8}$ " 20 Units/Bundle 2.08 SqFt/Stone



SOUARE 380 x 380 x 60mm 15 x 15 x 23/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 ½ x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm 37½ x 22½ x 2¾" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

Sections

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Fossil

Bavarian Blend

Steel Mountain

TEXTURED ENDURACOLOR

RANDOM MARENGO

80MM

73.22

10.46

1.31

7.00

0.85

8.86

62.01

0.76

56.00

381

2,665

Stock

1


SO



LAYING PATTERNS



BristolValley Random A



BristolValley Random B

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.



BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN



LARGE RECTANGLE 360 x 540 x 80mm 14¼ x 21¼ x 3½" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE360 x 360 x 80mm
141/4 x 141/4 x 31/8"
21 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE 360 x 180 x 80mm 141/4 x 7 x 31/8" 21 units/Bundle

.69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

3 Unit Random Bundle



RANDOM MARENGO

80MM

81.60

11.66

1.46

7.00

0.80

9.35

65.45

0.69

56.00

432

3,026

Stock

1

SO

1

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

Sections

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

COMING IN 2022 - NEW SIZES

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS


Fossil

Bavarian Blend


Steel Mountain



LAYING PATTERNS



BristolValley Random A



BristolValley Random B

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.



BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 1/8"

14 Units/Bundle 2.08 SqFt/Stone



SOUARE 380 x 380 x 80mm 15 x 15 x 31/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE

380 x 190 x 80mm 15 x 7 ½ x 3 1/8" 21 units/Bundle 69 Sq.Ft./Stone


Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Random Bundle


3 Unit



-		7		
		A		
1	1	V	THE STATE OF THE S	
		10	1	



Brussels Multi-Unit Random AC



Brussels Multi-Unit Random AD



Brussels Multi-Unit Random AE

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		HALF	STANDARD	XL
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	70MM	70MM	70MM
	Bundle	88.70	94.91	95.70
	Layer	11.09	11.86	9.57
SQFT PER	Section	12.67	15.82	31.90
	Stone	0.20	0.40	0.80
	Layers	8.00	8.00	10.00
PER BUNDLE	Sections	7.00	6.00	3.00
	SqFt	1.72	1.44	0.86
	Section	21.84	22.70	27.30
SOLDIER LNFT PER	Layer	19.11	17.03	8.19
	Bundle	152.86	136.22	81.89
	SqFt	2.87	1.73	1.43
	Section	36.33	27.30	45.67
SAILOR LNFT PER	Layer	31.78	20.47	13.70
	Bundle	254.28	163.78	137.01
	SqFt	5.05	2.53	1.25
UNITS PER	Section	64.00	40.00	40.00
	Bundle	448.00	240.00	120.00
	Layer	358	389	311
LBS PER	Section	409	518	1,037
		100	0.10	1,001

COLORS	Reflectance	Stock	Stock	Stock
Coffee Creek	SR n/a SRI n/a	✓	✓	✓
Limestone	SR .28 SRI 29	1	1	✓
River	SR n/a SRI n/a	1	1	✓
Sandstone	SR .41 SRI 46	1	1	✓
Sierra	SR n/a SRI n/a	1	/	1



COFFEE CREEK



LIMESTONE



RIVER



Bundle

SANDSTONE



2,865

SIERRA



104 x 173 x 70mm $4 \times 6 \% \times 2 \%$ " 448 units/Bundle .20 Sq.Ft./Stone



STANDARD 173 x 208 x 70mm $6\% \times 8\% \times 2\%$ " 240 units/Bundle .40 Sq.Ft./Stone



208 x 348 x 70mm $8 \frac{1}{4} \times 13 \frac{3}{4} \times 2 \frac{3}{4}$ " 120 units/Bundle .80 Sq.Ft./Stone

3,110

3,112

Notes: Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Units







Copthorne BW A



Copthorne RB C

APPLICATIONS





APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA[™]

 ${\it Cast from\ historic\ street\ pavers}$

ULTIMA™

Up to 4x stronger than poured-in-place contrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	60MM
	Bundle	89.20
	Layer	11.15
SQFT PER	Section	11.10
	Stone	0.15
	Storie	0.13
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	0-54	1.43
	SqFt	1.43
SOLDIER LNFT PER	Section	-
	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Section	-
SAILOR LNFT PER	Layer	49.21
	Bundle	393.70
	1 0.5:	2.70
	SqFt	6.73
UNITS PER	Section	-
	Bundle	600.00
	Layer	294
LBS PER	Section	-
	Bundle	2,349
		T.

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

BURGUNDY RED/BURNT CLAY/OLD OAK 3-Color Blend is sold separately and blended on-site.



STANDARD 65 x 200 x 60

65 x 200 x 60mm 25% x 7% x 23%" 600 Units/Bundle .15 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 114. Contact Unilock for more information.

Single Unit







Courtstone Fixed Random A

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 15 mm Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from historic street pavers

$\textbf{ULTIMA}^{\!\scriptscriptstyle{\mathsf{M}}}$

Up to 4x stronger than poured-in-place contrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	Bundle Type	RANDOM
Plant Produced		AYR
	Thickness (mm)	60MM
	Bundle	98.30
	Layer	12.29
SQFT PER	Section	-
	Stone	0.26
	Layers	8.00
PER BUNDLE	Sections	-
	0-54	
	SqFt	-
SOLDIER LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	2.25
CAN OR LAIFT BER	Section	-
SAILOR LNFT PER	Layer	27.69
	Bundle	221.52
	SqFt	3.91
UNITS PER	Section	-
	Bundle	384.00
	Layer	291
LBS PER	Section	251
LDQ FLIX	Bundle	2,326
	Duildie	2,320
COLORS	Reflectance	Stock

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓



BASALT

5 Unit Random Bundle



XL RECTANGLE 215 x 130 x 60mm 8 % x 5 % x 2 %" 128 Units/Bundle .30 SqFt/Stone



LARGE RECTANGLE185 x 130 x 60mm
71/4 x 51/8 x 23/8"
64 Units/Bundle
.28 SqFt/Stone



RECTANGLE165 x 130 x 60mm
6½ x 5⅓ x 2¾"
64 Units/Bundle
.23 SqFt/Stone



SMALL RECTANGLE145 x 130 x 60mm
5 ¾ x 5 ½ x 2 ½ "
64 Units/Bundle
.20 SqFt/Stone



SQUARE130 x 130 x 60mm
51/8 x 51/8 x 23/6"
64 Units/Bundle
.18 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. **Please refer to the Polymeric Sand Best Practices on Page 114.** Contact Unilock for more information.





Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

SqFt Section

Layer

Bundle

SqFt

Section

Layer Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

Please contact your local Sales Representative for color options.

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

ALL FINISHES

RANDOM

CHICAGO 100MM

55.17

11.03

0.34 5.00

2.90

160.00

513

2,564

Stock



LAYING PATTERNS



Ecoline Fixed Random A

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

APPLICATIONS









APPEARANCE

Edge Detail - Micro Surface Texture - Smooth / Umbriano Mottled Joint Spacing - 6.25 mm Void - 5.80%

TECHNOLOGIES

PERMEABLE™

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory sealed to provide integral surface protection from stains

COLOR FUSION™ (Umbriano)

Subtly mottled color finish



CLASSIC Thrumix Finish



IL CAMPO® **Brushed Finish**



SERIES™ **Exposed Granite Finish**



SMOOTH Premier Finish



Custom Colors & Finishes



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



UNIT A 357 x 84 x 100mm 14 x 3 ⁵/₁₆ x 3 ⁷/₈" 20 Units/Bundle .32 SqFt/Stone



UNIT B 317 x 84 x 100mm 12½ x 35/16 x 31/8" 20 Units/Bundle .29 SqFt/Stone



UNIT C 277 x 84 x 100mm $12 \times 3\frac{5}{16} \times 3\frac{7}{8}$ " 20 Units/Bundle .25 SqFt/Stone



UNIT D 237 x 84 x 100mm 93/8 x 35/16 x 37/8" 20 Units/Bundle .21 SqFt/Stone



UNIT E 357 x 114 x 100mm 14 x 4 ½ x 3 1/8" 20 Units/Bundle .44 SqFt/Stone



UNIT F 317 x 114 x 100mm 12½ x 4½ x 3%" 20 Units/Bundle .39 SqFt/Stone



UNIT G 277 x 114 x 100mm 11 x 4 ½ x 3 %" 20 Units/Bundle .34 SqFt/Stone



UNIT H 237 x 114 x 100mm 93/8 x 41/2 x 37/8" 20 Units/Bundle .29 SqFt/Stone

Notes: Special Order - Lead time required. Minimum quantities apply, SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Random Bundle

Unit









EcoOptiloc Cluster A

APPLICATIONS









APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 7mm Void - 7.3%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

	ALL FINISHES
Bundle Type	SINGLE
Plant Produced	
Thickness (mm)	80MM

	Bundle	84.80
SOET DED	Layer	10.60
SQFT PER	Section	-
	Stone	0.50

PER BUNDLE	Layers	8.00
PER DUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Section	-
SAILOR LIFT PER	Layer	-
	Bundle	-

	SqFt	1.98	
UNITS PER	Section	-	
	Bundle	168.00	

	Layer	363
LBS PER	Section	-
	Bundle	2,908

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO

Please contact your local Sales Representative for color options.



CLASSIC Thrumix Finish



IL CAMPO® **Brushed Finish**



SERIES™ Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



STANDARD ENDURACOLOR 250 x 250 x 80mm 9 1/8 x 9 1/8 x 3 1/8" 168 Units/Bundle .50 SqFt/Stone







		SMOOTH CLASSIC	SMOOTH ENDURACOLOR
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	80MM	80MM
	Bundle	75.95	75.95
SQFT PER	Layer	10.85	10.85
JUFIFER	Section	-	-
	Stone	0.31	0.31
DED DUNDI E	Layers	7.00	7.00

Sections

Section

Bundle

LAYING PATTERNS



EcoPriora 5x10 RB_A



EcoPriora 5x10 HB_E

APPLICATIONS







PER BUNDLE

LBS PER

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 7mm Void - 4.6-7.08%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	SqFt	1.27	1.27			
SOLDIER LNFT PER	Section	-	-			
SOLDIER LINFT PER	Layer	13.78	13.78			
	Bundle	96.46	96.46			
	SqFt	2.54	2.54			
SAILOR LNFT PER	Section	-	-			
SAILUR LINFT PER	Layer	27.56	27.56			
	Bundle	192.91	192.91			
	SqFt	3.23	3.23			
UNITS PER	Section	-	-			
	Bundle	245.00	245.00			
	Layer	381	381			

COLORS	Reflectance	Stock	Stock
Granite and Sable Blend	SR n/a SRI n/a	SO	✓
River & Sierra	SR n/a SRI n/a	/	SO
Custom Colors & Finishes	SR .26 SRI 27	SO	SO
Please contact your loc	al Sales Represen	tative for color options.	



GRANITE **ENDURACOLOR**



SABLE BLEND NEW **ENDURACOLOR**



RIVER CLASSIC



SIERRA CLASSIC

Note: Smooth Classic Herringbone, Premier Herringbone and II Campo⁶ Herringbone Finishes are all Special Order.

2,669





RECTANGLE (Classic) 120 x 240 x 80mm

 $4 \frac{3}{4} \times 9 \frac{1}{2} \times 3 \frac{1}{8}$ " 245 units/Bundle .31 Sq.Ft./Stone



RECTANGLE (Enduracolor)

120 x 240 x 80mm 4 3/4 x 9 1/2 x 3 1/8" 245 units/Bundle .31 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. EndurColor products are SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

2,669



ENDURACOLOR" CLASSIC



		SMOOTH - CLASSIC	SMOOTH - ENDURA	SERIES™ EXPOSED
Bundle Type		SINGLE	SINGLE	SINGLE
Plant Produced		CHICAGO	CHICAGO	CHICAGO
Thickness (mm)		100MM	100MM	100MM
	Bundle	63.94	63.94	63.94
COET DED	Layer	10.66	10.66	10.66
SQFT PER	Section	_	_	_


LAYI			



EcoPromenade 3x12 RB_A



EcoPromenade 3x12 HB_C



EcoPromenade 3x12 DHB_B

APPLICATIONS









APPEARANCE

Edge Detail - Micro Surface Texture - Smooth & Series Exposed Joint Spacing - 7 mm Void - 10.12 %

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

SQFT PER	Layer	10.66	10.66	10.66
	Section	-	-	-
	Stone	0.24	0.24	0.24
		T	I	
PER BUNDLE	Layers	6.00	6.00	6.00
	Sections	-	-	-
	SqFt	1.02	1.02	1.02
OOLDIED LIVET DED	Section	-	-	-
SOLDIER LNFT PER	Layer	10.83	10.83	10.83
	Bundle	64.96	64.96	64.96
	SqFt	4.06	4.06	4.06
	·	4.00	4.00	4.00
SAILOR LNFT PER	Section	-	-	-
OAILON LIN 11 LIN	Layer	43.31	43.31	43.31
	Bundle	259.84	259.84	259.84
	SqFt	4.13	4.13	4.13
UNITS PER	Section	-	-	-
	Bundle	264.00	264.00	264.00
	Layer	465	465	465
	20,01	400	1 400	1 400

COLORS	Reflectance	Stock	Stock	Stock	
Custom Colors & Finishes	SR n/a SRI n/a	so	so	so	
Please contact your local Sales Representative for color options.					



CLASSIC Thrumix Finish



IL CAMPO® **Brushed Finish**



LBS PER

Exposed Granite Finish



Section

Bundle

SM00TH Premier Finish



2,789

2,789

2,789

UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean






STANDARD 75 x 300 x 100mm 3 x 11 % x 3 %" 264 units/Bundle .24 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Subject $\,\,$ Received Size





8" X 8" UMBRIANO HEX



LAYING PATTERNS



HexPaver A

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - n/a Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

COLORFUSION™

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

		0 X 0 ONIDITIANO ILX
	Bundle Type	SINGLE
	Plant Produced	MARENGO
	Thickness (mm)	60MM
	Bundle	108.31
COST DED	Layer	10.83
SQFT PER	Section	-
	Stone	0.45
DED DUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	-
001 DIED I NET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Section	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	2.22
UNITS PER	Layer	-
	Bundle	240.00
	Layer	302
LBS PER	Section	-
	Bundle	3,024

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓





HEX 205 x 205 x 60mm $8 \times 8 \times 2^{3/8}$ " 240 Units/Bundle .45 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



Hollandstone 4x8 RB_B



Hollandstone 4x8 HB_C



Hollandstone 4x8 BW_D

APPLICATIONS





APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	SMOOTH - CLASSIC
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60MM
Rundle	118.00
	11.80
,	19.67
	0.22
Otorio	0.22
Layers	10.00
Sections	6.00
SaEt	1.50
	29.53
	17.72
	177.17
Dulidie	171.11
SqFt	3.00
Section	59.06
Layer	35.43
Bundle	354.33
CaEt	4.58
	90.00
	540.00
Dunule	540.00
Layer	323
Section	538
Bundle	3,229
	Plant Produced Thickness (mm) Bundle Layer Section Stone Layers Sections SqFt Section Layer Bundle SqFt Section Layer Bundle SqFt Section Layer Bundle Layer Bundle Layer Section Layer Section Layer Section SqFt Section Layer Section SqFt Section

COLORS	Reflectance	Stock
Autumn Red	SR n/a SRI n/a	✓
Charcoal	SR .12 SRI 9	✓
River	SR .32 SRI 34	✓
Sierra	SR n/a SRI n/a	✓



AUTUMN RED



CHARCOAL



RIVER



SIERRA

Single Unit



STANDARD100 x 200 x 60mm
3 % x 7 % x 2 3/6"
540 units/Bundle
.22 Sq.Ft./Stone

Notes: Important: A unethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





Hollandstone 4x8 RB_B



Hollandstone 4x8 HB_C



Hollandstone 4x8 BW_D

APPLICATIONS







APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SMOOTH CLASSIC HERRINGBONE	SMOOTH CLASSIC
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	80MM	80MM
	Bundle	82.50	82.60
COET DED	Layer	11.79	11.80
SQFT PER	Section	-	-
	Stone	0.22	0.22
DED DUNDLE	Layers	7.00	7.00
PER BUNDLE	Sections	-	-
	SqFt	1.50	1.50
	Section	-	-
SOLDIER LNFT PER	Layer	17.72	17.71
	Bundle	124.02	124.00
	SqFt	-	-
CAIL OR LAIFT DED	Section	-	-
SAILOR LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	4.58	4.58
UNITS PER	Section	-	-
	Bundle	378.00	378.00
	Layer	420	423
LBS PER	Section	-	-
	Bundle	2,942	2,960
COLORS	Reflectance	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a		SO



CLASSIC SMOOTH Thrumix Finish



ENDURACOLOR™ Facemix Finish



SERIES™ Exposed Granite Finish

Single Unit



STANDARD100 x 200 x 80mm
3 % x 7 % x 3 1/8"
378 units/Bundle
.22 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.

All measurements are nominal. Contact Unilock for more information.







HollandPremier 4x8 RB_B



HollandPremier 4x8 HB_C



HollandPremier 4x8 BW_D

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	Bundle Type	SINGLE			
	Plant Produced				
	Thickness (mm)	60MM			
	Bundle	118.00			
SQFT PER	Layer	11.80			
	Section	-			
	Stone	0.22			
	Layers	10.00			
PER BUNDLE	Sections	10.00			
	Sections	-			
	SqFt	1.50			
SOLDIER LNFT PER	Section	-			
SOLDIER LNF1 PER	Layer	17.72			
	Bundle	177.17			
	0.51	0.00			
	SqFt	3.00			
SAILOR LNFT PER	Section	-			
	Layer	35.43			
	Bundle	354.33			
	SqFt	4.58			
UNITS PER	Section	_			
	Bundle	540.00			
	Layer	327			
LBS PER	Section	-			
	Bundle	3,270			

COLORS	Reflectance	Stock
Charleston	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Heritage Brown	SR n/a SRI n/a	✓
River	SR .22 SRI 19	✓
Sierra	SR n/a SRI n/a	✓



CHARLESTON



DARK CHARCOAL



GRANITE



HERITAGE BROWN



RIVER



SIERRA

Single Unit



STANDARD 100 x 200 x 60mm 3 % x 7 % x 2 3/6" 540 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.





Mattoni RB_A



Mattoni HB_C



Mattoni DHB_D

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 4 mm Void - n/a

TECHNOLOGIES

$\textbf{ENDURACOLOR}^{\scriptscriptstyle{\top}}$

Refined surface and long-lasting color

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

Plant Produced MARENO			SMOOTH ENDURACOLOR
SQFT PER	Bundle Type		SINGLE
Bundle 89.		Plant Produced	MARENGO
Layer 11.		Thickness (mm)	70MM
Section Stone O.		Bundle	89.28
Section Stone O.		Layer	11.16
Layers 8. Sections Sections SOLDIER LNFT PER SqFt 1. Section Layer 14. Bundle 113. SqFt 5. Section Layer 56. Bundle 453. UNITS PER SqFt 6. Section Section 6.	SQFT PER	Section	-
Sections Sections SqFt 1. Section 14. Bundle 113. SqFt 5. Section 1. Layer 56. Bundle 453. UNITS PER Section		Stone	0.16
Sections SqFt	DED DUNDI E	Layers	8.00
Soldier LNFT PER Section 14. Bundle 113. SqFt 5. Section 56. Bundle 453. UNITS PER SqFt 6. Section 6.	PER BUNDLE	Sections	-
SOLDIER LNFT PER Layer 14. Bundle 113. SqFt 5. Section Layer 56. Bundle 453. UNITS PER Section		SqFt	1.27
Layer 14. Bundle 113. SqFt 5. Section 56. Bundle 453. UNITS PER Section	COLDIED I NET DED	Section	-
SqFt 5. Section Section Layer 56. Bundle 453. UNITS PER Section	SOLDIER LIFT PER	Layer	14.17
SAILOR LNFT PER Section Layer 56. Bundle 453. UNITS PER SqFt 6. Section Section		Bundle	113.39
SAILOR LNFT PER Layer 56. Bundle 453. SqFt 6. Section 6.		SqFt	5.08
Layer 56. Bundle 453. SqFt 6. Section	0411 00 1 1157 050	Section	-
UNITS PER Section 6.	SAILUR LNF1 PER	Layer	56.69
UNITS PER Section		Bundle	453.54
		SqFt	6.45
Bundle 576.	UNITS PER	Section	-
		Bundle	576.00
Layer 3		Layer	349
LBS PER Section	LBS PER	Section	-
Bundle 2,7		Bundle	2,793

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable	SR n/a SRI n/a	1



COCOA BROWN



DARK CHARCOAL



GRANITE FUSION



SABLE

Single Unit

STANDARD60 x 240 x 70mm
2 3/8 x 9 1/2 x 2 3/4"
576 Units/Bundle
.16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Slabs



APPLICATIONS

APPEARANCE Edge Detail - Zero

Riven

Void - n/a


BRUSHED FINISH		12" X 24"	18" X 24"	24" X 24"	24" X 36"
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22MM	22MM	22MM	22MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
SQFIPER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
	Bundle	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest (Riven)	SR n/a SRI n/a	✓	✓	✓	1
Golden Sand (Riven)	SR n/a SRI n/a	✓	✓	✓	1
Ivory Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓	1
Stone Cliff Grey (Riven)	SR n/a SRI n/a	1	✓	✓	1

LAYING PATTERNS



NaturalStone 12x24 RB A



NaturalStone 24x24 RB B



NaturalStone Multi-Unit C



Surface Texture - Brushed /

Joint Spacing - 0 mm

More information is available online.



AUTUMN HARVEST



GOLDEN SAND NEW



IVORY COAST NEW



STONE CLIFF GREY



12 X 24" 300 x 600 x 22mm 11 % x 23 % x %" 2.0 Sq.Ft./Stone



18 X 24" 450 x 600 x 22mm 17 ³/₄ x 23 ⁵/₈ x ⁷/₈" 3.0 Sq.Ft./Stone



24 X 24" 600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" 4.0 Sq.Ft./Stone



24 X 36" 600 x 900 x 22mm 23 1/8 x 35 1/2 x 7/8" 6.0 Sq.Ft./Stone

Notes: SOLD IN FULL CRATES ONLY. This product is not intended for vehicular applications. Unilock offers adjustable pedestals. ** Product is only available to dealers. ** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Units

Natural Stone - Sandstone Step, Coping and Pillar Cap



APPLICATIONS













APPEARANCE

Edge Detail - Zero Surface Texture - Brushed / Riven Joint Spacing - 0 mm Void - n/a

TECHNICAL INFORMATION

More information is available online.

	48 X 12" 4' FULLNOSE COPING	48 X 12" 4' ROCK FACED COPING	48 X 14" 4' ROCK FACED COPING
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	50MM	50MM	50MM

LINITS DED	Crate	20.00	20.00	20.00
UNITS PER	SqFt	-	-	-

LBS PER	Unit	106	106	132
LDS PER	Bundle	2,116	2,116	2,640

COLORS	Stock	Stock	Stock
Golden Sand	✓	✓	-
Ivory Coast	/	/	-
Stone Cliff Grey	1	1	✓

		48" X 16" STEP
	Bundle Type	SINGLE
	Thickness (mm)	150MM
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Bundle	2,526

COLORS	Stock
Indian Coast	✓







 ${\tt GOLDEN\,SAND\,\, {\color{red} NEW}}$

IVORY COAST NEW

STONE CLIFF GREY





48 X 16" STEP 1,200 x 150 x 400mm 47 1/4 x 5 1/8 x 15 3/4" Ivory Coast Only



4' FULLNOSE 48x12" 1,200 x 50 x 300mm 47 ¼ x 2 x 11 %"



4' ROCK FACE 48x12" 1,200 x 50 x 300mm 47 ½ x 2 x 11 %"



4' ROCK FACE 48x14" 1,200 x 50 x 350mm 47 1/4 x 2 x 13 %"

Natural Stone - Limestone Slabs



T	3)	1
		1 -
1		1

APPLICATIONS



APPEARANCE Edge Detail - Zero

Surface Texture - Riven Joint Spacing - 0 mm

Void - 0 %

LAYING PATTERNS

Pattern 12x24 RB A

TECHNICAL INFORMATION


More information is available online.

		12" X 24"	18" X 24"	24" X 24"	24" X 36"
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22MM	22MM	22MM	22MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
Units	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNIIS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LBS PER	Bundle	2,149	2,221	1,910	2,149
	·				

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	/	/	/



Pattern 24x24 RB B



Pattern Multi-Unit C



BLACK RIVER





12 X 24" 300 x 600 x 22mm $11\% \times 23\% \times \%$ 2.0 Sq.Ft./Stone



18 X 24" 450 x 600 x 22mm 17 ³/₄ x 23 ⁵/₈ x ⁷/₈" 3.0 Sq.Ft./Stone



24 X 24" 600 x 600 x 22mm 23 % x 23 % x %" 4.0 Sq.Ft./Stone



24 X 36" 600 x 900 x 22mm $23 \frac{5}{8} \times 35 \frac{1}{2} \times \frac{7}{8}$ " 6.0 Sq.Ft./Stone

Notes: SOLD IN FULL CRATES ONLY. Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contat your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. Important: Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. Product is not intended

Single Units

Natural Stone - Limestone Step, Coping and Pillar Cap

Black River





BLACK RIVER

APPLICATIONS













		48 X 12" ROCKFACED COPING	48 X 14" ROCK FACED COPING	24" ROCKFACED PILLAR CAP	28" ROCKFACED PILLAR CAP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50MM	50MM	64MM	64MM
UNITS PER	Crate	20.00	20.00	14.00	12.00
UNITS PER	SqFt	-	-	-	-
	· · · · · · · · · · · · · · · · · · ·	·			
LBS PER	Unit	106	128	186	200
LDS PER	Bundle	2,116	2,552	2,606	2,402
COLORS		Stock	Stock	Stock	Stock

		48" X 16" STEP
	Bundle Type	SINGLE
	Thickness (mm)	150MM
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Bundle	2,526

COLORS	Stock
Black River	✓



48 X 16" STEP 1,200 x 150 x 400mm 47 ½ x 5 % x 15 ³⁄₄"



Step

48"



24" PILLAR CAP 600 x 600 x 64mm 23 5% x 23 5% x 2 5%"

28" PILLAR CAP 710 x 710 x 64mm 28 x 28 x 2 5/8"

Coping



48 X 12" ROCK FACE 300 x 1,200 x 50mm 11 % x 47 1/4 x 2"

48 X 14" ROCK FACE 344 x 1,200 x 50mm 13 5/8" x 47 1/4" x 2"

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.

1

Natural Stone - Bucine Bluestone Slabs



		12" X 24"	18" X 24"	24" X 24"	24" X 36"
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		38MM	38MM	38MM	38MM
SQFT PER	Crate	168.00	168.00	176.00	168.00
SUFIPER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	84.00	56.00	44.00	28.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	42	63	84	126
LBS PER	Bundle	3,492	3,504	3,683	3,523

COLORS	Reflectance	Stock	Stock	Stock	Stock
Bluestone	SR n/a SRI n/a	1	1	1	

LAYING PATTERNS




Pattern 12x24 RB A

APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Flamed Joint Spacing - 0 mm Void - 0 %



TECHNICAL INFORMATION

More information is available online.






Bring a little bit of Florence and Tuscany to your project with Bucine Bluestone, exclusively from Unilock.

The material of choice for leading artists in the history of Italian art and Renaissance, this stone has been widely used for centuries.

Our Bucine Bluestone is a sandstone, sourced directly from Italy. A classic material of beautiful, uniform grey color, it is highly durable for outdoor use, extremely versatile, easy to maintain and combines well with many other colors and materials.

Pattern 24x24 RB B



Pattern Multi-Unit C



FLAMED SANDSTONE





12 X 24" 300 x 600 x 38mm 11 1/8 x 23 5/8 x 1 1/2" 2.0 Sq.Ft./Stone



18 X 24" 450 x 600 x 38mm $17\frac{3}{4} \times 23\frac{5}{8} \times 1\frac{1}{2}$ " 3.0 Sq.Ft./Stone



24 X 24" 600 x 600 x 38mm 23 % x 23 % x 11/2" 4.0 Sq.Ft./Stone



24 X 36" 600 x 900 x 38mm $23 \% \times 35 \% \times 1\%$ 6.0 Sq.Ft./Stone

Notes: SOLD IN FULL CRATES ONLY. Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contat your Territory Manager for pricing and availability. Unilock recommends a solvent-based sealer for natural stone. Important: Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. Product is not intended for vehicular applications.

Natural Stone - Bucine Bluestone Step, Coping & Pillar Cap



LINITS PER	26.00	14.00	4.00
SqFt	-	-	-

I DO DED	Unit	130	112	669
LDS PER	Bundle	3.382	1.562	2.676

COLORS	Reflectance	Stock	Stock	Stock
Bluestone	SR n/a SRI n/a	/	1	1

APPLICATIONS



Coping & Steps





48 X 24" ROCK-FACED STEP 1.219 x 356 x 150mm

1,219 x 356 x 150mm 48 x 14 x 5 7/8"



48 X 14" FLAMED EDGE

300 x 1,200 x 50mm 11 1/8 x 47 1/4 x 2"



24" PILLAR CAP FLAMED EDGE

610 x 610 x 50mm 24 x 24 x 2"







FLAMED SANDSTONE


Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contat your Territory Manager for pricing and availability. Unilock recommends a solvent-based sealer for natural stone. Important: Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. Product is not intended for vehicular applications.













NordicCobble_A



NordicCobble_Fan



NordicCobble_Circle

APPLICATIONS









APPEARANCE

Edge Detail -Surface Texture - Series Exposed Joint Spacing - mm Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SERIES EXPOSED TRAPEZOID
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	
	D dla	70.00
	Bundle	78.60
SQFT PER	Layer	9.83
	Section	-
	Stone	0.05
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	3.39
SOLDIER LNFT PER	Section	-
OOLDIEK ENITTEK	Layer	33.31
	Bundle	266.46
	SqFt	
	Section	-
SAILOR LNFT PER		-
	Layer	-
	Bundle	-
	SqFt	21.98
UNITS PER	Section	-
	Bundle	1,728.00
		200
	Layer	223
LBS PER	Section	-
	Bundle	1,786
001.000	D. f	

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Onyx Black	SR n/a SRI n/a	✓



COBALT GREY



ONYX BLACK



STANDARD 89.9 x 94 x 60mm 3 5/8 x 3 3/4 x 2 3/8" 864 units/Bundle .05 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Single Unit





	SMOOTH ENDURACOLOR	SERIES EXPOSED ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	80MM	80MM

COET DED	Bundle	77.33	77.33
	Layer	9.67	9.67
SQFT PER	Section	-	-
	Stone	0.54	0.54

PER BUNDLE	Layers	8.00	8.00
PER BUNDLE	Sections	-	-


	SqFt	1.59	-
SOLDIER LNFT PER	Section	-	-
SOLDIER LINFT PER	Layer	15.35	-
	Bundle	122.83	-

SAILOR LNFT PER	SqFt	1.59	-
	Section	-	-
	Layer	15.35	-
	Bundle	122.83	-

UNITS PER	SqFt	1.86	1.86
	Section	-	-
	Bundle	144.00	144.00

	Layer	350	350
LBS PER	Section	-	-
	Bundle	2,801	2,801

COLORS	Reflectance	Stock	Stock	
Custom Colors & Finishes		so	so	
Please contact your local Sales Representative for color options.				



Optiloc A



Optiloc B

APPLICATIONS









APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth & Series[™] Exposed Joint Spacing - 8 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.




CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean





STANDARD 260 x 260 x 80mm 10 ½ x 10 ½ x 3 ½" 144 units/Bundle .54 Sq.Ft./Stone


Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Porcelain




7		
	F	4
	44	
1	XX	

LAYING PATTERNS



Porcelain 24x24 RB_A



Porcelain 24x24 SB_B

APPLICATIONS





APPEARANCE

Edge Detail - n/a Surface Texture - Stone Finish Joint Spacing - n/a Void - n/a

TECHNICAL INFORMATION

More information is available online.

		DEL CONCA SQUARE PRESSED EDGE	CAESAR SQIARE SAWN EDGE	DEL CONCA COPING
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced			
	Thickness (mm)	20MM	20MM	30MM
	Pallet	248.00	232.50	-

SQFT PER	Box	7.75	7.75	-
	Unit	3.88	3.88	-
	Box	32.00	30.00	39.00

	Box	32.00	30.00	38.00
PER PALLET	SqFt	248.00	232.50	-
	Unit	64.00	60.00	38.00

UNITS PER	Pallet	64.00	60.00	38.00
UNITSPER	Box	2.00	2.00	1.00

	Unit	36	36	30
LBS PER	SqFt	9	9	-
	Вох	72	73	30
	Pallet	2,288	2,178	1,127

COLORS	Reflectance	Stock	Stock	
Gotham Grey	SR n/a SRI n/a	✓		1
Gotham Nero	SR n/a SRI n/a	✓		
Travstone Beige	SR n/a SRI n/a	✓		✓
Eikon Gea	SR n/a SRI n/a		y	
Eikon Titanio	SR n/a SRI n/a		1	







EIKON TITANIO



GOTHAM GREY



GOTHAM NERO



TRAVSTONE BEIGE



DEL CONCA SQUARE 600 x 600 x 20mm

23 % x 23 % x %" 3.88 Sq.Ft./Stone



CAESAR SQUARE 600 x 600 x 20mm 23 1/8 x 23 1/8 x 1/8" 3.88 Sq.Ft./Stone




DELCONCA COPING $330 \times 600 \times 30 mm$ 13 x 23 5/8 x 1 1/4"

Notes: SOLD IN FULL CRATES ONLY. Porcelalin tile is available for purchase by Unilock Authorized Dealers only. Immportant: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Porcelain



LAYING PATTERNS



Porcelain 16x32 RB_C



Porcelain 16x32 HB_D

APPLICATIONS





APPEARANCE

Edge Detail - n/a Surface Texture - Woodgrain Finish (DelConca) & Stone Finish Joint Spacing - n/a Void - n/a

TECHNICAL INFORMATION

More information is available online.

		DEL CONCA RECTANGLE PRESSED EDGE	UNILOCK RECTANGLE SAWN EDGE
Bundle Type		SINGLE	SINGLE
	Plant Produced		
	Thickness (mm)	20MM	20MM
	Pallet	248.00	232.50
SQFT PER	Box	7.75	7.75
	Unit	3.88	3.88
	Box	32.00	30.00
PER PALLET	SqFt	248.00	232.50
	Unit	64.00	60.00
UNITS PER	Pallet	64.00	60.00
OMITOT EX	Box	2.00	2.00
Γ			
	Unit	36	36
LBS PER	SqFt	9	9
LDOPER	Box	72	73
	Pallet	2,288	2,178

COLORS	Reflectance	Stock	Stock
Arbor Bianco	SR n/a SRI n/a	✓	
Arbor Grey	SR n/a SRI n/a	✓	
Arbor Natural	SR n/a SRI n/a	✓	
Cosmic Grey	SR n/a SRI n/a		✓
Dove Grey Travertine	SR n/a SRI n/a		/





Single Unit



ARBOR GREY



ARBOR NATURAL



COSMIC GREY



DOVE GREY TRAVERTINE



DEL CONCA RECTANGLE 400 x 800 x 20mm 15 34 x 31 ½ x 1/8" 3.45 Sq.Ft./Stone




UNILOCK RECTANGLE 400 x 800 x 20mm 15 ¾ x 31 ½ x 1/8" 3.44 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY.** Porcelalin tile is available for purchase by Unilock Authorized Dealers only. Imimportant: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Porcelain Random Bundle NEW



LAYING PATTERNS



Porcelain Fixed $Random_G$



Porcelain Fixed Random_H

APPLICATIONS



APPEARANCE

Edge Detail - n/a Surface Texture - Stone Finish Joint Spacing - n/a Void - n/a

TECHNICAL INFORMATION

More information is available online.

		DEL CONCA SQUARE PRESSED EDGE
	Bundle Type	RANDOM
	Plant Produced	
	Thickness (mm)	20MM
	Pallet	434.00
SQFT PER	Box	-
	Unit	-
	Box	
		-
PER PALLET	SqFt	-
	Unit	-
UNITS PER	Pallet	192
UNITO FER	Box	-
	Unit	
	SqFt	-
LBS PER	Box	-
	Pallet	4,005

COLORS	Reflectance	
Travstone Beige	SR n/a SRI n/a	✓



TRAVSTONE BEIGE

Random Bundle



12x12 300 x 300 x 20mm 11 % x 11 % x %" 64 units/62 Sq.Ft. 1 of 2



12x24 300 x 600 x 20mm $11\,\%$ x $23\,\%$ x %64 units/124 Sq.Ft. 2 of 2



24x24 600 x 600 x 20mm $23 \frac{5}{8} \times 23 \frac{5}{8} \times \frac{7}{8}$ " 64 units/248 Sq.Ft. 1 of 1

Notes: SOLD IN FULL CRATES ONLY. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular

Promenade™ Plank Paver 70mm & 150mm



6X24 UMBRIANO MOTTLED SINGLE MARENGO 150MM

> 46.50 11.63

> > 0.97



		6X24 SMOOTH	6X24 SERIES EXPOSED
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MARENGO	CHICAGO
	Thickness (mm)	70MM	70MM
	Bundle	93.00	93.00
COLT DED	Layer	11.63	11.63
SQFT PER	Section	-	-
	Stone	0.97	0.97

DED DUNDI E	Layers	8.00	8.00	4.00
PER BUNDLE	Sections	-	-	-

		SqFt	0.51	0.51	0.51
	SOLDIER LNFT PER	Section	-	-	-
		Layer	5.91	5.91	5.91
		Bundle	47.24	47.24	23.62

SAILOR LNFT PER	SqFt	2.03	2.03	2.03
	Section	-	-	-
	Layer	23.62	23.62	23.62
	Bundle	188.98	188.98	94.49

	SqFt	1.03	1.03	1.03
UNITS PER	Section	-	-	-
	Bundle	96.00	96.00	48.00
		•		•

	Layer	372	372	798
LBS PER	Section	-	-	-
	Bundle	2,978	2,978	3,192

COLORS	Reflectance	Stock	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	1	✓	/

LAYING PATTERNS



Promenade Multi-Unit Random G

APPLICATIONS







APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth, Series[™] Exposed & Umbriano Mottled Joint Spacing - 4 mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.



CLASSIC Thrumix Finish



SERIES™ **Exposed Granite Finish**



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ColorFusion and EasyClean





6" X 24" SMOOTH 150 x 600 x 70mm 5 % x 23 5/8 x 2 3/4" 96 units/Bundle

.97 Sq.Ft./Stone



6" X 24" SERIES 150 x 600 x 70mm 5 % x 23 5/8 x 2 3/4" 96 units/Bundle .97 Sq.Ft./Stone



6" X 24" UMBRIANO 150 x 600 x 150mm 5 % x 23 5/8 x 2 3/4" 48 units/Bundle .97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.






		SMOOTH 3 X 12	SMOOTH 4 X 12	SMOOTH 4 X 16	SMOOTH 8 X 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	MARENGO	CHICAGO
	Thickness (mm)	100MM	100MM	100MM	100MM
	Bundle	63.94	58.13	51.67	51.67
COET DED	Layer	10.66	11.63	10.33	10.33
SQFT PER	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
	Layers	6.00	5.00	5.00	5.00
PER BUNDLE	Sections	_	_	_	_



Promenade 4x12



Promenade 4x16 HB_C



Promenade Multi-Unit Random G

APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth & Series[™] Exposed Joint Spacing - 4 mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

PER BUNDLE	,				
PER BUNDLE	Sections	-	-	-	-
	SqFt	1.35	1.02	0.76	0.51
SOLDIER LNFT PER	Section	-	-	-	-
SOLDIER LINFT PER	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	59.06	39.37	26.25
	SqFt	4.06	3.05	3.05	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	177.17	157.48	78.74
	SqFt	4.13	3.10	2.32	0.77
UNITS PER	Section	-	-	-	-
	Bundle	264.00	180.00	120.00	40.00
	Layer	465	532	469	483
LBS PER	Section	-	-	-	-

flectance	Stock	Stock	Stock	Stock
n/a SRI n/a	so	so	so	so
	n/a SRI n/a	n/a SRI n/a SO	n/a SRI n/a SO SO	n/a SRI n/a SO SO SO

2,789

2,659

2,345

2,414

Please contact your local Sales Representative for color options.



CLASSIC Thrumix Finish



IL CAMPO® **Brushed Finish**



SFRIFS™ **Exposed Granite Finish**



Bundle

SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



3" X 12" 75 x 300 x 100mm 3 x 11 1/8 x 3 1/8" 264 units/Bundle .24 Sq.Ft./Stone



4" X 12" 100 x 300 x 100mm 3 % x 11 % x 3 %" 180 units/Bundle .32 Sq.Ft./Stone



4" X 16" 100 x 400 x 100mm 3 % x 15 ¾ x 3 %" 120 units/Bundle .43 Sq.Ft./Stone



8" X 24" 200 x 600 x 100mm 7 % x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





LAY	NG	ΡΔΤΊ	[FRI	20
LAII	110	- MI	-1/1	v



Richcliff Fixed Random A



Richcliff Fixed Random B



Richcliff LargeRec HB_H

APPLICATIONS









APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

RF∆I ∆"

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place contrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		LARGE RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60MM	60MM

	Bundle	90.30	82.39
SOUT DED	Layer	11.29	10.30
SQFT PER	Section	-	-
	Stone	0.56	1.72

PER BUNDLE	Layers	8.00	8.00	
PER BUNDLE	Sections	-	-	

	SqFt	-	0.58
SOLDIER LNFT PER	Section	-	-
SOLDIER LINFT PER	Layer	-	5.94
	Bundle	-	47.56

	SqFt	1.31	1.01
SAILOR LNFT PER	Section	-	-
SAILUR LINFT PER	Layer	14.78	10.39
Bundle	118.22	83.15	

	SqFt	1.77	0.58
UNITS PER	Section	-	-
	Bundle	160.00	48.00

	Layer	309	301	
LBS PER	Section	-	-	
	Bundle	2,472	2,411	

	COLORS	Reflectance	Stock	Stock
	Dawn Mist	SR n/a SRI n/a	/	/
ĺ	Pebble Taupe	SR n/a SRI n/a	/	/
ĺ	Smoke Shale	SR n/a SRI n/a	/	1








PEBBLE TAUPE



SMOKE SHALE





RECTANGLE226 x 300 x 60mm
8 % x 11 % x 2 3 % "
64 Units/Bundle
.75 SqFt/Stone



SQUARE226 x 226 x 60mm
8% x 8% x 2 3/8"
32 units/Bundle
.58 Sq.Ft./Stone



SMALL RECTANGLE 150 x 226 x 60mm 5% x 8 % x 2 % " 64 units/Bundle .38 Sq.Ft./Stone




LARGE RECTANGLE 302 x 528 x 60mm 11% x 20 % x 2 % " 48 units/Bundle 1.72 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







Series Fixed Random A



Series Fixed Random B



Series Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Series Exposed Joint Spacing - 7mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SERIES EXPOSED
	Bundle Type	RANDOM
	Plant Produced	CHICAGO
	Thickness (mm)	60MM
	Bundle	104.60
	Layer	10.46
SQFT PER	Section	10.40
	Stone	1.31
	Storie	1.31
PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	0-54	
	SqFt	-
SOLDIER LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	0.85
	Section	-
SAILOR LNFT PER	Layer	8.86
	Bundle	88.58
	0.51	2.70
	SqFt	0.76
UNITS PER	Section	-
	Bundle	80.00
	Layer	296
LBS PER	Section	-
	Bundle	2,960

COLORS	Reflectance	Stock
Autumn Granite	SR n/a SRI n/a	✓
Cobalt Grey	SR n/a SRI n/a	✓



AUTUMN GRANITE



COBALT GREY



LAR 360: 14 1/4 20 u

LARGE RECTANGLE 360 x 540 x 60mm 14 ¼ x 21 ¼ x 2 3/8" 20 units/Bundle 2.09 Sq.Ft./Stone



SQUARE 360 x 360 x 60mm 14 ¼ x 14 ¼ x 2 ¾8" 30 units/Bundle 1.40 Sq.Ft./Stone




SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 ½ x 2 ¾" 30 units/Bundle

.70 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular use. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. Il measurements are nominal. Contact Unilock for more information.





Series 4x8_HB_F



Series 4x8_HB_G

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Series Exposed Joint Spacing - 7mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SERIES EXPOSED
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	70MM
	Bundle	106.20
		11.80
SQFT PER	Layer	
	Section	17.70
	Stone	0.22
	Layers	9.00
PER BUNDLE	Sections	6.00
	SqFt	1.50
SOLDIER LNFT PER	Section	26.57
	Layer	17.72
	Bundle	159.45
	0.51	0.00
	SqFt	3.00
SAILOR LNFT PER	Section	53.15
	Layer	35.43
	Bundle	318.90
	CaEt	4.58
LINUTA DED	SqFt	
UNITS PER	Section	81.00
	Bundle	486.00
	Layer	383
LBS PER	Section	574
	Bundle	3,445
		·

COLORS	Reflectance	Stock
Golden Tan	SR .40 SRI 45	✓
Onyx Black	SR n/a SRI n/a	✓







ONYX BLACK

Single Unit



4 X 8 100 x 200 x 70mm 3 % x 7 % x 2 ¾" 4.86 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. Il measurements are nominal. Contact Unilock for more information.







Series 4x12_RB_L



Series4x12_HB_M



Series 4x12_DHB_N

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Series Exposed Joint Spacing - 7mm Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SERIES EXPOSED
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	80MM
	Bundle	93.04
	Layer	11.63
SQFT PER	Section	11.03
	Stone	0.32
	Storie	0.32
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	·	
	SqFt	1.02
SOLDIER LNFT PER	Section	-
	Layer	11.81
	Bundle	94.49
	SqFt	3.05
	Section	3.00
SAILOR LNFT PER		35.43
	Layer	
	Bundle	283.46
	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00
	Layer	426
LBS PER	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	✓



ARCTIC GREY



NORDIC STAR





100 x300 x 80mm $3\% \times 11\% \times 3\%$ 288 units/Bundle .32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. Il measurements are nominal. Contact Unilock for more information.







Skyline 24x24_SB_A



Skyline 24x24_RB_B

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 2mm Void - n/a

TECHNOLOGIES

$\textbf{ENDURACOLOR}^{\scriptscriptstyle{\mathsf{TM}}}$

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits see page 17.

		24 X 24
	Bundle Type	SINGLE
	Plant Produced	MARENGO
	Thickness (mm)	50MM
	Bundle	80.00
		8.00
SQFT PER	Layer	0.00
	Section	-
	Stone	4.00
	Layers	10.00
PER BUNDLE	Sections	-
	0.5	0.50
	SqFt	0.50
SOLDIER LNFT PER	Section	-
	Layer	4.00
	Bundle	40.00
	SqFt	0.50
	Section	0.00
SAILOR LNFT PER		4.00
	Layer	
	Bundle	40.00
	SqFt	0.25
UNITS PER	Section	-
	Bundle	20.00
	T .	
	Layer	183
LBS PER	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	.41 n/a 46 n/a	✓
Medium Grey	SR n/a SRI n/a	✓





CHAMOIS

MEDIUM GREY



24 x 24 606 x 606 x 50mm 23 % x 23 % x 2" 20 units/Bundle 4.00 Sq.Ft./Stone

Pedestal System Contact your local Unilock Rep for more information.



Notes: **SOLD In FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended for vehicular applications**. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.







Soreno 16x32 RB_A

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - X mm Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

SOFT TOUCH

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits see page 17.

		16 X 32
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	50MM
	Bundle	64.27
SQFT PER	Layer	3.57
	Section	-
	Stone	3.57
	I	T .
PER BUNDLE	Layers	18.00
	Sections	-
	SqFt	0.37
	Section	0.37
SOLDIER LNFT PER		-
	Layer	1.34
	Bundle	24.04
	SqFt	0.75
	Section	0.10
SAILOR LNFT PER		2.67
	Layer	
	Bundle	48.13
	SqFt	0.28
UNITS PER	Section	-
	Bundle	18.00
		10.00
	Layer	85
LBS PER	Section	-
	Bundle	1,536

COLORS	Reflectance	Stock
Light Granite	SR n/a SRI n/a	/
Toscana Beige	SR n/a SRI n/a	/

Weight has been estimated - product has not yet been produced. Please confirm weight upon ordering.



LIGHT GRANITE



TOSCANA BEIGE



16 X 32 407 x 815 x 50mm $16 \times 32 \times 2$ " 18 units/Bundle 3.57 Sq.Ft./Stone

Pedestal System Contact your local Unilock Rep for more information.



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.









TownHall 4x10 DHB_B



TownHall 4x10 HB_B



TownHall 4x10 RB_C

APPLICATIONS







APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm Void - 6.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

RFAI A™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place contrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	70MM
		00.44
	Bundle	88.41
SQFT PER	Layer	11.05
	Section	-
	Stone	0.28
	Layers	8.00
PER BUNDLE	Sections	0.00
	Sections	-
	SqFt	1.19
	Section	-
SOLDIER LNFT PER	Layer	13.12
	Bundle	104.99
	SqFt	2.97
SAILOR LNFT PER	Section	-
O/IIZOIC ZIII I I ZIC	Layer	32.81
	Bundle	262.47
	SqFt	3.62
UNITS PER	Section	3.02
UNITS PER	Bundle	220.00
	Duildle	320.00
LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

BURGUNDY RED/BURNT CLAY/OLD OAK 3-Color Blend is sold separately and blended on-site.





STANDARD

250 x 100 x 70mm 9 % x 3 % x 2 ¾" 320 units/Bundle .28 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.










Treo Fixed Random_R



 $Treo\ Fixed\ Random_S$

APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7mm Void - 5.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SMOOTH
	Bundle Type	RANDOM
	Plant Produced	CHICAGO
	Thickness (mm)	60MM
	Bundle	108.99
SQFT PER	Layer	10.90
	Section	-
	Stone	0.52
DED DUNDI E	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	-
SOLDIER LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	1.35
	Section	
SAILOR LNFT PER	Layer	14.76
	Bundle	147.64
	SqFt	1.93
UNITS PER	Section	-
	Bundle	210.00
LBS PER	Lover	304
	Layer	304
	Section	-
	Bundle	3,035

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	1



GRANITE



RIVER



SIERRA



TUSCANY NEW





LARGE RECTANGLE 225 x 337.5 x 60mm 8 % x 13 % x 2 % " 60 units/Bundle .82 Sq.Ft./Stone



SQUARE225 x 225 x 60mm
8 % x 8 % x 2 3/8"
60 units/Bundle
.55 Sq.Ft./Stone



SMALL RECTANGLE 112.5 x 225 x 60mm 4 ½ x 8 % x 2 3%" 80 units/Bundle .27 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. Il measurements are nominal. Contact Unilock for more information.







LAYING PATTERNS



TribecaCobble Fixed Random_A

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Series Exposed Textured Joint Spacing - 10mm Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SERIES EXPOSED TEXTURED
	Bundle Type	RANDOM
	Plant Produced	CHICAGO
	Thickness (mm)	70MM
	Bundle	97.53
SQFT PER	Layer	12.19
	Section	-
	Stone	0.32
DED DUNDI E	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	-
SOLDIER LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	2.34
	Section	2.34
SAILOR LNFT PER		
	Layer	28.49
	Bundle	227.95
	SqFt	3.12
UNITS PER	Section	-
	Bundle	304.00
	Laura	070
	Layer	378
LBS PER	Section	-
	Bundle	3,022

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓



COBALT GREY



PEPPERED GRANITE





LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone



RECTANGLE130 x 230 x 70mm
5 x 9 x 2 ¾"
88 units/Bundle
.32 Sq.Ft./Stone




SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 % x 2 ¾" 128 units/Bundle .25 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 114 and Important Notice on page 116. All measurements are nominal. Contact Unilock for more information.





LAYING PATTERNS



Turfstone A

APPLICATIONS







APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm Void - 40%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	80MM
	Bundle	80.00
	Layer	10.00
SQFT PER	Section	-
	Stone	2.50
PER BUNDLE	Layers	8.00
	Sections	-
	SqFt	-
	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Section	
SAILOR LNFT PER		-
	Layer	-
	Bundle	-
	SqFt	0.40
UNITS PER	Section	-
	Bundle	32.00
	Layer	249
LBS PER	Section	
	Bundle	1,995
	1	1,555
COLORS	Reflectance	Stock

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO



NATURAL

Single Unit



LARGE RECTANGLE 400 x 600 x 80mm 15 34 x 23 5/8 x 3 1/8"

32 units/Bundle 2.50 Sq.Ft./Stone

Notes: Special Order - lead time is required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



5.83

0.32

3.74

37.40

0.53

6 23

62.30

0.17

0.22

1.50

17.72

159.45

3.00

35.43

318.90

4.58



		UMBRIANO	UMBRIANO XL	UMBRIANO 4X8
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO	MARENGO
	Thickness (mm)	60MM	60MM	60MM
	Bundle	116.57	116.57	106.20
SQFT PER	Layer	11.66	11.66	11.80
SUFIFER	Section	-	-	-

1.46

0.80

9.35

93.50

0.69

LAYING PATTERNS	APPLICATIONS	PER BUNDLE	Layers	10.00	10.00	9.00
	40	PER BUNDLE	Sections	-	-	_

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

Summer Wheat

Winter Marvel

Stone

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

APPEARANCE Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 7mm Umbriano Fixed

Void - n/a

TECHNOLOGIES

Random_A

Umbriano Fixed

Random_B

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	Bundle	80.00	20.00	486.00
	Layer	320	320	322
LBS PER	Section	-	-	-
	Bundle	3,199	3,199	2,900
		T		
COLORS	Reflectance	Stock	Stock	
French Grey	SR .18 SRI 17	1	1	-
Midnight Sky	SR n/a SRI n/a	1		/

Umbriano Multi-Unit

Random_I

FRENCH GREY XL ALSO AVAILABLE



MIDNIGHT SKY



SUMMER WHEAT XL ALSO AVAILABLE



SR .42 SRI 48

SR .35 SRI 38

WINTER MARVEL



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8"

20 units/Bundle 2.331 Sq.Ft./Stone

SQUARE

380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.554 Sq.Ft./Stone **SMALL RECTANGLE** 190 x 380 x 60mm 7 ½ x 15 x 2 3/8"

30 units/Bundle .77 Sq.Ft./Stone



570 x 950 x 60mm 22 1/2 x 37 1/2 x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone



Only available in Midnight Sky


4x8

100 x 200 x 60mm 4 x 8 x 2 3/8" 30 units/Bundle .77 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 80mm **@**





LAYING PATTERNS



Umbriano 4x12 HB_1



Umbriano 4x12 RB_H

APPLICATIONS





APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 7mm Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™


Factory sealed to provide integral surface protection from stains

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

	4 X 12
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	80MM

	Bundle	93.04
SQFT PER	Layer	11.63
SUFIFER	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00	
	PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
SOLDIER LINFT PER	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00

	Layer	426
LBS PER	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR n/a SRI n/a	✓
Winter Marvel	SR .35 SRI 38	✓





4 X 12

100 x 300 x 80mm $3\% \times 11\% \times 3\%$ 288 units/Bundle .32 Sq.Ft./Stone




7			X
	\/X		1
	1	1	2

LAYING PATTERNS



Westport Fixed Random_A



Westport Fixed $Random_B$

APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3-7mm Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.

	WESTPORT	5X10 WESTPORT
Bundle Type	RANDOM	SINGLE
Plant Produced	WISCONSIN	WISCONSIN
Thickness (mm)	70MM	70MM

	Bundle	94.19	94.19
SQFT PER	Layer	11.77	11.77
SQFIPER	Section	-	-
	Stone	0.59	0.34

DED DUNDI E	Layers	8.00	8.00
PER BUNDLE	Sections	-	-

		SqFt	-	0.71
SOLDIER LNFT PER	Section	-	-	
	SOLDIER LINFT PER	Layer	-	8.33
		Bundle	-	66.67

		SqFt	1.24	1.42
SAILOR LNFT PER	Section	-	-	
	Layer	14.57	16.67	
	Bundle	116.56	133.33	

	SqFt	1.70	2.97
UNITS PER	Section	-	-
	Bundle	160.00	280.00

	Layer	3/2	361
LBS PER	Section	-	-
	Bundle	2,976	2,884

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	/	-
River	SR n/a SRI n/a	/	-
Sierra	SR n/a SRI n/a	/	-



CHARCOAL NEW (5 X 10 only)



GRANITE



RIVER



SIERRA

Random Bundle



LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 3/4" 32 units/Bundle 1.01 Sq.Ft./Stone



SQUARE 254 x 254 x 70mm 10 x 10 x 2 ¾" 56 units/Bundle .67 Sq.Ft./Stone



RECTANGLE 127x 254 x 70mm $5 \times 10 \times 2 \frac{3}{4}$ " 72 units/Bundle .34 Sq.Ft./Stone





5X10 RECTANGLE 127x 254 x 70mm $5\times10\times2\,\ensuremath{\ensuremath{\,\%}}\xspace^{-1}$ 280 units/Bundle .34 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. All measurements are nominal. Contact Unilock for more information.

STANDARD CLASSIC ANTIQUED

SINGLE

100MM

32.00

5.33

0.33

6.00

4.00

96.00

1.00

3.00

24.00

96.00

491

736

2,944

Stock

1

/

/

MULTI-PLANT

TAPERED

SINGLE

100MM

36.00

6.00

0.25

6.00

108.00

0.75

4.00

144.00

466

2,793

Stock

1

1

MULTI-PLANT

CLASSIC ANTIQUED

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

Sections

Bundle

Unit

SqFt

Section

Bundle

Layer

Section

Bundle

SR.n/a SRI n/a

FCFT PER

PER BUNDLE

LNFT PER

UNITS PER

LBS PER

COLORS

Granite

Limestone

Sandstone

Sierra

Coffee Creek



APPLICATIONS





CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Standard Joint Spacing - 2mm Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

- see page 17.

SUNSET FIREPIT KITS

Available with or without grill in the following colors:

- · Coffee Creek (Only available in Round Units)
- · Granite (Only available in Round Units)
- Sandstone
- · Sierra



ROUND



SQUARE



COFFEE CREEK Tapered unit only



GRANITE Tapered unit only



LIMESTONE Standard unit only



SANDSTONE



SIERRA



SMALL TAPERED 229 x 100 x 200mm 9 x 3 1/8 x 7 1/8" 144 units/Bundle .25 Fc.Ft./Stone



STANDARD 300 x 100 x 200mm 11 1/2 x 3 1/2 x 7 1/2" 96 units/Bundle .33 Fc.Ft./Stone

Notes: SMALL TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY. Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone™, Brussels Block® XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

Dura Hold° CLASSIC



APPLICATIONS













CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - Zero Surface Texture - Brushed

TECHNOLOGIES

$\textbf{CLASSIC}^{\text{\tiny{TM}}}$

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.



NATURAL

		TIE-BACK	1/2 COPING	CORNER 45°
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300MM	300MM	300MM
	Bundle	2.00	3.00	7.04
FCFT PER	Layer	2.00	3.00	7.04
	Stone	2.00	3.00	7.04
	Layers	1.00	1.00	1.00
PER BUNDLE	Sections	-	-	
	Bundle	-	3.00	-
LNFT PER	Unit	-	3.00	
	SqFt	0.50	0.33	0.14
UNITS PER	Section	-	-	-
	Bundle	1.00	1.00	
LBS PER	Layer	1,660	800	1,480
	Section	-	-	
	Bundle	1,660	800	1,480

COLORS		Stock	Stock	Stock
Natural	SR.n/a SRI n/a	SO	SO	SO



TIE-BACK1830 x 300 x 600mm
72 x 12 x 24"
1 unit/Bundle
2.00 Fc.Ft./Stone



1/2 COPING 915 x 300 x 600mm 36 x 12 x 24" 1 unit/Bundle 3.00 Fc.Ft./Stone



CORNER 45°1520 x 300 x 600mm
60 x 12 x 24"
1 unit/Bundle
7.04 Fc.Ft./Stone

Notes: "Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone" Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		TAPERED SPLIT CLASSIC ANTIQUED	CORNER SPLIT CLASSIC ANTIQUED	COPING TAPERED CLASSIC ANTIQUED
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150MM	150MM	75MM
FCFT PER	Bundle	31.25	20.83	18.74
	Layer	6.25	4.17	2.34
	Stone	0.52	0.52	0.26
			ı	
PER BUNDLE	Layers	5.00	5.00	8.00
I EN BONDEE	Sections	4.00	4.00	3.00
		00.00	44.00	
LNFT PER	Bundle	62.30	41.60	-
	Unit	1.04	1.04	-
	SqFt	1.92	1.92	3.84
UNITS PER	Section	15.00	10.00	24.00
UNITS PER				
	Bundle	60.00	40.00	72.00
	Layer	608	453	299
LBS PER	Section	760	566	797
	Bundle	3,040	2,264	2,392

COLORS		Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓









Single Units

GRANITE

RIVER

SANDSTONE

SIERRA





LARGE TAPERED 380 x 150 x 230mm 15 x 5 % x 9" 20 units/Bundle .63 Fc.Ft./Stone



MEDIUM TAPERED 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 20 units/Bundle .52 Fc.Ft./Stone



SMALL TAPERED 250 x 150 x 230mm 9 % x 5 % x 9" 20 units/Bundle .42 Fc.Ft./Stone



CORNER SPLIT 320 x 150 x 230mm 12 5% x 5 % x 9" 40 units/Bundle .52 Sq.Ft./Stone



CLASSIC

COPING TAPERED 320 x 75 x 300mm 12 % x3 x 11 % 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. Quarry tubing is only added to orders if requested. Ledgestone[™], Olde Quarry[™] coping, Brussels Block[®] XL, Brussels Fullnose[™] or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

CLASSIC



APPLICATIONS





CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Standard Joint Spacing - n/a Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		RANDOM CLASSIC	PILLAR
Bundle Type		RANDOM	SINGLE
Plant Produced		CHICAGO	CHICAGO
Thickness (mm)		100MM	100MM
	Bundle	31.91	29.97
FCFT PER	Layer	10.64	9.99
FOFTPER	Stone	0.51	0.33
	Otorio	0.01	0.00
PER BUNDLE	Layers	3.00	3.00
	Sections	-	3.00
	Bundle	94.46	_
LNFT PER	Unit	1.50	-
	SqFt	1.97	3.00
UNITS PER	Section	-	30.00
	Bundle	63.00	90.00
	Layer	948	890
LBS PER	Section	-	890
	Bundle	2,845	2,670
		_,0.0	_,0.0

SR.n/a SRI n/a

SR.n/a SRI n/a

SR.n/a SRI n/a

SR.n/a SRI n/a







COLORS

Granite

Graphite

River

Sierra





Stock

1

1

1

PILLAR 300 x 100 x 200mm $11\,\%\,x\,3\,\%\,x\,7\,\%$ 90 units/Bundle .33 Fc.Ft./Stone

GRANITE

GRAPHITE NEW

ARGE RECTANGLE

500 x 100 x 200mm

19 ¾ x 3 ½ x 7 ½

15 units/Bundle

.33 Fc.Ft./Stone

RIVER

RECTANGLE 400 x 100 x 200mm $15\ {}^{3}\!\!\!/_{4}\ x\ 3\ {}^{7}\!\!\!/_{8}\ x\ 7\ {}^{7}\!\!\!/_{8}$ 15 units/Bundle

.55 Fc.Ft./Stone



SIERRA

SMALL RECTANGLE 300 x 100 x 200mm $11\% \times 3\% \times 7\%$ 15 units/Bundle .44 Fc.Ft./Stone



XL RECTANGLE 600 x 100 x 200mm $23\,\%\,x\,3\,\%\,x\,7\,\%$ 18 units/Bundle .33 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. Ledgestone¹¹, Unilook Natural Stone or 6" x 12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Random Bundle















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		RANDOM TAPERED CLASSIC ANTIQUED	CORNER CLASSIC ANTIQUED	COPING TAPERED CLASSIC
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	WISCONSIN	CHICAGO	CHICAGO
	Thickness (mm)	114MM	114MM	75MM
	T			
FCFT PER	Bundle	33.75	30.89	24.00
	Layer	5.63	6.18	3.00
	Stone	0.38	0.39	0.25
PER BUNDLE	Layers	6.00	5.00	8.00
FER BONDEL	Sections	5.00	4.00	4.00
	Bundle	90.00	82.40	96.00
LNFT PER	Unit	1.00	1.03	1.00
	SqFt	2.67	2.59	4.00
UNITS PER	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00
				-
	Layer	521	630	380
LBS PER	Section	625	788	760
	Bundle	3,125	3,150	3,039

COLORS		Stock	Stock	Stock
Coffee Creek	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	1	✓	✓









Single Units



COFFEE CREEK

GRANITE

RIVER

SANDSTONE

SIERRA





305 x 114 x 230mm 12 x 4 ½ x 9" 30 units/Bundle .63 Fc.Ft./Stone



15"380 x 114 x 230mm
15 x 4 ½ x 9"
30 units/Bundle
.52 Fc.Ft./Stone



9" 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .42 Fc.Ft./Stone



CORNER
300 x 114 x 230mm
11 % x 4 ½ x 9"
80 units/Bundle
.39 Fc.Ft./Stone



COPING TAPERED 305 x 75 x 305mm 12 x 3 x 12 96 units/Bundle .25 Fc.Ft./Stone * 32 Corner Units/Bundle

Notes: Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Quarry tubing is only added to orders if requested. Ledgestone[™], Olde Quarry[™] Coping, Brussels Block XL, Brussels Fullnose or or "x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

2.00



		CORNER DOUBLE SPLIT CLASSIC	XL TAPERED SPLIT CLASSIC	COPING CLASSIC
	Bundle Type	DOUBLE	SINGLE	DOUBLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150MM	150MM	75MM
	Bundle	30.01	21.33	20.34
FCFT PER	Layer	10.00	5.33	2.91

FUFIFER	Layei	10.00	5.55	2.91
	Stone	1.67	0.67	0.48
	Layers	3.00	4.00	7.00

LNFT PER	Bundle	-	42.67	82.95
	Unit	-	1.33	1.97

6.00

	SqFt	0.60	1.50	2.06
UNITS PER	Section	3.00	-	21.00
	Bundle	18.00	32.00	42.00

LBS PER	Layer	547	629	411
	Section	274	-	1,437
	Bundle	1,641	2,514	2,875

COLORS		Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
Nevada	SR.n/a SRI n/a	✓	/	✓
Sierra	SR.n/a SRI n/a	✓	/	/

APPLICATIONS





CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Split & Standard (coping) Joint Spacing - n/a Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.







PER BUNDLE

Sections

GRANITE

NEVADA

SIERRA

Single Unis



CORNER 200 x 150 x 300mm $7\% \times 5\% \times 11\%$ " 18 units/Bundle 1.67 Fc.Ft./Stone

* 32 Corner Units/Bundle

COPING 300 x 75 x 300mm 11 % x 3 x 11 %" 42 units/Bundle .48 Fc.Ft./Stone



XL UNIT 400 x 150 x 300mm 15 34x 5 % x 11 %" 32 units/Bundle .67 Fc.Ft./Stone

Notes: XL WALL UNITS ARE SINGLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY and are produced and sold on a required, refundable skid. Corner Units are produced and sold on a required, refundable skid. 12" Coping bundle has 16 units of closed-end coping (8 left and 8 right). Closed-end 12" coping not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa2 wall is %" every course or 11%" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.







CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth Joint Spacing - n/a Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		STANDARD SMOOTH	COPING SMOOTH
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	180MM	180MM
	Bundle	23.25	23.25
FCFT PER	Layer	7.75	7.75
	Stone	1.94	1.94
	Layers	3.00	3.00
PER BUNDLE	Sections	-	-
	Bundle	39.37	39.37
LNFT PER	Unit	3.28	3.28
	SqFt	0.52	0.52
UNITS PER	Section	-	-
	Bundle	12.00	12.00
	Lavor	1,029	1,029
LBS PER	Layer	1,029	1,029
LDJ FER	Bundle	3,086	3,086
COLORS		Stock	Stock

SR.n/a SRI n/a

SR.n/a SRI n/a

SO





GRANITE

SIERRA

Single Unis





Granite

Sierra

COPING 1000 x 180 x 290mm 39 3/8 x 7 x 11 1/2" 12 units/Bundle .33 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



		CORNER 90 SPLIT	CORNER 45 SPLIT	STANDARD SPLIT	STANDARD 925 SPLIT	COPING SPLIT
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	185MM	185MM	185MM	185MM	185MM
FOFT	Bundle	17.19	13.50	12.00	6.00	12.00

	Bundle	17.19	13.50	12.00	6.00	12.00
FCFT PER	Layer	5.73	4.50	4.00	2.00	4.00
	Stone	2.87	2.25	2.00	2.00	2.00

PER	Layers	3.00	3.00	3.00	3.00	3.00
BUNDLE	Sections	-	-	-	-	6.00

LNFT	Bundle	-	-	19.50	9.75	-
PER	Unit	-	-	3.25	3.25	-

	SqFt	0.35	0.44	0.50	0.50	0.50
UNITS PER	Section	-	-	-	-	1.00
	Bundle	6.00	6.00	6.00	3.00	6.00

	Layer	954	790	926	872	919
LBS PER	Section	-	-	-	-	459
	Bundle	2,862	2,370	2,778	2,617	2,756

COLORS		Stock	Stock	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	SO	SO	SO	SO	✓
Nevada	SR.n/a SRI n/a	SO	SO	SO	SO	1
Sierra	SR.n/a SRI n/a	so	so	so	so	✓













APPEARANCE

Edge Detail - n/a Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES

$\textbf{CLASSIC}^{\text{\tiny{TM}}}$

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

- see page 17.







GRANITE

NEVADA

SIERRA





CORNER SPLIT 90° 925 x 185 x 500mm 36 ½ x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone



CORNER SPLIT 45° 925 x 185 x 500mm 36 ½ x 7 ¾ x 19 ¾" 6 units/Bundle 2.25 Fc.Ft./Stone



STANDARD SPLIT 1000 x 185 x 500mm 39 3/6 x 7 3/6 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone



STANDARD 925 SPLIT 1000 x 185 x 925mm 39 3/8 x 7 3/8 x 36 1/2" 3 units/Bundle 2.00 Fc.Ft./Stone



COPING SPLIT 1000 x 185 x 500mm 39 3/6 x 7 3/6 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone

Notes: Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.





APPEARANCE

Edge Detail - n/a Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES

$\textbf{CLASSIC}^{\scriptscriptstyle{\mathsf{TM}}}$

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		157
		77





TAN

	SIENASTONE 48" SMOOTH STEP
Bundle Type	SINGLE
Plant Produced	GORMLEY
Thickness (mm)	500MM

	Bundle	13.95
FCFT PER	Layer	4.65
	Stone	2.33

PER BUNDLE	Layers	3.00
PER BUNDLE	Sections	-

I NFT PFR	Bundle	24.00
LNFIPER	Unit	4.00

	SqFt	0.43
UNITS PER	Section	-
	Bundle	6.00

	Layer	1,081
LBS PER	Section	-
	Bundle	3,242

COLORS		Stock
Light Grey	SR.n/a SRI n/a	✓
Tan	SR.n/a SRI n/a	✓


Single Unit



48" STEP 1200 x 180 x 500mm 47 1/4 x 7 x 19 3/4" 6 units/Bundle 2.33 Fc.Ft./Stone

U-Cara® Multi-Face Wall System



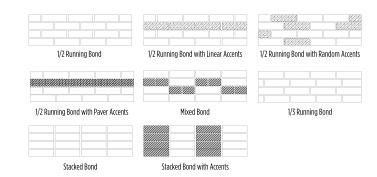

APPLICATIONS













. .

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth, Standard, Series Exposed, Umbriano® Mottled, Pitched & Flamed

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits see page 17.





BAVARIAN



FOSSIL



GRANITE FUSION





BAVARIAN



DARK CHARCOAL



GRANITE FUSION



OPAL BLEND

Bucine Bluestone





FRENCH GREY



SUMMER WHEAT

SERIES™ FINISH

UMBRIANO° FINISH COLORFUSION™ Subtly mottled color finish



BUCINE BLUESTONE





Granite, Quartz and Marble surface materials

ONYX BLACK

U-Cara® Multi-Face Wall System

		Standard Smooth Fascia Panel	Closed-End Smooth Fascia Panel	Standard Umbriano Fascia Panel	Closed-End Umbriano Fascia Panel	3" Series Fascia Panel	Standard Pitched Fascia Panel	Closed-End Pitched Fascia Panel	Bucine Bluestone Corner Flamed	Bucine Bluestone Std Flamed
В	Bundle Type	SINGLE	MULTI	SINGLE	MULTI	SINGLE	SINGLE	MULTI	MULTI	SINGLE
Pla	int Produced	CHICAGO	CHICAGO	MARENGO	MARENGO	CHICAGO	MARENGO	MARENGO	BERTI SISTO	BERTI SISTO
Thic	ckness (mm)	150MM	150MM	150MM	150MM	71MM	150MM	150MM	148MM	148MM
	Bundle	61.52	54.18	61.52	54.18	59.32	61.52	54.18	-	-
FOFT DED	Crate	-	-	-	-	-	-	-	83.81	125.60
FCFT PER	Section	10.25	9.03	10.25	9.03	9.89	10.25	9.03	-	-
	Stone	0.73	1.29	0.73	1.29	0.18	0.73	1.29	-	-
DED DUNDI E	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00	-	-
PER BUNDLE	Sections	-	-	-	-	-	-	-	-	-
	Bundle	129.50	104.86	129.50	107.94	-	129.50	107.94	-	-
LNFT PER	Unit	1.54	2.50	1.54	2.57	-	1.54	2.57	-	-
	SqFt	1.37	0.78	1.37	0.78	5.66	1.37	0.78	-	-
	Section	-	-	-	-	-	-	-	-	-
UNITS PER	Crate	-	-	-	-	-	-	-	96.00	180.00
	Bundle	84.00	42.00	84.00	42.00	336.00	84.00	42.00	-	-
	Layer	275	207	344	345	250	317	236	-	-
	Section	-	-	-	-	-	-	-	-	-
LBS PER	Crate	-	-	-	-	-	-	-	1,372	2,263
	Bundle	1,648	1,241	2,067	2,067	1,501	1,904	1,416	-	-
COLORS		Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Bavarian		1	1	-	-	-	1	✓	-	-
Bucine Bluestone		-	-	-	-	-	-	-	/	✓
Dark Charcoal		1	/	-	-	-	-	-	-	-
Fossil		-	-	-	-	-	✓	/	-	-
French Grey		-	-	1	/	-	-	-	-	-
Granite Fusion		1	1	-	-	-	1	/	-	-
Opal Blend		1	1	-	-	-	-	-	-	-
Onyx Black		-	-	-	-	✓	-	-	-	-
Summer Wheat		-	-	1	1	-	-	-	-	-

Fascia Panels



6"STANDARD FASCIA PANEL 5% x 18% x 2%150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



6"STANDARD BUCINE BLUESTONE FASCIA PANEL 5 1/8 x 17 1/4 x 1 1/2" 148 x 438 x 38mm 180 units/Crate

.70 Fc.Ft./Stone



3" FASCIA **PANEL** 2 1/8 x 9 x 2 3/8" 71 x 231 x 60 mm 336 units/Bundle .18 Fc.Ft./Stone

2 Unit Corner



CLOSED-END FASCIA PANEL 5 1/8 x 20 1/8 x 2 3/8" 150 x 530 x 60mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts STANDARD **BUCINE BLUESTONE FASCIA HALF PANEL** 5 % x 9 ½ x 2 3/8"

150 x 233 x 60mm 48 units/Crate .87 Fc.Ft./Stone



CLOSED-END **BUCINE BLUESTONE** FASCIA PANEL $5\% \times 20\% \times 23\%$ 148 x 510 x 38mm 48 units/Crate .87 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System

These pages were added by Angela in discussion with Diane please wait until all of the pages she is creating are added.



ENDURACOLOR™

COLORFUSION™

see page 17.

Refined surface and long-lasting color

Subtly mottled colored finish

TECHNICAL INFORMATION Conforms to ASTM C 1372

Eligible for LEED v4.1 credits -

APPLICATIONS














CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com


APPEARANCE

Edge Detail - n/a Surface Texture - Smooth, Standard, Series Exposed, Umbriano® Mottled, Pitched & Flamed

U-CARA RETAINING WALL GEOGRID SECTION

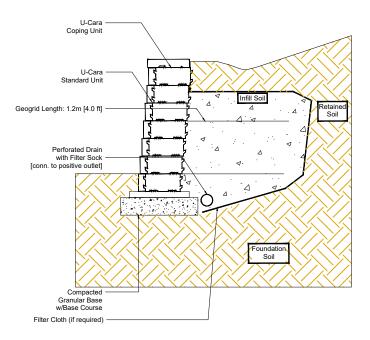

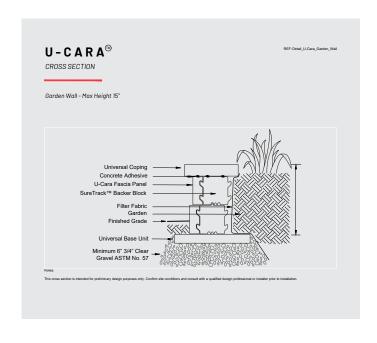

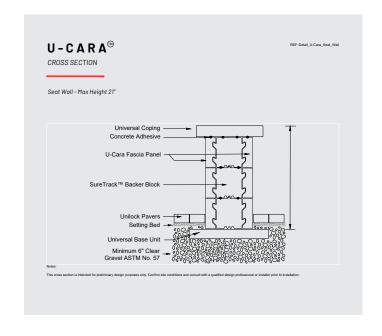

U-Cara[®] Multi-Face Wall System

Components



SURE TRACK CORNER BACKER6 x 7 x 12"
150 x 175 x 300mm



SURE TRACK LARGE BACKER6 x 7½ x 12"
150 x 190 x 300mm



SURE TRACK STANDARD BACKER 6 x 8 x 6" 150 x 200 x 150mm

		LARGE/CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150MM	150MM	150MM
	Bundle	15.82	20.35	33.91
FCFT PER	Layer	3.96	6.78	11.30
	Stone	0.28	0.32	0.32
PER BUNDLE	Layers	4.00	3.00	3.00
T EN BONDEE	Sections	-	-	-
	D II .		44.04	69.99
LNFT PER	Bundle	-	41.34	
	Unit	-	0.66	0.67
	SgFt	3.54	3.10	3.10
UNITS PER	Section	-	-	
OMITOTER	Bundle	56.00	63.00	105.00
	Dundle	30.00	03.00	103.00
	Layer	521	925	819
LBS PER	Section	-	-	-
	Bundle	2,085	2,774	2,458

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: **A** urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Recommended Base Unit



Extra Components



SURE TRACK CORNER INSERT L = 2" 50mm


U-Cara® Modular System

LOOKING FOR MORE INFORMATION?

Visit Unilock.com to download the U-Cara Modular System Brochure.




The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

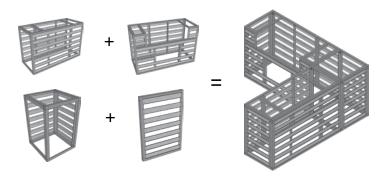



With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Tables and Pillars.

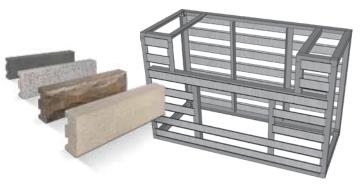



NO.	MODEL	DESCRIPTION
RS-UCARA000001	URS	UCARA 8' RAIL (10/PACK)
RS-UCARA000002	URS	ALIGNMENT BARS 39" (10/PACK)
RS-UCARA000005	UL-HCK	U-CARA HEIGHT CONVERSION
RS-UCARA000006	UL-HCK-OS	U-CARA HEIGHT CONVERSION KIT-OS
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000014	UL-HCK-CC-0S	U-CARA HEIGHT CONV CORNER CAB
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED

NO.	MODEL	DESCRIPTION
RS-UCARA001000	UL-GC	UNIVERSAL GRILL CABINET
RS-UCARA002000	UL-BC	BASE CABINET
RS-UCARA003000	UL-CC	CORNER CABINET 27.5" X 27.5"
RS-UCARA003001	UL-CCOS	CORNER CABINET 27.5" X 36.5"
RS-UCARA003002	UL-CCBP	CORNER CABINET PANEL
RS-UCARA004000	UL-ECK	END CLAD KIT 27.5"
RS-UCARA004001	UL-ECKOS	END CLAD KIT 36.5"
RS-UCARA005000	UL-BS	BACKSPLASH GRILL/BASE UNIT 64.5"
RS-UCARA005001	UL-BSCC	BACKSPLASH CORNER CABINET
RS-UCARA005002	UL-BSCCOS	BACKSPLASH CORNER CABINET OS
RS-UCARA006000	UL-DD	UCS STNLSS DBL ACCESS DOORS 27"
RS-UCARA007000	UL-PU	PILLAR UNIT

U-Cara® Rail System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR: 39" LENGTH - SOLD IN PACKS OF 10 PIECES



U-CARA RAILS: 8' LENGTH - SOLD IN PACKS OF 10 PIECES

Universal Coping & U-Grip™ Base





APPLICATIONS









APPEARANCE

Edge Detail - n/a Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

- see page 17.

	UNIVERSAL U-GRIP BASE CLASSIC	UNIVERSAL COPING SMOOTH ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	55MM	70MM

FCFT PER	Bundle	-	17.44
	Layer	-	2.18
	Stone	-	0.36

PER BUNDLE	Layers	9.00	8.00
PER BUNDLE	Sections	-	-


LNFT PER	Bundle	85.50	75.90
	Unit	1.58	1.58

	SqFt	-	2.75	
UNITS PER	Section	-	-	
	Bundle	54.00	48.00	

	Layer	280	361	
LBS PER	Section	-	-	
	Bundle	2,524	2,890	

COLORS		Stock	Stock
Buff (EnduraColor)	SR.n/a SRI n/a		✓
Grey (EnduraColor)	SR.n/a SRI n/a		✓
Natural (Classic)	SR.n/a SRI n/a	/	







BUFF (COPING)

GREY (COPING)

NATURAL (U-GRIP)

Single Units



UNIVERSAL COPING482 x 70 x 355mm
19 x 2 ³/₄ x 14"
48 units/Bundle
.36 Fc.Ft./Stone



U-GRIP BASE 482 x 55 x 355mm 19 x 2 ½ x 14" 54 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is shipped on a required, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.

















APPEARANCE

Edge Detail - n/a Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from historic street pavers

STONEMARK™

Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits - see page 17.

		FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	60MM	70MM	70MM	70MM	70MM
	Bundle	5.12	5.52	5.52	6.87	6.87
FCFT PER	Layer	0.39	1.38	1.38	1.72	1.72
1 210	Stone	0.39	0.46	0.46	0.57	0.57
PER	Layers	13.00	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-	-
LNFT	Bundle	26.00	24.00	24.00	30.00	30.00

Unit 2.00 2.00 2.00 2.50 2.50 2.50	BUNDLE	Sections	-	-	-	-	-
Value							
UNITS PER SqFt 2.54 2.18 2.18 1.75 1.75	LNFT	Bundle	26.00	24.00	24.00	30.00	30.00
UNITS PER Section -	PER	Unit	2.00	2.00	2.00	2.50	2.50
UNITS PER Section -							
PER Section -		SqFt	2.54	2.18	2.18	1.75	1.75
Bundle 1.00 12.0		Section	-	-	-	-	-
LBS Section		Bundle	1.00	12.00	12.00	12.00	12.00
LBS Section							
PER Section		Layer	56	193	199	282	279
		Section	-	-	-	-	-
		Bundle	723	772	796	1,128	1,116

COLORS		Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	/	1	✓	✓	✓
Grey	SR.n/a SRI n/a	1	/	✓	1	/





BUFF

GREY





FULLNOSE COPING 610 x 305 x 60mm 24 x 12 x 2 3/8" 13 unit/Bundle .39 Fc.Ft./Stone



STANDARD COPING 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 unit/Bundle .46 Fc.Ft./Stone



STANDARD CLOSED-END COPING 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 unit/Bundle .46 Fc.Ft./Stone



LARGE COPING762 x 343 x 70mm
30 x 13 ½ x 2 ¾"
12 unit/Bundle
.57 Fc.Ft./Stone



LARGE CLOSED-END COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. See page 85 for caulk information. All measurements are nominal. Contact Unilock for more information.

Ledgestone[™] Pillar Caps, Steps & Large Step Tread





	30" STEP TREAD	48" STEP	72" STEP	24" PILLAR CAP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	MULTI-PLANT	MULTI-PLANT	CHICAGO
Thickness (mm)	70MM	150MM	150MM	100MM
Bundle	6.87	5 91	8 86	3 28

	Bundle	6.87	5.91	8.86	3.28
FCFT PER	Layer	1.72	1.97	2.95	0.66
	Stone	0.57	1.97	2.95	0.66

PER BUNDLE	Layers	4.00	3.00	3.00	5.00
	Sections	-	-	-	-

LNFT PER	Bundle	30.00	12.00	18.00	10.04
LNFIPER	Unit	2.50	4.00	6.00	2.01

	SqFt	1.75	0.51	0.34	1.52
UNITS PER	Section	-	-	-	-
	Bundle	12.00	3.00	3.00	5.00

	Layer	199	574	860	159
LBS PER	Section	-	-	-	-
	Bundle	796	1,721	2,581	795

COLORS		Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	1	✓ /	1	1
Grev	SR.n/a SRI n/a	/	/	1	1

APPLICATIONS









Edge Detail - n/a Surface Texture - Textured

TECHNOLOGIES

$\textbf{REALA}^{\scriptscriptstyle{\text{TM}}}$

Cast from historic street pavers

STONEMARK™

Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits - see page 17.





BUFF

GREY

Single Units



30" STEP TREAD 762 x 343 x 70mm 30 x 13 x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone



48" STEP1220 x 610 x 150mm
48 x 24 x 5 %"
12 unit/Bundle
1.97 Fc.Ft./Stone



72" STEP1830 x 610 x 150mm
72 x 24 x 5 % 3
unit/Bundle
2.95 Fc.Ft./Stone



24" PILLAR CAP 610 x 610 x 100mm 24 x 24 x 3 %" 5 unit/Bundle .66 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

















APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

$\mathbf{ANTIQUED}^{\scriptscriptstyle\mathsf{TM}}$

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

	FULLNOSE SMOOTH CLASSIC ANTIQUED
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	70MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	4.00

LNFT PER	Bundle	96.00
LNFIPER	Unit	0.50

UNITS PER	SqFt	-
	Section	48.00
	Bundle	192.00

	Layer	371
LBS PER	Section	742
	Bundle	2,969

COLORS		Stock
Charcoal	SR12 SRI 9	✓
Sandstone	SR41 SRI 46	✓
Sierra	SR. n/a SRI n/a	/







CHARCOAL

SANDSTONE

SIERRA

Single Unit



BRUSSELS FULLNOSE 150 x 300 x 70mm 5 1/8 x 11 1/8 x 2 3/4" 192 unit/Bundle XX Fc.Ft./Stone

6 x 12 Fullnose **CLASSIC**



APPLICATIONS















APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

	FULLNOSE EDGER SMOOTH CLASSIC
Bundle Type	SINGLE
Plant Produced	MULTI-PLANT
Thickness (mm)	70MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	4.00
PER BUNDLE	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	0.50

	SqFt	-
UNITS PER	Section	48.00
	Bundle	192.00

	Layer	745	
LBS PER		Section	373
		Bundle	2,982

COLORS		Stock
Charcoal	SR. n/a SRI n/a	✓
Sandstone	SR. n/a SRI n/a	✓
Sierra	SR. n/a SRI n/a	/







CHARCOAL

SANDSTONE

SIERRA

Single Unit



FULLNOSE EDGER 150 x 300 x 70mm $5\,\%8 \times 11\,\%8 \times 2\,34"$ 192 unit/Bundle XX Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Architectural Coping & Pillar Cap





APPLICATIONS













APPEARANCE

Edge Detail - n/a Surface Texture - Exposed Joint Spacing - n/a

TECHNOLOGIES

$\mathbf{ENDURACOLOR}^{\mathsf{T}}$

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

		COPING ENDURACOLOR	PILLAR CAP 28" ENDURACOLOR
	Bundle Type	SINGLE	SINGLE
	Plant Produced		
	Thickness (mm)	60MM	76MM
	D dl -		
SQFT PER	Bundle	-	-
	Unit	-	-
FCFT PER	Bundle	-	
	Layer	-	-
	Unit	-	-
	5 "	40.00	
LNFT PER	Bundle	42.00	-
	Unit	2.00	-
	Bundle	21.00	6.00
UNITS PER	SqFt	-	-
LBS PER	Unit	68	183
LDO FLIX	D 11	4 400	4.000

1,428

1

1,098

Stock

1





BUFF

CHARCOAL



609 x 60mm x 355mm $24 \times 2 \frac{3}{8} \times 14$ "



Note: this unit is tapered at the top

COLORS

Charcoal

PILLAR CAP 711 x 76mm x 711mm $28 \times 3 \times 28$ "

Bundle

SR n/a SRI n/a

SR n/a SRI n/a

Notes: SOLD IN FULL PALLETS ONLY and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Standard Joint Spacing - n/a Void % - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits - see page 17.

		SQUARE W/GRILL	SQUARE UNIT	ROUND W/GRILL	ROUND UNIT
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced				
	Thickness (mm)	300MM	300MM	300MM	300MM
	,				
	Outside	56.00	56.00	52.00	52.00
DIAMETER (inch)	Inside	40.00	40.00	36.00	36.00
	Insert	38.00	38.00	34.00	34.00
LAYER PER UNIT		3.00	3.00	3.00	3.00
UNIT PER LAYER		16.00	16.00	18.00	18.00
UNIT PER PALLET		48.00	48.00	54.00	54.00
LBS PER PALI	LET	1,545	1,525	1,145	1,125

COLORS		Stock	Stock	Stock	Stock
Coffee Creek	SR. n/a SRI n/a	-	-	1	1
Granite	SR. n/a SRI n/a	-	-	1	/
Sandstone	SR. n/a SRI n/a	/	1	1	/
Sierra	SR n/a SRI n/a	/	1	1	/

SUNSET FIRE PIT KIT	Square	Round
Coffee Creek	-	RS-CON032
Coffee Creek w/ Grill	-	RS-CON035
Granite	-	RS-CON082
Granite w/Grill	-	RS-CON083
Sandstone	RS-CON037	RS-CON031
Sandstone w/ Grill	RS-CON040	RS-CON034
Sierra	RS-CON036	RS-CON030
Sierra w/ Grill	RS-CON039	RS-CON033



COFFEE CREEK Available in round only



GRANITEAvailable in round only



SANDSTONE



SIERRA



SUNSET ROUND W/GRILL 1300 x 1300 x 300mm 51 ½ x 51 ½ x 11 ½"



SUNSET ROUND UNIT 1300 x 1300 x 300mm 51 ½ x 51 ½ x 11 ½ "8"



SUNSET SQUARE W/GRILL 1400 x 1400 x 300mm 55 x 55 x 11 7%"



97

SUNSET SQUARE UNIT 1400 x 1400 x 300mm 55 x 55 x 11 7%"

Notes: All measurements are nominal. Contact Unilock for more information.

Unilock Elements

Tuscany Collection



TUSCANY FIREPLACE
Sandstone with Copthorne® (3 Color Blend)

ELEMENT PRODUCT CODES

Tuscany Collection	Sandstone	Sierra
Fireplace Top	RS-ELE074-1	RS-ELE095-2
Fireplace Bottom	RS-ELE088-1	RS-ELE096-2
Wood box Set	RS-ELE028-1	RS-ELE027-1
Arched Hearth	RS-ELE016-1	RS-ELE017-1



TUSCANY FIREPLACE Sierra with Copthorne® (3 Color Blend)

WEIGHTS

Tuscany Collection

Fireplace Top — 2925 lbs Fireplace Bottom — 4225 lbs Wood Boxes — 4005 lbs Arched Hearth — 1170 lbs

Barcelona Collection



BARCELONA FIREPLACE
Sierra with Umbriano® (Summer Wheat)


ELEMENT PRODUCT CODES

Barcelona Collection Sierra Fireplace RS-ELE214 Wood box Set RS-ELE213 Arched Hearth RS-ELE212


WEIGHTS:

Unilock Elements

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

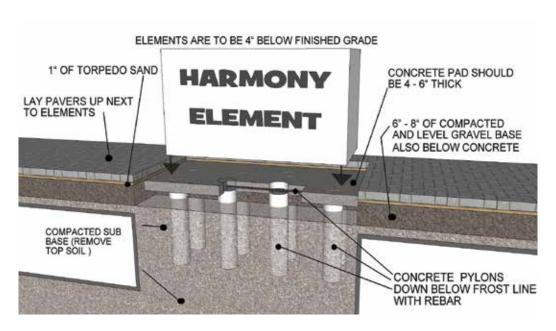

TUSCANY & BARCELONA FIREPLACE

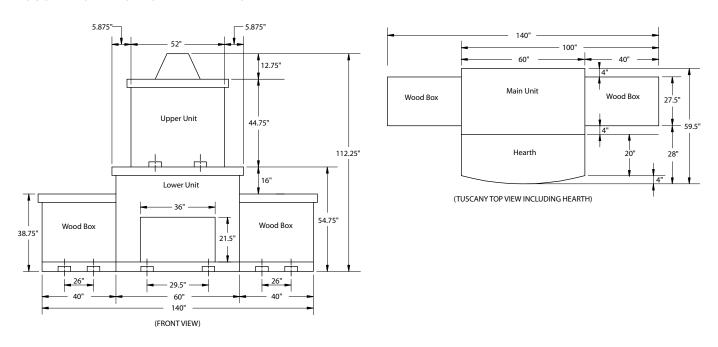

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Techniseal Pro Series Cleaning Products



PROFESSIONAL GRADE OIL & GREASE REMOVER RS-CLN001

Professional Grade Oil and Grease Remover is an industrial strength petroleum-based product. It lifts and absorbs embedded oil and grease stains as it dries from a liquid to a powder. Specially formulated for concrete pavers, slabs walls, natural stone, poured or stamped concrete, etc. Works without damaging or discoloring material and is easy to use.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. Packaging: •1 quart container •6 per case •100 cases per skid (600 qts)



PAVER PRIMER & EFFLORESCENCE REMOVER RS-CLN002

Paver Primer is specially formulated to dissolve efflorescence (whitish salt deposit) and remove ground-in dirt on paving stones and concrete, without discoloring or damaging surfaces. It cleans evenly, and enables the sealant to better penetrate the material to be treated.

• Due to HAZMAT Regulations, no more than 1,000lbs may be picked up at one time.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Packaging: •1 Gallon • Box of 4 x 1 US gallon • 45 cases per skid (180 gallons) • 150 sq ft approx. coverage



RUST REMOVER RS-CLN012

Paver Cleaner cleans rust from paving stones and concrete without discoloring the surface.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Packaging: •1 Quart container •6 per case •120 cases per skid (720 gts)



PAINT, TAR & RUBBER REMOVER RS-CLN007

Description: Paver Cleaner thoroughly dissolves paint, tar or bitumen, rubber and chewing gum, from paving stones, concrete, and masonry.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Packaging: •1Liter container (1US qt) •6 per case
•120 cases per skid (720 x 1 liter/ 720 x 1 US qt)



PAVER RESTORER RS-CLN044

Description: Paver Restorer's concentrated formula removes cement slurry and jointing haze, as well as stains generated by pavers and slab cuts. Unlike muriatic acid, Paver Restorer has very little odor and is environmentally friendly.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. Packaging: •1 Gallon •4 per case

• Cleans up to 200 square feet per gallon • Coverage depends on surface porosity and severity of haze.

Surebond Cleaning Products



SUREBOND SURECLEAN RS-CLN014 (1 Gal) / RS-CLN063 (5 Gal) SPECIAL ORDER)

SureClean is a powerful, super concentrated non-acid multi-use cleaner that dislodges deep set dirt and grime, tire scuffing, and environmental soiling. SureClean's unique Clean Rinse Technology allows residue to be quickly and easily rinsed away with a high or low pressure washer. Its biodegradable and environmentally friendly phosphate-free formula replaces most harsh acid cleaners and its alkaline nature will help neutralize acid based detergents and cleaners. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Due to HAZMAT Regulations, no more than 1000 lbs. may be picked up at one time.

Packaging: •1 Gallon •4 per case •27 Cases per Skid



SUREBOND EFFLO OFF RS-CLN062 (1 Gal) / RS-CLN067 (5 Gal) SPECIAL ORDER

Efflo Off is a buffered, non-acid, organic salts, technologically advanced concentrated cleaner designed for the removal of efflorescence, mineral and salt deposits from virtually any type of hardscape surface with minimal or no brushing. Efflo Off is mild but may be corrosive to certain woods, metals and plants. Covering and protecting surrounding areas during application may be required. Efflo Off's unique Clean Rinse Technology allows residue to be quickly and easily rinsed away with a high or low pressure washer. Efflo Off's biodegradable and environmentally friendly phosphate free formula replaces several types of harsh acid cleaners and its alkaline nature will help neutralize acid based detergents and cleaners. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. **Due to HAZMAT Regulations, no more**

than 1000 lbs. may be picked up at one time. (27 cases per skid or 25-5 gallons per skid/truckload)
Packaging: •1 Gallon •4 per case •36 Cases per Skid (144 each)



SUREBOND STAIN & RUST BUSTER RS-CLN065 (1 Quart)

S.R.B. is a powerful, concentrated spot cleaner which dislodges and removes common stains caused by moss, mildew, leaf, rust, blood, beverage spills and non-greasy food. S.R.B.'s concentrated, biodegradable formula allows for a full spectrum of dilutions matched to your cleaning needs. S.R.B.'s unique Clean Rinse Technology quickly and easily rinses away residue with a high or low pressure washer. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Packaging: •1 Quart •12 per case •27 Cases per Skid (324 each)

Adhesives



SUREBOND SB-10 ADHESIVE RS-ADH009-1(10 oz) / RS-ADH015-1(28 oz)

(Conforms to UN-STD. 1804, ASTM 2339-70& FHA UM-60) Color: light tan

Surebond **SB-10** adhesive **SB-10** Paver Bond is a fast set up, quick curing, superior strength, structural grade hardscape adhesive. Adheres well in extreme conditions such as temperatures ranging from 0° to 100° F, frozen and/or damp substrates. Superior durability to withstand extreme wear and tear including heavy vehicular traffic. Helps to level and shim. Applies easily with a caulking gun. • Low odor • VOC compliant • 900 psi

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. Packaging: •10 oz. Tube: 12/case & 140 cases/skid •28 oz Tube: 12/case & 60 cases/skid



ALLIANCE XP GATOR BLOCK ADHESIVE RS-ADH039 (10 oz) / RS-ADH040 (28 oz)

Gator Block Bond Adhesive is one of the strongest polyurethane adhesives on the market, specially formulated for bonding concrete, natural stone, blocks, bricks and pavers and can be used on dry or damp surfaces. It bonds permanently in 24 hours.

• Low odor • VOC compliant • 850 psi in 24 hours/1000 psi in 7 days

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Packaging:

• 10 oz. Tube: 12/case & 90 cases/skid

• 28 oz Tube: 12/case & 60 cases/skid



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

RS-ADH048 (24 oz)

24 oz. Canister = 600 linear feet at 3/8" bead (12/case)

Structure Bond is an innovative super-strength foam adhesive that bonds a wide range of construction products. Application time is up to 50% faster than with conventional tube adhesives and materials are bonded in just 8 minutes and adhesive is full cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



TECHNISEAL STRUCTURE BOND™ GUN II

RS-T00L378

1 Dispenser (12/case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user fatique, with total control on product flow. This gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartidge nozzles.



TECHNISEAL STICKY STONE RS-ADH055 STICKY STONE GUN RS-T00L557

20.3 oz. Sausage: 50' at 1/4" Bead

Professional-grade vertical hardscape adhesive that bonds various construction substrates fbeautifully and durably.

SURFACE TYPE: Natural Stone, Concrete Paver, Porcelain Tile, Wood

COVERAGE: Coverage power will depend on the dimensions of the application surface. ex. ¼" x ¼" deep area, a single

20.3 oz. sausage will cover 50 lin. ft. On an $\frac{5}{16}$ " x $\frac{1}{4}$ " deep area, the same size will cover 40 lin. ft.

Sealing Products



SUREBOND SB-8700 WET LOOK JOINT STABILIZING SEALER

RS-SEAL151 (1 gal) / RS-SEAL152 (5 gal) / RS-SEAL176 (55 gal) SPECIAL ORDER

SUREBOND 8700 is an advanced premium acrylic sealer with a gloss finish that repels water within 90 minutes and stabilizes joint sand. SUREBOND 8700 is specially formulated with antifungal agents designed to help inhibit the growth of mold, fungi and moss on horizontal pavement surfaces. This breathable sealer can be applied immediately to new installations and will not trap naturally occurring efflorescence. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. • Due to HAZMAT regulations, no more than 1000lbs may be picked up at one time. (27 cases per skid or 22-5 gallons per skid/truckload)

Packaging: •4 1-gallons/case

•Approximate coverage 80-120 sq.ft. per gallon



SUREBOND SB-1300 JOINT STABILIZING SEALER

RS-SEAL037-2(1gal)/RS-SEAL036(5gal)/RS-SEAL038(55gal) SPECIAL ORDER

Surebond 1300 is an epoxy modified, single-component VOC, EPA, and OSHA compliant, solvent-free, penetrating sealer that provides protection to interlocking paving stone installations against salt spray, acid rain, food and beverage stains, and other oxidizers. This matte finish sealer binds joint sand together to ensure the integrity of the pavement by forming a homogeneous, flexible pavement that stops erosion or joint sand failures in large paver installations. It is also used to seal retaining walls and for concrete and aggregate and split-face stone to protect against staining, salt spray, and acid rain damage and discoloration for architectural, industrial, and residential installations. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS

Packaging: •41-gallons/case •36 cases per skid •36-5 gallon pails/skid •Approx. coverage 100-150 sq.ft. per gallon

Sealing Products continued

WET LOOK

TECHNISEAL® WL4 PROSERIES WET LOOK WATER REPELLANT

RS-SEAL001(1gal) / RS-SEAL073(5 gal) / RS-SEAL003(55 gal) SPECIAL ORDER

Made of acrylic and plasticizers, Wet-Look Paver Protector (WL4) is a wet-look, gloss-finish and microporous transparent coating that protects pavers made of concrete while enhancing their original color. It reduces oil and dirt penetration, and makes cleaning easier. Easy to apply, it penetrates the surface for maximum adhesion and durability. It will not peel or discolor. It resists the elements (freeze-thaw cycles, sun, rain, etc.), as well as calcium and salt. It also resists hot tire pick-up. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. For outdoor use only. • Due to HAZMAT regulations, no more than 1000lbs may be picked up at one time. (22 Cases per skid or 19-5 Gallon pails per skid/truckload)

Packaging: • 41-gallons per case • Approximate coverage 100-150 sq.ft. per gallon



TECHNISEAL® WL5 PROSERIES WET LOOK RECOATER PAVER PROTECTOR

RS-SEAL113 (1gal) / RS-SEAL096 (5 gal)

Wet Look Recoater (WL5) is specially formulated for surfaces previously sealed with the WL4 or WLWR Protectors. This easy to apply sealer, adds a rich satin and glossy appearance to pavers. Consisting of acrylic and plasticizers, the Wet Look Recoater (WL5) can be used to effectively protect and enhance hardscape installations. The sealer has optimum oil repellency and resists the assaults of weather (freeze-thaw cycles, sun, rain, etc.) as well as calcium and salt. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. For outdoor use only. • Due to HAZMAT regulations, no more than 1000lbs may be picked up at one time. (22 cases / skid or 19 x 5 gallon per truck load)

Packaging: • 4 1-gallons per case • Approximate coverage 100-150 sq.ft. per gallon



BP PRO WL WET LOOK SOLVENT-BASED SEALER

RS-SEAL049-1(1gal)/RS-SEAL050(5gal)/(55gal) SPECIAL ORDER

Designed specifically for use on block paving to seal the paver surface and fuse the joint sand. It is a solvent-based single component polymer that creates a semi-gloss finish. It has the consistency of a light oil and is clear in appearance. It has a strong odor when in its liquid state and dries to a transparent semi-gloss finish with a darkened wet look. It can be used outdoors on new and existing projects because it is UV stable. WetLook Stabilizing Sealer can be applied immediately because it is breathable and does not trap moisture and it has outstanding coverage. The product is easy to install and offers great stain and environment protection. Cured product is heat and freeze resistant. Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS. • Due to HAZMAT regulations, no more than 1000lbs may be picked up at one time. (27 cases per skid or 25-5 gallons per skid/truckload)

Packaging: •4 1-gallons per case •50-125 sq.ft. coverage per gallon (approx.)



BP PRO INVISIBLE STAIN BLOCKER ISB

RS-SEAL127(1 Gal) / RS-SEAL128 (5 Gal) LIMITED STOCK AVAILABLE

Designed specifically for use on block paving to provide an invisible stain resistant barrier. It is a water-based single component polymer that penetrates to give you an invisible natural finish. StainBlocker is a green product that is solvent free and environmentally friendly. It is VOC, EPA, OSHA and FDA compliant. It is non-hazardous and non-toxic and has the consistency of water and a milky white appearance and a slight odor when in it's liquid state and dries to an invisible finish. It can be used indoors and outdoors on new and existing projects because it is safe and UV stable. StainBlocker can be applied immediately because it breathable and it has outstanding coverage. The product is easy to install and offers excellent stain protection and reduces the formation of efflorescence. Cured StainBlocker is heat and freeze resistant.

Packaging: •41-gallons per case •150-250 sq.ft. coverage per gallon (approx.)



BP PRO WSS WET LOOK JOINT STABILIZING SEALER

 ${\sf RS-SEAL078\,(1\,gal)/\,RS-SEAL079\,(5\,gal)/\,RS-SEAL080\,(55\,gal)} \ \ {\sf SPECIAL\,\,ORDER}$

Designed specifically for use on block paving to seal the paver surface and fuse the joint sand. It is a solvent-based single component polymer that creates a semi-gloss finish. It has the consistency of a light oil and is clear in appearance. It has a strong odor when in its liquid state and dries to a transparent semi-gloss finish with a darkened wet look. It can be used outdoors on new and existing projects because it is UV stable. WetLook Stabilizing Sealer can be applied immediately because it is breathable and does not trap moisture and it has outstanding coverage. The product is easy to install and offers great stain and environment protection. Cured product is heat and freeze resistant. • Due to HAZMAT Regulations, no more than 1000 lbs. may be picked up at one time. (27 cases per skid or 25-5 gallons per skid/truckload)

Packaging: • 4 1-gallons per case • 50-125 sq.ft. coverage per gallon (approx.)



BP PRO ESS ENHANCED JOINT STABILIZING SEALER

 ${\sf RS-SEAL042} \ (1\, {\sf gal}) \ / \ {\sf RS-SEAL043} \ (5\, {\sf gal}) \ / \ {\sf RS-SEAL044} \ (55\, {\sf gal}) \ \ {\sf SPECIAL} \ {\sf ORDER}$

BP Pro Enhanced Joint Stabilizing Sealer is designed specifically for use on block paving to stabilize joint sand and seal the paver surface. It is a water-based, single-component polymer that penetrates into the pores and seals the surface with a coating that creates a semi-gloss finish. Enhanced Joint Stabilizing Sealer is a green product that is solvent free and environmentally friendly. It is VOC, EPA, OSHA, and FDA compliant. It is non-hazardous and non-toxic. Stabilized joint sand will significantly reduce weeds and insect infestations. It is a dual-purposed surface and joint sand stabilizer.

Packaging: • 4 1-gallons per case • 36 cases per skid • 36 5-gallons per skid • 4 55-gallon container per skid

• 80-100 sq.ft. coverage per gallon (approx.)

Sands



SEK JOINTING SAND

RS-SAND001-1 - Tan / RS-SAND140 - Grey / RS-SAND186 - Black / RS-SAND148 - Platinum

Kiln dried and angular shaped in order to flow easily and stay in place.

Packaging: •50 lb/bag •56 bags/skid



SEK POLYSWEEP SAND

RS-SAND045 - Tan / RS-SAND046 - Grey / RS-SAND184 - Black / RS-SAND147 - Platinum

X-treme Wide PolySweep - RS111 - Russet Brown / RS-SAND117 - Grey

For concrete paver, cast stone pavements, slabs and natural stone joints up to 3/4". PolySweep polymeric sand is a blend of native sands and high quality synthetic polymers specially formulated to allow the joints to expand and contract with elements such as extreme heat, extreme cold and freeze/thaw cycles.

Packaging: •50 lb/bag •56 bags/skid



TECHNISEAL PRO SERIES SMARTSAND POLYMERIC SAND

RS-SAND169 - Tan / RS-SAND168 - Grev

A special mix of graded sand and binder, designed for standard paver joints less than 1", specifically formulated for achieving optimum lock-up of pavers or slabs by filling the joints between them. Unlike regular sweeping jointing sand, Polymeric Sand resists insect penetration, weed growth, and erosion. New formulation with half hour setting time. Coverage: Approx. 75 sq. ft./bag Coverage will vary depending on the type/size of stone used. Note: This product is recommended with extra care for use with Copthorne*, Courtstone*, Richcliff*, Town Hall* and Umbriano* products. Umbriano must have the surface cleaned with a foam squeegee post installation. This product is not suitable for use with Il Campo*, SeriesTM and Unigranite*.

Packaging: •50 lb/bag •56 bags/skid (2860 lbs/skid)



TECHNISEAL PRO SERIES HP NEXTGEL POLYMERIC SAND

RS-SAND131 - Prairie Tan / RS-SAND130 - Prairie Grey

Designed for larger paver joints up to a maximum of 1 inch. This paver sand is a high-performance polymer sand – it is the ideal product for heavy traffic and wet areas. Weeds and insects in paver joints is part of the past with this high-end product. This polymer sand is a mixture of graded sand (ASTM C144) and binder. It penetrates easily into joints, ensuring a fast and efficient jointing solution. This easy to use jointing sand will start to harden in minutes after water activation, and it quickly becomes resistant to erosion caused by water (rain, sprinklers and spray). Coverage: 65-85 sq.ft. coverage per bag for narrow joints, larger joints will require more sand.

Packaging: •50 lb/bag •56 bags/skid (2860 lbs/skid)



ROMEX EASY-PRO™ NEW SIZE

RS-SAND066 - Tan / RS-SAND068 - Basalt Black / RS-SAND069 - Stone Grey

Ultimate Paving Stone Joint Compound. Designed for installation in light rain or sun with a surface temperature above 32°F, this pre-mixed epoxy resin product is ideal for patios, pool decks and walkways. It is also permeable. Features: Vacuum packed, pre-mixed and ready to use, eco-friendly (60% renewable products), no haze formulation, for joint widths starting from 1/4" wide and 1 1/4" deep. Colors: Tan, Black, Grey Coverage: Approximately 45 sq. ft./container. Coverage will vary depending on the type/size of stone used. STORAGE: Open product good for 30 day when covered with water. Note: This product is not suitable for use with Umbriano°, Il Campo°, Series™, Unigranite°. Artline™ and Bristol Valley°.

Packaging: • 33lb container / 64 pails per skid, premixed



ALLIANCE GATOR HP SUPER SAND BOND

RS-SAND078 - Beige / RS-SAND080 - Slate Grey

Wetcast & Natural Stone Joints up to 1"

Super Sand Bond is a unique mixture of polymer binders and calibrated sand available in Beige and Slate Grey. The installation of is almost identical to using regular paver joint sand, except for the application of water. Once Super Sand Bond sets, it becomes very firm and locks between the paver joints. This firm bond maintains pavers securely in place, being equally effective on both horizontal and sloped surfaces.

Packaging: •50 lb/bag •56 bags/skid



ALLIANCE GATOR MAXX BOND

RS-SAND074 - Beige / RS-SAND075 - Slate Grey

For Concrete Paver, Wetcast & Natural Stone Joints up to 1"

Gator Maxx Sand is the first polymeric sand specifically designed for drainage and non-drainage base systems. It can be used with concrete pavers, wetcast and natural stones. It is recommended for a variety of uses, including pool sides, patios, foot paths, driveways, parking spaces, pavements etc. This complete multi-purpose sand is available in two colors: Beige, and Slate Grey. It sets above the freezing temperature (32°F / 0°C) and can be used for joints up to a maximum of 1 inch.

Packaging: •50 lb/bag •56 bags/skid

Sands continued



ALLIANCE SUPER SAND G2

RS-SAND156 - Beige / RS-SAND157 - Slate Grey

SUPERSAND G2 is made with a state-of-the-art manufacturing process. Specifically, calibrated sand is mixed with sophisticated intelligent polymers. This new generation of Intelligent Polymers neutralizes haze and dust. No blower is needed and the intelligent polymeric sand requires only one watering. **SUPERSAND G2** is recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces and pavements.

Packaging: •50 lb/bag •56 bags/skid



ALLIANCE MAXX G2

RS-SAND158 - Beige / RS-SAND159 - Slate Grey / RS-SAND160 - Diamond Black / RS-SAND161 - Ivory

GATOR MAXX G2 is made with a state-of-the-art manufacturing process. Specifically, calibrated sand is mixed with sophisticated intelligent polymers. This new generation of Intelligent Polymers neutralizes haze and dust. The polymeric sand application is now dust free and haze free. No blower is needed and the intelligent polymeric sand requires only one watering. GATOR MAXX G2 is recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc.

Packaging: •50 lb/bag •56 bags/skid



ALLIANCE EUROSTONE BOND

RS-SAND095 - Slate Grey Note: Beige, Diamond Black & Ivory are discontinued for 2022

For Driveway Aprons Application & Cobblestone Joints up to 35mm / 1"

Eurostone Bond is the first polymeric sand specifically designed for drainage and non-drainage base systems. It can be used with natural stones and cobblestone. It is recommended for a variety of uses, including streets, plazas (pedestrian and vehicular traffic) paths, sloping areas, around pools, etc. This complete multi-purpose sand is available in three colors: Beige, Slate Grey and Diamond Black. It sets above the freezing temperature $(0^{\circ}C / 32^{\circ}F)$ and can be used for joints up to a maximum of 35mm/1".

Packaging: •50 lb/bag •56 bags/skid



ALLIANCE GATOR DUST BOND

RS-SAND072 - Beige / RS-SAND073 - Slate Grey

For Stone Joints 1/2" to 4"

Gator Dust is a unique mixture of polymer binders and calibrated crushed stone available in Sahara Beige or Stone Grey. Once Gator Dust sets, it becomes very firm and locks between the stone joints. This firm bond maintains the stones securely in place equally effectively on both horizontal and sloped surfaces.

Packaging: •50 lb/bag •56 bags/skid



ALLIANCE GATOR AOUA ROCK

RS-AGG032 - 50lb. bag (56 bags/skid) / RS-AGG033 (2200 lb. SuperSak)

For Permeable Paver Joints Graded ASTM NO.9 Granite Stone

Gator Aqua Rock is manufactured to meet ASTM No.9 requirements for permeable paver joint units. The calibrated gradation obtained from the fractured high-strength granite makes it the ideal product for the bedding course & jointing material to collect surface water run-off and help stabilize interlocking paver surfaces.

Packaging: •50 lb/bag •56 bags/skid

Coverage: • 20-25 Sq.Ft. = 50 lb bag • 880-1100 Sq.Ft. = 2200 lb bag



ALLIANCE GATOR NITRO SAND

RS-SAND196 - Beige / SAND197 - Grey / SAND198 - Black

Ready-to-use mixture of calibrated sand and resins which cure when exposed to air, hardening from top to bottom of the joint. Can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width. The minimum jointing depth is 1'(25mm).

Packaging: •40 lb/bucket •48 buckets/skid

Coverage: •10-56 Sq.Ft. per 40lb bag; yields approximately 10-56 square feet depending on joint size



SEK PERM CHIPS

RS-AGG035 - Eclipse Black / RS-AGG040 - Stormy Grey

2500 lb Super Sack also available: RS-AGG036 - Eclipse Black / RS-AGG041 - Stormy Grey / RS-AGG039 Saturn Tan

This high strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler. **SEK PermChip** is ideal for permeable paving stone installations, both as a bedding course and as a joint filler. An extremely hard material, it easily withstands the rigors of freeze/thaw cycles & won't break down, helping to control the runoff for years to come. The right choice for both residential and commercial applications including driveways, patios, walkways and parking lots.

* Saturn Tan (RS-AGG037) is Special Order - Full Skid Oty. only! *

Packaging: •50 lb/bag •56 bags/skid Coverage: •30-35 Sq.Ft. = 50 lb bag •1500-1750 Sq.Ft. = 2500 lb bag

Grid Systems and Landscape Fabric

Unilock® DriveGrid™ System




UNILOCK DRIVEGRID™ SYSTEM

RS-FAB075

- 120' x 13.1' Roll 1572 Sq. Ft.
- 56 lbs per Roll
- · Sold in Full Rolls Only

Stratagrid



STRATAGRID

RS-FAB101

Stratagrid is a geogrid reinformcement for soil and aggregate reinforcement. These high-molecular weight and high-tenacity polyester yarns, untilizing a complex knitting process and low-temperature coating technology to provide superior engineering properties. Yarns are precision-knitted into a dimensionally stable, uniform netowrk of apertures providing significant tensile reinforcement capacity. Stratagrid is engineered to be mechanically & chemically durable, in both the harsh construction installation phase and in aggressive soil environments (pH ranges from 2-10). A proprietary UV-stabilized coating provides further chemical and mechanical benefits.

SPECIFICATIONS

Ultimate and Creep-Limited Tensile Strength (lbs/ft) SGU60
Ultimate Strength 4,111
Creep-Limited Strength 2,875

Roll Dimensions (width x length) (feet) 6.25' x 288'
Area (square yards) 200
Weight per Roll (lbs) 85
Last Number GB-3022

Geotextile Fabric



GEOTEXTILE FABRIC

RS-FAB001

FX-40HS, a non-woven Multipurpose Geotextile Fabric composed of 100T Polyester continuous-filament yarns and heat bonded so the filaments retain their relative position.

SOLD IN FULL ROLL QUANTITIES ONLY.

15' x 300' (4500 sqft per roll)

SPECIFICATIONS

Physical Properties	Test Method	
6oz. NonWoven	Mechanical	
Puncture Strength (lbs)	ASTM D-4833	120
Water Flow Rate (gpm/ft²)	ASTM D-4491	130
Weight (oz/vd²)	ASTM D-3776	6.0
Thickness (mils)	ASTM- D-1777	75
Weight	225lbs/roll	

Grid Systems and Landscape Fabric continued



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating. Packaging & Unilock SKU:

- FAB070 4' x 50/12 rolls/case, 60 rolls/skid * Minimum Case Purchase *
- FABO71 SPECIAL ORDER 6' x 50' 40 rolls/skid
- FAB072 6' x 150'/25 rolls/skid



GATOR FABRIC NON-WOVEN 3.5 SPECIAL ORDER

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable. Packaging & Unilock SKU:

- FAB040 6' x 100' 30 rolls/skid
- FAB041 6' x 300' 16 rolls/skid



GATOR FABRIC NON-WOVEN 4.4

Gator Fabric Non-Woven 4.4 is a needle punched non-woven geotextile made of polypropylene fiber and is ideal for drainage, filtration and will allow water flow of 135 gallons per minutes per square foot (613 L/min/sq. m.) in paver or retaining wall applications. Its filament fibers are used for soil separation and drainage. They combine high durability along with excellent physical and hydraulic properties. It is non-biodegradable and resistant to most soil chemicals. Packaging & Unilock SKU:

- FAB043 3' x 100 6 rolls/case, 24 rolls/skid SPECIAL ORDER * Minimum Case Purchase *
- FAB044 4' x 100' 6 rolls/case, 36 rolls/skid * Minimum Case Purchase *
- FAB046 6' x 100' 30 rolls/skid * Minimum Case Purchase *
- FABO47 6' x 300' 16 rolls/skid * Minimum Case Purchase *



GATOR FABRIC POLYSPUN 20 SPECIAL ORDER

Gator Fabric Polyspun 8 geotextile is specially formulated to resist deterioration in garden and landscape applications. It creates a barrier to reduce weed growth and allows water, fertilizer and air to pass through.

Packaging & Unilock SKU:

- 3' x 50' FAB054 16 rolls/case, 64 rolls/skid SPECIAL ORDER * Minimum Case Purchase *
- 3' x 100' FAB055 9 rolls/case, 36 rolls/skid SPECIAL ORDER * Minimum Case Purchase *
- 4' x 100' FAB057 9 rolls/case, 36 rolls/skid SPECIAL ORDER * Minimum Case Purchase *
- 6' x 100' FAB058 30 rolls/skid SPECIAL ORDER * Minimum Case Purchase *

Base/Drainage Systems

GATOR TILE SYSTEM

Contact Unilock for more information.




Edge Restraints

SNAPEDGE - ONE-PIECE EDGING THAT DOES IT ALL!

RS-EDGE001 Low Profile - RS-EDGE017

- Only one part required for straight runs or curved installations.
- \bullet Built-in connector fastens one piece to the next convenient 96" size, easy to transport.
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning.
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- $\bullet \ \, \text{Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers}.$
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging.



RS-EDGE001

Product Information: 8'(96") length pcs. Sidewall: 17/8"

Pieces per Pallet: 672 (5,376 ln. ft.) Pieces per Bundle: 24 (192 ln. ft.) Bundles per Pallet: 28

Pallet Weight: 1395 lbs. Pallet Size: 98" I x 48"w x 50" h



Low Profile - RS-EDGE017

Product Information: 6'8" (80") length pcs. Sidewall: 13/8"

Pieces per Pallet: 672 (5,376 ln. ft.) Pieces per Bundle: 24 (192 ln. ft.)

Bundles per Pallet: 28 Pallet Weight: 1395 lbs. Pallet Size: 98" I x 48"w x 50" h

PERMEDGE PERMEABLE PAVER EDGING

RS-EDGE033

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.

Product Information: 8'(96")length pcs. Weight per Unit: 2.5 lbs. Pieces per Pallet: 64 (72 ln. ft.) Freight Class: 300


Pallet Weight: 210 lbs. Pallet Size: 98" l x 48"w x 50" h



Spikes

RS-EDGE014

- 10" Round Spikes
- About 150 spikes per case
- · Sold in full cases only





PERMAEDGE PAVER EDGING

5 Gallon, 75 lb container RS-EDGE074

Designed to be mixed with water to use – 1 gallon water to 1 container product and is ideal for patios, pool decks and walkways. Better suited to open-graded aggregates, Perma Edge will outlast and out-perform traditional paver edging. It is quicker and easier to use, cutting installation time by 75%. Projects can be compacted and fine-graded immediately after installation.

• Coverage per container: yields approximately 25-30 lineal feet of edging per bucket

Wall Drainage



WALL DRAIN PRO

12 units/case, 63 cases/pallet Wall Drain Pro is a simpler, more effective wall drain than you've ever used before.

- Easy Installation
- · Aesthetically Pleasing
- Integral Component of Wall Construction
- Customizable Height
- Works with Block or Timber Walls

BLACK - RS-ACC086 GREY - RS-ACC123 TAN - RS-ACC122

X & T Slab Spacers






X&TSLABSPACERS

- 250 per bag
- X & T bagged separately
- X spacers 2" x 2" (RS-ACC237)
- T spacers 2" x 1" (RS-ACC236)

Unilock recommends using slab spacers when installing Arcana on an open grade surface. "T" spacers are needed for running bond patterns, "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.

Stainless Steel Fireplace Insert

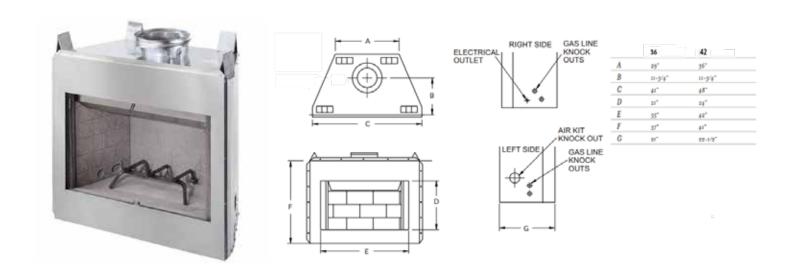

STAINLESS STEEL FIREPLACE INSERT

These outdoor wood burning fireplace is the perfect complement to any modern outdoor room. Each unit features realistic textured refractory panels, stylish brushed stainless steel face, stainless mesh spark screen and a solid stainless steel log grate.

Stocked in 36" (RS-FIR033) – Limited availability in 42" (RS-FIR034)

Each unit is packaged with 18" & 36" Flue Pipe & Termination Cap – Please also use codes RS-FIR041, RS-FIR042 & RS-FIR036-1 when ordering. Full Kit Weight: 254 lbs.

Unilock Pedestal System


TECHNICAL SPECIFICATIONS

Material	Recycled Polypropylene
Height Range	11/16" - 37-3/8" (17mm to 950mm)
Ultimate Compressive Strength ¹	P Series - 20 kN (4,496 lbs)*
	T Series - 10 kN (2,360 lbs)*
	M Series - 15 kN (3,372 lbs)*
Slope correction	0% to 8% @ 1% increment
Base Diameter	P Series - 6.81" (173 mm)
	T Series - 6.96" (177 mm)
	M Series - 8.26" (210 mm)
Spacer Tab Height	7/16" (11mm)
Spacer Tab Thickness	%" (3mm) [gap between pavers]
Biological / Chemical	Unaffected by molds and algae
Resistance	Good resistance to alkali and bitumen

1Detailed values for individual heights are given in the technical specification

MAX PEDESTAL ASSEMBLY OPTIONAL ACCESSORIES FLEMENTS Rubber shim Gap spacers -----Noise reduction shim. Can also be Gap spacers create spaces between divided into parts. paver tiles with 3 mm width. Self levelling head Self levelling head automatically reduces surface slope up to 7%. Units have graduating heights. Height coupler (use up to 3) Additional Height couplers can be Adjustment ring added to increase pedestal height. for height regulation Adjustment ring allows easy and smooth pedestal height adjustment. Wide pedestal base for better support. Bases have different heights depending on unit.

UNILOCK PEDESTAL HEIGHT CHART

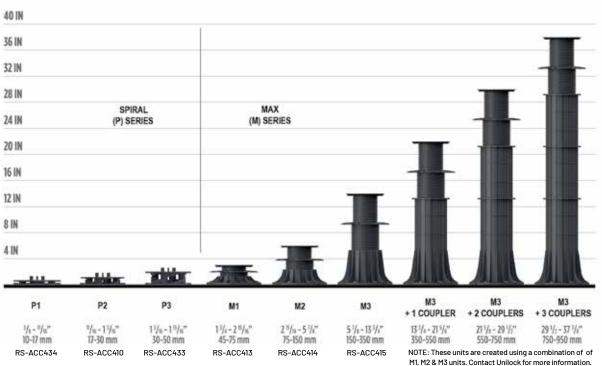

ACCESSORIES

	Moveable Gap Spacer Tabs 1/8" (3MM)	Self-leveling Head 6% MAX	Rubber Shim 1/16" (1.5MM)	Height Coupler 77/8"(200MM)	Slope Corrector 5/8" (16MM)	Drill Driver	Regulation Key	Wall Edge Clip 1/32" (0.7MM) SPECIAL ORDER
	25mm 3mm	RS-ACC417	146 mm 146 mm x 1.5 mm RS-ACC421	200 mm 200 mm 85 mm RS-ACC416	220 mm RS-ACC418	RS-ACC422	RS-ACC419	RS-ACC450
SPIRAL (P) SERIES	Included with MAX Pedestal	•	•	-	-	-	-	•
STANDARD (T) SERIES *	Included with MAX Pedestal	•	•	-	-	•	-	•
MAX (M) SERIES *	Included with MAX Pedestal	•	•	•	•	•	•	•

Accessory Quick Reference Guide

CLEANERS	
RS-CLN001	TECHNISEAL PROSERIES OIL & GREASE REMOVER - 1 QUART
RS-CLN002	TECHNISEAL PROSERIES EFFLORESENCE REMOVER - 1 GAL.
RS-CLN007	TECHNISEAL PROSERIES PAINT, TAR & RUBBER REMOVER - 1 QUART
RS-CLN012	TECHNISEAL PROSERIES RUST REMOVER PAVER CLEANER - 1 QUART
RS-CLN043	BP PRO ECO-NEW CONCENTRATE CLEANER - 1 GAL.
RS-CLN044	TECHNISEAL PROSERIES PAVER RESTORER - 1 GAL.
RS-CLN014	SUREBOND SURECLEAN - 1 GAL.
RS-CLN063	SUREBOND SURECLEAN - 5 GAL. * Special Order *
RS-CLN062	SUREBOND EFFLO OFF - 1 GAL.
RS-CLN065	SUREBOND STAIN AND RUST BUSTER - 1 QUART

WET LOOK SOLVENT-BASED SEALERS

WL4 TECHNISEAL WET LOOK - PAVER PROTECTOR GLOSS FINISHERS

1 GAL.: RS-SEAL001 (4 /CASE) - 5 GAL.: RS-SEAL073 (51 LBS/PAIL) - 55 GAL.: RS-SEAL003 (520 LBS/DRUM) * Special Order *

BP PRO WETLOOK STABILIZING

1 GAL.: RS-SEAL078 (4/CASE) - 5 GAL.: RS-SEAL079 (40LBS/PAIL) - 55 GAL.: RS-SEAL080 (418LBS/DRUM) * Special Order *

BP PRO WETLOOK SOLVENT BASED

1 GAL.: RS-SEAL049-1 — 5 GAL.; RS-SEAL050 (45LBS/PAIL) — 55 GAL. * Special Order *

SUREBOND SB-8700 WET-LOOK JOINT STABILIZING SEALER WITH ANTI-FUNGAL

1 GAL.: RS-SEAL151 (4/CASE) — 5 GAL.: RS-SEAL152 (45LBS/PAIL)

WL5 TECHNISEAL PROSERIES WET LOOK RECOATER PAVER PROTECTOR

1 GAL.: RS-SEAL113 (4 /CASE) - 5 GAL.: RS-SEAL096 (50LBS/PAIL) - 55 GAL.: RS-SEAL175 (560LBS/DRUM) * Special Order *

WATERBASED SEALERS AND ACCESSORIES

BP PRO NATURAL JOINT STABILIZING SEALER

1 GAL.: RS-SEAL045 - 5 GAL.: RS-SEAL046

BP PRO PAVER ENHANCER STABILIZING SEALER

1 GAL.: RS-SEAL042 - 5 GAL.: RS-SEAL043 - 55 GAL.: RS-SEAL044 * Special Order *

SUREBOND SB-1300 JOINT SAND STABILIZER SEALER

1 GAL.: RS-SEAL037-2 — 5 GAL.: RS-SEAL036 — 55 GAL.: RS-SEAL038 * Special Order *

ADHESIVE & CAULK	
RS-ADH009-1	SB-10 ADHESIVE 100Z. (12/CASE - 140C./SKID)
RS-ADH015-1	SB-10 ADHESIVE 28OZ. (12/CASE - 60C./SKID)
RS-ADH039	XP GATOR BLOCK ADHESIVE 10 OZ. (12/CASE - 90C./SKID)
RS-ADH040	XP GATOR BLOCK ADHESIVE 28 OZ. (12/CASE - 60C./SKID)
RS-ADH055	TECHNISEAL STICKY STONE 20 OZ. SAUSAGE
RS-TOOL557	TECHNISEAL GUN (FOR STICKY STONE)
RS-ADH048	TECHNISEAL STRUCTURE BOND 24 OZ. CANISTER
RS-TOOL378	TECHNISEAL GUN II (FOR STRUCTURE BOND)

SANDS

SEK JOINTING SAND 50# BAGS (56 BAGS/SKID)

TAN: RS-SAND001 - 1 GREY: RS-SAND140 BLACK: RS-SAND186

TECHNISEAL PROSERIES SMARTSAND - POLYMERIC SAND - 50# BAGS (56 BAGS/SKID)

TAN: RS-SAND169 - GREY: RS-SAND168

TECHNISEAL PROSERIES HP NEXTGEL - POLYMERIC SAND - 50# BAGS (56 BAGS/SKID)

PRAIRIE GREY: RS-SAND130 - PRAIRIE TAN: RS-SAND131

SEK - POLYSWEEP SAND 50# BAGS (56 BAGS/SKID)

TAN: RS-SAND045 - GRAY: RS-SAND046 - BLACK: RS-SAND184

SEK - X-TREME WIDE JOINT SAND (56 BAGS/SKID)

TAN/RUSSET BROWN: RS-SAND111 — GREY RS-SAND117

ALLIANCE - SUPERSAND HP 50# BAGS (56 BAGS/SKID)

BEIGE: RS-SAND078 — SLATE GREY: RS-SAND080

ALLIANCE - GATOR DUST BOND 50# BAGS (56 BAGS/SKID)

SAHARA BEIGE: RS-SAND072 - STONE GREY: RS-SAND073

ALLIANCE - GATOR MAXX BOND 50# BAGS (56 BAGS/SKID)

BEIGE: RS-SAND074 - SLATE GREY: RS-SAND075

ALLIANCE - EUROSTONE BOND 50# BAGS (56 BAGS/SKID)

SLATE GREY: RS-SAND095

UNILOCK EASY PRO PREMIXED JOINT STABILIZING COMPOUND 33# CONTAINER (64 PAILS/SKID)

TAN: RS-SAND066 - BASALT BLACK: RS-SAND068 - STONE GREY: RS-SAND069

ALLIANCE SUPER SAND G2 - 50# BAGS (56 BAGS/SKID)

BEIGE: RS-SAND156 - SLATE GREY: RS-SAND157

ALLIANCE MAXX G2 - 50# BAGS (56 BAGS/SKID)

BEIGE: RS-SAND158 - SLATE GREY: RS-SAND159 - DIAMOND BLACK: RS-SAND160 - IVORY RS-SAND161

ALLIANCE NITRO SAND - 40# BUCKET (48 BUCKETS/SKID)

BEIGE: RS-SAND196 — GREY: RS-SAND197 - BLACK: RS-SAND198

^{*} ITEMS ARE SPECIAL ORDER

Accessory Quick Reference Guide

PERMEABLE GRANITE CHIPS - ASTM NO. 9 (2-5mm)

SEK PERM CHIPS - 50# BAGS ECLIPSE BLACK: RS-AGG035 — STORMY GREY

SEK PERM CHIPS - 2500# SUPERSAK

ECLIPSE BLACK: RS-AGG036 — STORMY GREY: RS-AGG041 — SATURN TAN: RS-AGG039 — Special Order *

ALLIANCE GATOR AQUA ROCK - GRANITE GREY 50#: RS-AGG032 — 2200# BAG: RS-AGG033

00111107100002	223011 27 101 110 7 100000
GEOTEXTILES & DRA	INAGE SYSTEMS
RS-ACC086	WALL DRAIN PRO BLACK (12/CASE - 63C./SKID) - TAN - RS-ACC122, GREY - RS-ACC123
RS-FAB101	STRATA GRID SGU60
RS-FAB001	6OZ. NONWOVEN FILTER FABRIC
RS-FAB070	GATOR GRID 30-30 - 4'X50' (12 ROLLS/CASE; 60 ROLLS/SKID)
RS-FAB071	GATOR GRID 30-30 - 6'X50' (40 ROLLS/SKID) Special Order *
RS-FAB072	GATOR GRID 30-30 - 6'X150' (25 ROLLS/SKID)
RS-FAB040	GATOR FABRIC NON-WOVEN 3.5 6'X100' (30 ROLLS/SKID) Special Order *
RS-FAB041	GATOR FABRIC NON-WOVEN 3.5 6'X300' (16 ROLLS/SKID) Special Order *
RS-FAB043	GATOR FABRIC NON-WOVEN 4.4 - 3'X100' - 6 ROLLS/CASE (24 ROLLS/SKID) Special Order Minimum Case Purchase
RS-FAB044	GATOR FABRIC NON-WOVEN 4.4 - 4'X100' - 6 ROLLS/CASE (16 ROLLS/SKID) Minimum Case Purchase
RS-FAB046	GATOR FABRIC NON-WOVEN 4.4 - 6'X100' - 30 ROLLS/SKID Minimum Case Purchase
RS-FAB044	GATOR FABRIC NON-WOVEN 4.4 - 4'X100' - 6 ROLLS/CASE (16 ROLLS/SKID) Minimum Case Purchase
RS-FAB047	GATOR FABRIC NON-WOVEN 4.4 - 6'X300' - 16 ROLLS/SKID Minimum Case Purchase
RS-FAB054	GATOR FABRIC POLYSPUN 20 - 3'X50' - 16 ROLLS/CASE (64 ROLLS/SKID) Special Order Minimum Case Purchase
RS-FAB055	GATOR FABRIC POLYSPUN 20 - 3'X100' - 9 ROLLS/CASE (36 ROLLS/SKID) Special Order Minimum Case Purchase
RS-FAB057	GATOR FABRIC POLYSPUN 20 - 4'X100' - 9 ROLLS/CASE (36 ROLLS/SKID) Special Order Minimum Case Purchase
RS-FAB058	GATOR FABRIC POLYSPUN 20 - 6'X100' - 30 ROLLS/SKID Special Order Minimum Case Purchase
EDGING & SPIKES	
RS-EDGE001	SEK - SNAP EDGE - 8 FT PCS. (24PCS/Bnd 28Bnd/SKID)
RS-EDGE017	LOW PROFILE EDGE (APPROX. 150 PER BUNDLE/672 PER PALLET)

RS-EDGE001	SEK - SNAP EDGE - 8 FT PCS. (24PCS/Bnd 28Bnd/SKID)
RS-EDGE017	LOW PROFILE EDGE (APPROX. 150 PER BUNDLE/672 PER PALLET)
RS-EDGE033	SEK - SNAP EDGE - PERMEABLE 8FT PCS.
RS-EDGE014	10" SPIKES (APPROX. 150/BOX)

UNICARE DRIVEGRID™ SYSTEM

RS-FAB075 13.1' x 120' Roll - 1572 Sq. Ft.

U-CARA	CABINET	& RAIL S	YSTEM

RS-UCARA000001	URS U-CARA 8" RAIL 10/PACK
RS-UCARA000002	URS ALIGNMNT BARS 39"(10/PACK)
RS-UCARA000005	URS U-CARA HEIGHT CONVERSION (UL-HCK)
RS-UCARA000006	URS U-CARA HEIGHT CONVERSION KIT-OS (UL-HCK-OS)
RS-UCARA000009	URS U-CARA FIREPLACE (UL-FIR)
RS-UCARA000010	URS U-CARA FIREPLACE MANTLE (UL-FIR-M)
RS-UCARA000014	URS U-CARA HEIGHT CONV CORNER CAB-OS (UL-HCK-CC-OS)
RS-UCARA000015	URS U-CARAHEIGHT CONVERSION CORNER CABINTE (UL-HCK-CC)
RS-UCARA000016	URS U-CARA FIRPLACE MANTLE WIDE UNIT (UL-FIR-MW)
RS-UCARA000017	URS U-CARA FIRPLACE CHIMNEY UNIT (UL-FIR-CH)
RS-UCARA000018	URS U-CARA FIRPLACE CHIMNEY WIDE UNIT (UL-FIR-CH-MW)
RS-UCARA000019	URS U-CARA FIRPLACE RETURN (UL-FIR-RTN)
RS-UCARA000020	URS U-CARA FIREPLACE RETURN OVERSIZED (UL-FLR-RTN-OS)
RS-UCARA001000	URS UNIVERSAL GRILL CABINET (UL-GC)
RS-UCARA002000	URS BASE CABINET (UL-GC)
RS-UCARA003000	URS CORNER CABINET 27.5" X 27.5" (UL-CC)
RS-UCARA003001	URS CRNR CABINT 27.5" X 36.5" (UL-CCOS)
RS-UCARA003002	URS CORNER CABINET PANEL (UL-CCBP)
RS-UCARA004000	URS END CLAD KIT 27.5" (UL-ECK)
RS-UCARA004001	URS END CLAD KIT 36.5" OS (UL-ECKOS)
RS-UCARA005000	URS BACKSPLASH-GRILL/BASE UNIT 64.5" (UL-BS)
RS-UCARA005001	URS BACKSPLASH CORNER CABINET (ULS-BSCC)
RS-UCARA005002	URS BACKSPLASH CORNER CABNT OS (ULS-BSCCOS)
RS-UCARA006000	URS UCS STNLSS DBL ACCESS DOORS27" (UL-DD)
RS-UCARA007000	URS PILLAR UNIT (ULPU)

^{*} ITEMS ARE SPECIAL ORDER

Accessory Quick Reference Guide continued

X & T SPACERS	
RS-ACC237	X SPACERS - 2" X 2"
RS-ACC236	T SPACERS - 2" X 1"
MISCELLANEOUS TOOL	.s
RS-TOOL009	STEEL TAMPER 10x10
RS-TOOL027	MIGHTY TEE LEVEL
RS-TOOL041	TECHNISEAL SPLIT FOAM ROLLER
RS-TOOL052	CHISEL 4"
RS-TOOL104	29oz. CAULK GUN
RS-TOOL018	14oz. CAULK GUN
RS-TOOL112	HAMMER 4lbs
RS-TOOL143	PAVERSAVER URETHANE MAT KIT
RS-TOOL144	PROBST PAVER EXTRACTOR
RS-TOOL146-1	PAVER EXTRACTOR REPLACEMENT TEETH
RS-TOOL177	H.D. PLASTIC BRICK GUARD 36"
RS-TOOL181	22" SQUEEGEE
RS-TOOL184	SNIP STRAIGHT & COMB
RS-TOOL187	RATCHET STRAP
RS-TOOL318	PAVEMOR PAVER PLACER-PM-3 AIR
RS-TOOL319	PAVEMOR PAVER PLACER-PM-1 AIR
RS-TOOL365	TECHNISEAL EXACT DILUTION SPRAYER
RS-TOOL378	TECHNISEAL STRUCTUREBOND GUN II

Calculations

AREA OF A CIRCLE

Radius (in.)	18	21	24	27	30	33	36	39	42	45	48	51	54	57
Radius (ft.)	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.235	4.50	4.75
Square Feet	7.07	9.62	12.56	15.90	19.63	23.75	28.26	33.17	38.47	44.16	50.24	56.72	63.59	70.85
Circumference (in.)	113.04	131.88	150.72	169.56	188.40	207.24	226.08	244.92	263.76	282.60	301.44	320.28	399.12	357.96
Circumference (Ft.)	9.42	10.99	12.56	14.13	15.70	17.27	18.84	20.41	21.98	23.55	25.12	26.69	28.26	29.83

Circumference = 6.28 x Radius

AREA CONVERSION CHART

Square Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Meter	0.09	0.19	0.28	0.39	0.46	0.56	0.65	0.74	0.84	0.93	1.02	1.11	1.21	1.30
Square Meter	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Feet	10.76	21.53	32.29	43.06	53.82	64.58	75.35	86.11	96.88	107.64	118.40	129.17	139.93	150.69
Cubic Yard	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Cubic Feet	27	54	81	108	135	162	189	216	243	270	297	324	351	378

Area Square = Length x Width

Area Triangle = 1/2 Base x Height

Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course

Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	28	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course

Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

Sealer Best Practices

- The paver surface should be **clean** and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be free of any visible efflorescence.
- If pavers have been sealed before, make sure to reseal with compatible product.
- Surface must be dry (48 hours without precipitation) and warm to the touch (morning).
- Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between **50 degrees to 80 degrees** with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the same application method from start to finish.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8" below** the surface on the non-beveled or tumbled paver surface.
- Always test the product on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- Read application information as each sealer can be applied differently.
- Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers,
 watering cans or paint trays. Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- · Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- Send your most experienced worker to do sealing projects.

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- Do not set pavers in limestone screenings. This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure pavers are clean of all construction dust. Residual construction dust will haze pavers!
- Compact pavers into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. (Read Directions)
- Don't rush polysand installation.
- Paver area must be completely dry.
- Lay bags of polysand over paver area. Stage bags in areas of coverage. Example: one bag for 60 square feet.
- Do not over sweep sand. Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to remove any excess sand from the paver surface.
- Use a **leaf blower** remove any sand or binder residue.
- Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!
- Always start watering at the bottom of the slope.
- Always start watering in **controlled areas** per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, clean surface by removing excess water with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts Always be aware of the weather when installing poly sand. (Temperature and setting time ratings differ between products.)
- · Refer to all manufacturers websites for installation videos.

Terms and Conditions of Sale

STANDARD TERMS

- 1. All orders are accepted subject to prevailing state or other taxes, and subject to applicable skid charges and the cost of freight applying at the time of shipment. Confirm prices at time of order as they are subject to change.
- 2. The acceptance by the seller of an order shall constitute a binding contract of purchase and sale, in accordance with the terms set out in this agreement.
- 3. These terms and conditions, together with the purchase order, form the complete contract, and there are no representations, warranties, or conditions expressed or implied, affecting this contract, other than as contained herein.
- 4. All sales are made in accordance with the seller's samples, which the purchaser has seen and approved. No guarantee of exact color shades is made.
- 5. Use of any delivered materials by or on behalf of the purchaser shall be deemed to constitute acceptance of the materials by the purchaser.
- 6. Excessive defective material picked up or delivered to the purchaser will be replaced free of charge if a claim is made within five days. Free replacement will be the extent of the seller's warranty. Any such claim will not constitute a reason for delaying payment. All other claims must be submitted within 30 days of purchase.
- 7. Unsuitable or unsatisfactory materials must be available for inspection by the seller to entitle the purchaser to any adjustment or credit. Skid returns will be posted to account next business day.
- 8. No materials may be returned for credit except with the written consent of the seller, whether such materials were ordered in excess of the purchaser's requirement, by mistake, or otherwise. Where the seller agrees to accept the return of goods, these goods are subject to freight charges and a restocking charge of 20% of their value. All goods must be returned in their original packaging. ACCESSORIES, SECTIONS AND OPENED MATERIAL ARE NONRETURNABLE FOR ANY REASON.
- 9. Seller does not accept responsibility for delays in deliveries due to fire, flood, strikes, or any other condition or contingencies beyond its control.
- 10. The purchaser is responsible for installation of the materials on the job site, and the seller has no responsibility in this regard.
- 11. All approved credit accounts are payable within thirty days of invoice. After 30 days, interest will be charged at 1.5%* per month (A.P.R.19.65%*), Calculated monthly on the balance owing at the beginning of the period. If purchaser defaults in the payment of any portion of amounts due on this account, the entire remaining unpaid balance shall, at the option of the seller, immediately become due and payable with collection costs incurred.
- 12. Skid deposits are non-refundable with 2 or more broken top boards or one main stringer board. If you have skids loaded onto your vehicle or receive a delivery with skids in this condition, you must have the Unilock representative (loader or truck driver) note the quantity on the shipping document paperwork. The responsibility of the return of empty skids for credit rests with the purchaser. There will be a net usage fee for all skids accepted for return. Skids picked up by Unilock in conjunction with a delivery by a Unilock truck will not be credited until returned to Unilock and sorted and verified by Unilock. Normal delivery charges will apply to requested skid pick-ups which do not coincide with a Unilock delivery to the site.
- 13. A sectioning charge of \$30.00 is applied to all items where bundles are split.

GENERAL TERMS

- 1. All prices are F.O.B. Aurora, IL, Marengo, IL or Elkhorn, WI. Please reference the freight price chart in the Product Resource Guide. Contact Unilock for Kansas rates.
- 2. All C.O.D. orders must be paid by certified check, cash, or prior approved check. Cashier's checks are encouraged over cash due to COVID-19.
- 3. Contact Unilock for shipping schedules, rates, and conditions, and any fuel surcharges.
- 4. Configurations may vary from time to time due to mold design changes.
- 5. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80.00 per hour or fraction thereof. Similarly, delays incurred on partial delivery (1-7 bundles) in excess of one half hour will be billed to the purchaser at the same rate.
- 6. There is a mandatory \$22.00 SKID DEPOSIT CHARGE (Refer to your current year Product Resource Guide for all mandatory skids which are subject to change based on manufacturing). Standard skid deposits are for the following skids: 4-WAY, SKID26X40HD, SKID2640HD, SKID36X40HD, SKID36X, SKID36X, SKID30LID46X36, SKID30LID46X36 and SKID26X34HDPKGNY, which is refundable when returned in good condition (\$1.00 Usage fee will be charged). Skid returns will be posted to account next business day.
- 7. There is a mandatory \$28.00 SKID DEPOSIT CHARGE for all PREMIUM-1, PREMIUM-2, PREMIUM-3 and PREMIUM-4 skids. Premium skids are mandatory packaged skids for all STONEMARK™ and Ledgestone™ product pallets, which is refundable when returned in good condition (\$1.00 Usage fee will be charged). Skid returns will be posted to account next business day.
- 8. There is a mandatory \$32.00 SKID DEPOSIT CHARGE for all SKIDLTD (Refer to your current year Product Resource Guide for all mandatory skids which are subject to change based on manufacturing). SKIDLTD skid deposits are for all Canadian Products, which are refundable when returned in good condition (\$1.00 Usage fee will be charged). Skid returns will be posted to account next business day.

CUSTOM ORDERS

- 1. Custom Orders refer to nonstandard-inventoried items. Deposits of up to 100% of the order value (minimum of 20%) will be required. Minimum quantities apply on custom orders. Custom orders may be subject to a [500] sq.ft. over-run charge. Purchase orders as well as a signed special order release form will be required for custom material. Custom Orders will not be accepted for return.
- 2. All custom produced product must be shipped within 30 days of production. After 30 days all custom produced material will be subject to a storage fee of \$5.00 per pallet per month. Please contact your Territory Manager for more information.

2022 Freight Rates

# of Bundles	Boom	Princeton		
1 to 7	\$380.00	\$440.00		
8 to 14	\$520.00	\$605.00		

Based on the US National Average for the Midwest Rates

Rates are based on a 0-50 mile radius from Aurora, IL, Marengo, IL & Elkhorn, WI facilities. Please contact the shipping department for all other rates and any questions concerning delivery. Approximately 14 bundles or 43,000 pounds per truckload. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80 per hour or a fraction thereof. Partial load deliveries in excess of one-half hour will be billed to the purchaser at the same rate.

Flat Surcharge
\$27.00
\$42.00
\$51.00
\$64.00
\$78 .00
\$93.00
\$106.00

Fuel Surcharge for 0-50 miles only

At Least	Less Than	Fuel Surcharge		
\$2.30	\$2.79	5%		
\$2.80	\$3.29	10%		
\$3.30	\$3.79	15%		
\$3.80	\$4.29	20%		
\$4.30	\$4.79	25%		
\$4.80	\$5.29	30%		
\$5.30	\$5.79	35%		

Fuel Surcharge for deliveries over 50 miles

NOTE: Rates are based on current economic conditions and are subject to fuel surcharges, which will be based on the U.S. National Average Midwest rate of diesel fuel, calculated weekly. When the average price of fuel rises (or drops), the surcharge will take effect the following Monday. These rates can be located at www.eia.gov/petroleum/gasdiesel/.

Important Notes

SPECIAL ORDER PRODUCTS

Products listed as "Special Order" are not currently inventoried and may require additional lead times for manufacturing (or transfer from other Unilock locations). Prior to bidding or quoting projects, confirm Special Order unit pricing and minimum quantity requirements. A signed "Special Order Release Form" must be submitted prior to manufacturing and all material must begin shipping within 30 days of manufacturing date. Any Special Order products remaining at Unilock after 30 days will be subjected to a storage fee of \$5.00 per pallet per month. (Maximum storage is 3 months) All quantities listed on the Special Order Release Form must ship and be paid in full. Please contact your Territory Manager for more information.

Important Notice

1. EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Arcana Courtstone® Copthorne® II Campo® Richcliff® Series™ Town Hall® Tribeca Cobble Umbriano™

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

2. IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Please refer to each individual manufacturer for full instructions prior to install.

Notes			



INCREASE SALES BY OFFERING A PAYMENT OPTIONS PLAN... ON EVERY PROJECT!

Ultimately, offering payment options inspires more homeowners to complete the project they truly want without delay. When homeowners learn upfront about their payment options, they are less anxious about the potential for a large price tag during the process. The positive customer experience due to payment arrangement flexibility often results in more and better referrals, creating a cycle of success that's a win-win for everyone.

SCAN THE QR CODE FOR MORE INFORMATION OR TO CONNECT WITH A UNILOCK TERRITORY MANAGER FOR MORE INFORMATION.



IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano* is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2022 Hengestone Holdings, Inc.

UNILOCK® QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. The Unilock warranty also does not cover deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI

(Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi. org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most deicing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color.

Note: Unilock Natural Stone variations

are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult

to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver	22	S	~				
Anchorlock™	23	S	~		•		
Arcana™	24	S	•				
Artline™	25	М	~				
Beacon Hill™ Flagstone	28	F	•				
Beacon Hill™ Smooth	32	SM	~				
Bristol Valley®	34	F	•				
Brussels Block®	38	W	~	·			•
Copthorne®	39	Т	•	•			✓
Courtstone®	40	С	~	✓			~
Eco-Line®	41	S	•	•	•	•	~
Eco-Optiloc™	42	S	~	✓	•	•	
Eco-Priora™	43	М	•	•	•	•	
Eco-Promenade™	44	М	~	·	•	•	
Hex Paver	45	S	~	•			
Hollandstone™	46	S	✓	•	✓		~
Holland Premier®	48	S	~	·			~
Mattoni™	49	Т	✓	✓	•		•
Natural Stone	50	SM	~				
Nordic Cobble™	56	WS	✓	•	✓		~
Optiloc°	57	S	~	•	•		
Porcelain	58	SM	✓				
Promenade® Paver	61	М	~	•	✓		✓
Richcliff®	62	F	✓	•			✓
Series™	64	WS	~	•	•	√ (80mm)	~
Skyline [™]	67	S	✓				
Soreno™	68	S	~				
Town Hall [®]	69	С	•	•	•	•	~
Treo [®] Smooth	70	SM	~	•		•	~
Tribeca Cobble	71	Т	~	•	•	•	✓
Turfstone™	72	S		•		•	
Umbriano™	73	SZ	~	✓ (80mm)	✓ (80mm)	✓ (80mm)	~
Westport™	75	F	~	✓			✓

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional System™	76	W	~		~	~	•
DuraHold®	77	SM	~	✓	~	~	~
Estate Wall™	78	SP/W	~	~	~	•	~
Lineo™DimensionalStone	79	SM	~		~	✓	~
Olde Quarry™	80	W	~	~	~	✓	~
Pisa2°	81	SP	~	✓	✓	✓	~
SienaEdge®	82	F		~	~		
SienaStone®	83	SP		✓	✓		
U-Cara®	85	SD	~	~	~	~	~

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed

This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

New for 2022 UNILOCK HOW-TO GUIDES

Be sure to check out our instructional manuals complete with not only step-by-step instructions but equipment and supply lists, detailed cross sections and diagrams, as well as full color 3D renderings.

TOPICS INCLUDED:

- Patio on Grade
- Paver Driveway
- Pool Coping
- Retaining Wall
- Outdoor Kitchen
- Many more coming soon!

BE SURE TO CHECK BACK REGULARLY FOR ADDITIONAL GUIDES.



PAVER INSTALLATION



VERTICAL FEATURES



WALL INSTALLATION



SCAN THE QR CODES TO VIEW OR DOWNLOAD OUR NEW HOW-TO GUIDES

Let's **BUILD YOUR** BUSINESS together.

Being a hardscape contractor is tough work. No one gets that better than Unilock. We've been supporting hardscaping professionals since 1973, longer than any other company in the industry. Getting our boots dirty is part of our promise to support our Unilock contractors in any way we can. You're never alone - not even on the project site.

CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO CONNECT WITH YOUR LOCAL TERRITORY MANAGER



BOSTON

(508) 278-4536

CHICAGO

(630) 892-9191

MILWAUKEE

(262)742-3890

KANSAS

(913) 417-7985

MICHIGAN

(248) 437-7037

(513) 202-0219

WNY&CNY (330) 927-4000

OHIO/WESTERN PA/

NEW YORK

(845) 278-6700

MID-ATLANTIC

(202)798-2060

ONTARIO

(416) 646-9000

UNILOCK.COM | 1-800-UNILOCK

©2022 Hengestone Holdings, Inc.