



**HIGH  
FORMAT®**



**TECHNICAL GUIDE**  
**1ST EDITION**

# CONTENTS

## 3 MATERIALS

## 4 WALLS

5	GENERAL INFORMATION
10	OUTCROPPING
30	GRAND LEDGE™
34	BELVEDERE®
41	KODAH®
47	CLAREMONT®
50	DIMENSIONAL

## 53 SLABS & PAVERS

54	GENERAL INFORMATION
57	GAUGE SELECT
60	MID-CENTURY
63	MONTROSE
65	GRAND FLAGSTONE
69	DIMENSIONAL FLAGSTONE
72	NEW MISSION
75	AMARO®
76	SUPERIOR STEPPERS

## 77 STEPS

78	GENERAL INFORMATION
79	IRREGULAR
81	DIMENSIONAL

## 82 FIRE FEATURES

83	GENERAL INFORMATION
84	BELVEDERE® FIRE PIT
86	DIMENSIONAL FIRE PIT
87	KODAH® FIRE PIT
88	BELVEDERE® FIREPLACE

## 93 COPING & CAPS

94	DIMENSIONAL COPING
95	BELVEDERE® COPING
96	COLUMN CAPS

## 98 WARRANTY

### Notes:

- Technical information for our Natural Stone products can be found on our website.
- Written specifications for products are available on our website.

# MATERIALS

## WETCAST

HIGH FORMAT® products are primarily made of concrete utilizing our wetcast production system. Wetcast concrete offers benefits including:



- Detailed, natural looking textures
- Seamless blending of colors throughout
- Long-term structural integrity

## WETCAST WITH VIBRALOCK®

VIBRALOCK® is an integrated surface technology that is directly incorporated into the production process of many of our slab and paver products to deliver benefits including:



- A harder surface with greater resistance to abrasion
- More vibrant and enduring color
- Increased resistance to efflorescence

## TEKTRAMAT®

TEKTRAMAT® is our proprietary material based around ultra high performance concrete technology (UHPC). Products made from this material offer benefits including:



- Efficient installation resulting from large yet thinly formatted shapes
- Ultra-realistic replication of fine detail
- Unsurpassed durability including salt proof surface

# WALLS

GENERAL INFORMATION

OUTCROPPING

GRAND LEDGE™

BELVEDERE®

KODAH®

CLAREMONT®

DIMENSIONAL



# PRE-CONSTRUCTION CHECKLIST

Before you start construction, take the time to complete the necessary planning and preparation. This process will keep your project running efficiently and will aid in completing a quality installation.

Make sure to address the following:

### SAFETY

Your safety program should address items such as personal protective equipment, maintaining safe slopes and excavations, fall protection, rigging and lifting, as well as any other relevant safety precautions.

### ENGINEERING AND PERMITS

Obtain the necessary engineering design and permits for your project. The soils for foundation and wall backfill should be properly evaluated by a trained professional. Unsuitable soils should be removed and replaced as recommended.

**Note: This installation guide is intended to supplement a detailed, site-specific wall design prepared by a Professional Engineer. The construction documents for your project supersedes any recommendations presented here.**

### REVIEW THE PROJECT PLANS

Take the time to review and understand the project plans and specifications. Make sure you understand the detailed design for the project before starting construction. A pre-construction meeting with the wall designer, construction inspector, wall contractor, and owner or representative is recommended. Don't be afraid to ask questions.

### CONSTRUCTION PLANNING

Develop a plan to coordinate construction activities (material delivery/storage, equipment access, etc.) on your site. Make sure your plan specifically addresses how to control surface water during construction.

### UTILITY LOCATION

Make sure to have underground utilities located and marked on the ground before starting any construction.

Call 8-1-1 or go online to call811.com to schedule utility marking for your project site.

### MATERIAL STAGING

Store retaining wall blocks in a location close to the proposed wall. Blocks should be kept clean and mud free. Blocks should also be stored in a location which will minimize the amount of handling on the project site.

Store geogrid in a clean, dry location close to the proposed wall site. Keep the geogrid covered or in the shade until installation to avoid exposure to direct sunlight.

### EQUIPMENT

Make sure you have the proper equipment to handle retaining wall blocks and pallets on the construction site (Note: A specially designed Lifting Device is required for the installation of Outcropping and Grand Ledge™ blocks).

Hand operated equipment used in wall construction should include shovels, rake, 2' (600 mm) level, 4' (1.2 m) level, broom, hammer, chisel, tape measure, string, spray paint, laser level, pry bar, concrete saw and a walk behind vibratory plate compactor capable of delivering a minimum of 2000 lb (9 kN) centrifugal force.

Personal protective equipment should include appropriate clothing, steel toe boots, eye protection, respiratory protection, hard hat, gloves, hearing protection, fall protection, rigging, and other items as necessary to insure a safe working environment.

## INSTALLATION GUIDE

### BASIC RETAINING WALL INSTALLATION NOTES FOR:

- Outcropping
- Grand Ledge™
- Belvedere®
- Kodah®
- Dimensional
- Claremont®

Refer to product pages for specific information and details pertaining to individual products.

### BASE PREPARATION


Proper base preparation is a critical element in the construction of your retaining wall. Not only is it important to provide a stable foundation for the wall, but a properly prepared base will greatly increase the speed and efficiency of your wall installation.

Proper base preparation starts with the sub-grade soils (soils below the leveling pad). Existing soils must be removed to the bottom of the leveling pad elevation for the retaining wall. A typical wall requires excavation of at least 12" (300 mm). This will provide 6" (150 mm) for the leveling pad and 6" (150 mm) of minimum bury of the blocks. (Note: excavation and bury depth will vary by product type and design. Please see project plans or product specific information for further information.) Remove all topsoil, organic, or otherwise unsuitable soil and replace with compacted granular soil. The minimum width of the leveling pad should be 18" (465 mm) wider than the width of the block. This will provide 6" (150 mm) in front of and 12" (300 mm) behind the bottom block.

Once excavated, the sub-grade soil should be compacted to a minimum of 95% maximum density as determined by a standard proctor test (ASTM D698). At this point the soil should be firm, dry and free of topsoil debris, stones, roots, etc. Consult a soils engineer if in doubt. Any unsuitable material shall be excavated and replaced as directed by the engineer.

### LEVELING PAD

Base preparation continues with proper leveling pad construction. An open graded (free-draining) crushed stone leveling pad is typically used for retaining walls. Walls can also be designed with a dense-graded crushed stone or concrete leveling pad. The choice of which type of leveling pad to use is made by the wall designer and depends on several factors including the bearing capacity of the native soil, location of the drain outlet, conditions at the base of the wall, and any other special considerations for the wall.

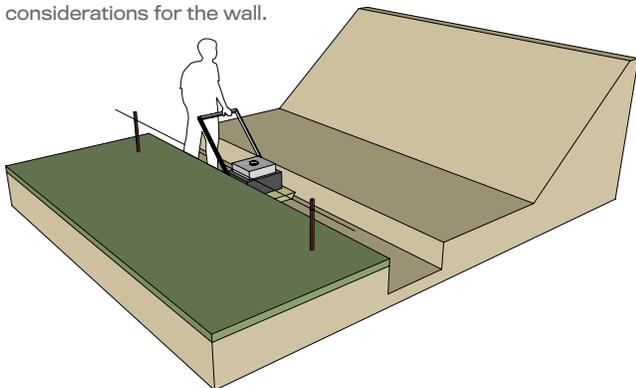

**FOR THE MOST NATURAL APPEARANCE, MIX AND INSTALL PRODUCTS FROM MULTIPLE PALLETS SIMULTANEOUSLY. THIS WILL CREATE A MORE BLENDED, NATURAL LOOK.**

The leveling pad material should be placed and compacted to provide a uniform, level foundation on which to construct the retaining wall. Proper elevation can be established with a laser level or transit. Check for level both parallel and perpendicular to the wall.


Place and compact leveling pad material as specified in the wall design. If crushed stone is used, place the stone in uniform loose lifts a maximum of 6" (150 mm) thick. Lift sizes are relative to size of the compactor being used. Compact the stone with a minimum of three passes with a 24" (600 mm) wide, walk-behind, vibrating plate compactor

**NOTE: Do NOT place a thin layer of sand between the leveling pad and bottom block. This layer will reduce the sliding resistance between the leveling pad and bottom block, as well as reduce the drainage capacity of the foundation stone.**

### DRAIN

A drain is installed in the lowest part of the open graded (free-draining) stone behind the retaining wall. If an open graded crushed stone leveling pad is used, the drain is installed on the bottom of the crushed stone leveling pad. If a dense graded crushed stone leveling pad is used, the drain is installed immediately on top of the dense graded stone.

Typically, a 4" (100 mm) diameter perforated pipe is used. Daylight the drain pipe at the ends and/or through the face of the wall every 50' to allow for drainage. The pipe can also outlet into a nearby drainage ditch or catch basin. Because water can flow both ways through the drain pipe, connection to a catch basin or active storm sewer should only be made under the direction of a Professional Engineer.

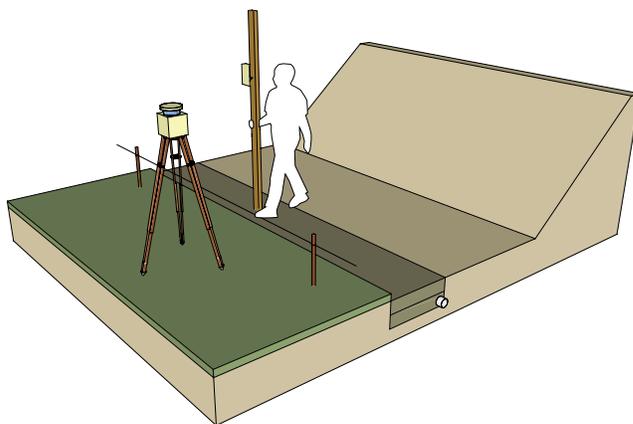

## GENERAL INFORMATION

### SETTING THE BOTTOM COURSE OF BLOCKS

Proper placement of the bottom course of wall stones is critical in determining the overall appearance and integrity of the finished project. Take extra time on this step and the rest of the project will go smoothly. At this point you need to determine the best point of origin for the wall. If you have a fixed point, such as a building corner or a 90° corner, you will want to start the wall from that point and work your way out. This will minimize cutting of blocks. If there are no fixed points, start the wall at the lowest design elevation, as it is easier to step the base up than it is to step the base down.

Properly mark the location of the retaining wall. A string line or offset stakes are typically used to establish horizontal and vertical alignment.

Where applicable, remove the bottom lip from the back edge of the blocks with a hammer and chisel (bottom course of blocks only) so the blocks will lie flat on the leveling pad. (This applies to Outcropping and Grand Ledge™ walls.)

Place a complete row of blocks on the prepared leveling pad. Blocks should be placed tight together horizontally.


Check all blocks for level from front to back and side to side as they are placed. Place and compact fill in front of the bottom row of blocks to help hold them in place. Compaction should be to 95% maximum density as determined by a standard proctor test (ASTM D698).

Place open-graded crushed stone, between the blocks (when applicable), and at least 12" (300 mm) behind the wall. A stone meeting the gradation requirements of ASTM No. 57 with no material passing the No. 200 sieve is preferred. Place the stone in uniform loose lifts a maximum of 6" (150 mm) thick. Fully consolidate the stone. Carefully hand tamp the stone within 12" (300 mm) of the blocks.

Place non-woven geotextile fabric between the drainstone and the remaining backfill material if specified.

Backfill behind the drainstone with material as specified in the project design. Place the material in loose lifts as specified, but not to exceed 6" (150 mm) maximum. Granular backfill shall be compacted to a minimum of 95% maximum density as determined by a standard proctor test (ASTM D698). Do not use any organic, topsoil, frozen, soft, wet, or loose soils when backfilling the wall.

Re-check all units for level and alignment and sweep the top of each course of blocks clean before starting construction of the next course.

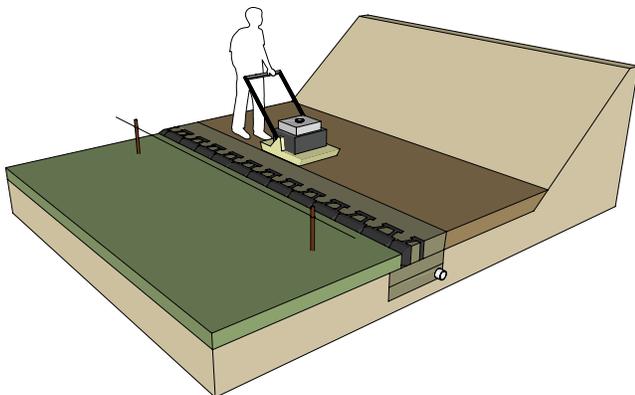

### SETTING THE UPPER COURSES OF BLOCKS

Placing the next course of blocks is similar to placing the first course. Blocks should be placed so that vertical joints are broken whenever possible.

Blocks should be installed with their sides pushed tight. Push blocks from Outcropping and Grand Ledge™ collections forward until the lip on the back of the block comes in full contact with the blocks below. Make sure that no stones get caught or wedged between the lip and the back of the blocks below. Walls without the lip on the bottom (Belvedere®, Dimensional, Kodah®, and Claremont® collections) should be stacked with a batter. See individual product specifications for minimum setback recommendations.

**(Outcropping: Place a layer of non-woven geotextile fabric directly behind the blocks. This will keep materials from eroding through the small voids between the blocks.)**

Place Geogrid reinforcing behind the wall as specified in the project documents. See geogrid Installation information in the next sections for further details.

Place and compact open-graded crushed stone, between the blocks, and at least 12" (300 mm) behind the wall, following the procedure used for the bottom course of blocks.

Place non-woven geotextile fabric between the drainstone and the remaining backfill material if specified.

Place and compact backfill behind the drainstone following the procedure used for the bottom course of blocks.

Re-check all units for level and alignment and sweep the top of each course of blocks clean before starting construction of the next course.

Repeat these steps with each course of blocks to the top of the wall.

## GENERAL INFORMATION

### GEOGRID INSTALLATION


Stability of reinforced soil walls rely on the interaction between geogrid reinforcement, soil in the reinforced zone, and the retaining wall blocks. It is very important that reinforced soil walls be constructed per the detailed design prepared by a Professional Engineer. Make sure you are using the proper type and strength of geogrid listed in the design. The geogrid layers need to be placed at the proper elevations and to the proper distances into the reinforced soil zone detailed in the design. It is also critical to use the appropriate backfill soil material in the reinforced soil zone.

Construct the wall up to the elevation of the geogrid layer shown in the design.

Place geogrid layers as shown in the project details extending into the reinforced soil zone to the design length.

Geogrid must be installed with the strong direction (roll direction) into the reinforced soil zone and not parallel to the wall. Geogrid must be placed in a continuous sheet throughout its length from the connection at the blocks to the back of the reinforced zone. Do not splice or overlap the geogrid.

For all retaining wall products except the Outcropping Collection, geogrid is to be sandwiched between courses of block. Make sure the geogrid is as close as possible to the front face of the wall without being visible. Pull the geogrid taut to eliminate any folds and pretension the geogrid. Pin or secure the back edge of the geogrid before placing the reinforced fill. For the Outcropping collection only, layers of geogrid should abut the backside of the block.

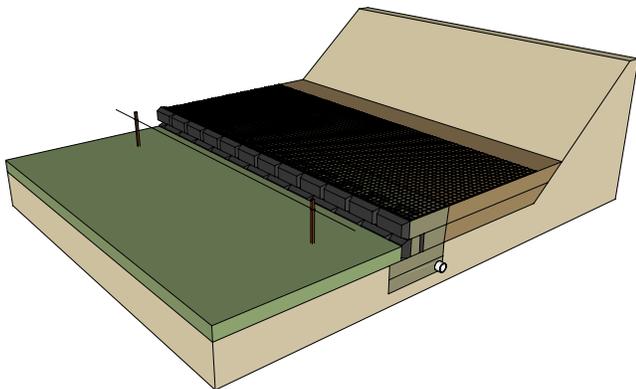


### FINISHING THE TOP OF THE WALL

Completing a few simple tasks near the end of the project will ensure that the wall will function properly and look good for years to come.

Grade the top of the wall in such a way that surface water runs off away from the wall. Never leave the top of a wall graded where surface water will pond behind the wall, or saturate the backfill soils.

Place a layer of non-woven geotextile fabric over the top of the drainstone at the back of the wall. This will keep topsoil from migrating into the drainstone and causing problems.

If required, place a coping layer on the top of the wall. The coping blocks should be placed towards the front edge of the wall blocks and should sit securely on top without tipping forward under their own weight. The coping layer should be carefully adhered with a concrete adhesive specifically formulated for segmental concrete block wall construction.

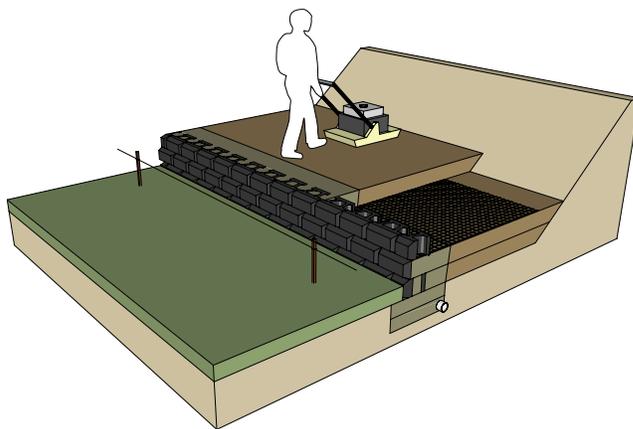

### MORE INFORMATION

Refer to product specific **Notes and Typical Construction Details** for specific applications and construction practices such as corner construction, drain placement, curve construction, and other details. Additional design and installation details are available at [highformat.com](http://highformat.com).

Typical allowable construction tolerance at the wall face is 1" in 10' (1:120) in the vertical and horizontal directions, and a rotation tolerance of 2° from wall batter.

Once you commence working, continue without interruption or delays. This will help expedite construction and minimize the time the excavation is open.

If at any time ground water seepage is observed along the exposed excavation behind the retaining wall, contact the wall designer immediately to determine the corrective action needed.

The construction site should be graded and maintained to direct surface water runoff away from the retaining wall throughout the entire construction process. If there is a rain event with surface water runoff producing erosion or scour near the retaining wall, contact the wall designer immediately to determine the corrective action needed.

# GENERAL INFORMATION

## ADDITIONAL INSTALLATION NOTES FOR:

- Outcropping
- Grand Ledge™

Refer to product pages for specific information and details pertaining to individual products.

## INSTALLATIONS REQUIRING GEOGRID

Please visit [highformat.com](http://highformat.com) for detailed cross-sections of geogrid reinforced Outcropping walls. For Outcropping installations, do not overlap geogrid over top of blocks. Instead, run the geogrid directly up to the back of the blocks. In addition to this reinforcement, a Paraweb strap must be installed through each lifting hook in the back of the Outcropping blocks. Please see standard details for Reinforced Outcropping Walls for further information.

Place and compact drainstone and reinforced fill following the procedure used to set the bottom and upper courses of blocks. It is important to place and compact stone and reinforced fill starting at the back of the retaining blocks and extending into the reinforced soil zone. This will help eliminate “bunching” of the geogrid reinforcement.

Reinforced zone fill material is typically a sand or gravel with less than 5% “fines” (material passing the No. 200 sieve). This material is usually classified as a GW, GP, SW, or SP. It is very important that you only use the fill material specified in your project design drawings and specifications.

Place retained soil immediately between the reinforced soil zone and the back of the excavation. Material should be placed in loose lifts of 6” (150 mm) maximum and compacted to 95% maximum density as determined by a standard proctor test (ASTM D698). Bring the reinforced and retained soil up to grade at the same time. At no time should the elevation of the reinforced soil be more than 1 block higher than the retained soil.

Tracked construction equipment should not be used directly on the geogrid. A minimum of 6” (150 mm) of fill is required between tracked equipment and geogrid to prevent damage to the grid. Rubber-tired equipment may pass over the geogrid when traveling at low speeds of 5 mph (8 km/h) or less.

Avoid any sudden stopping or turning of construction equipment in the reinforced fill zone to prevent moving or damaging the geogrid layers.

Follow geogrid manufacturer’s requirements, including requirements for vertical separation and overlap of geogrid.

## FOR ALL INSTALLATIONS

Never stack blocks more than one course above grade of backfill.



## OUTCROPPING OFFSETS BY HEIGHT OF BLOCK


One of the unique features of the Outcropping system is multiple block heights. To provide a uniform wall batter with multiple height blocks, the setback of the blocks varies proportionally with the block height. The setback in blocks is achieved with shear heels which are cast into the blocks. For a 6” high block, the shear heels are 1.5” deep (1/2 times 3”). For a 12” high block, the shear heels are 3” deep (1 times 3”). For an 18” high block, the shear heels are 4.5” deep (1-1/2 times 3”). For a 24” high block, the shear heels are 6” deep (2 times 3”).

To ensure proper wall alignment and to account for the multiple height blocks and varying setbacks, you have to adjust the bottom row of blocks based on their height. Setup a traditional string line for the back of the wall, then offset the blocks per the detail at the bottom of this page.

Outcropping / Grand Ledge™ lifting device required for proper installation.



## OUTCROPPING OFFSET BY HEIGHT ILLUSTRATION

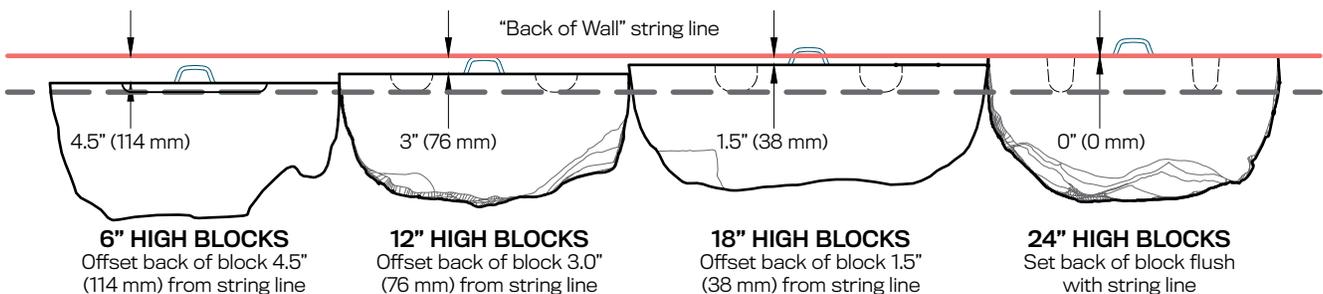



# OUTCROPPING

## FEATURES

- Beautiful weathered stone textures and natural color blends
- Consistent dimensions equals fast installation
- Quality materials equals long term durability
- Freestanding units have five-sided surface texture to allow for freestanding (two-sided) installations or as a top course on an Outcropping retaining wall
- Corner blocks help make a 90° corner with four-sided surface texture and can be installed with alternating faces exposed to maintain a more random look
- Galvanized steel hooks are available and required for reinforced walls.

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY



LAKESHORE BLEND



AUBURN RIDGE  
(Special Order)



Refer to our website for the most recent color offerings.


Outcropping pallets are sold in full pallet quantities only, individual sizes cannot be requested.

Actual weight and color may vary.

## CORNER PALLET: 6"

Weight: 2,015± lbs (inc. pallet)  
Coverage: 11 sq ft  
Units Per Pallet: 4

Product depth nominally 27".




6"H 39"L

**UNIT: CORNER 6"**  
Weight: 480± lbs

## CORNER PALLET: 12"

Weight: 3,600± lbs (inc. pallet)  
Coverage: 19.5 sq ft  
Units Per Pallet: 3

Product depth nominally 30".



12"H 48"L

**UNIT: CORNER 12"**  
Weight: 1,170± lbs


## CORNER NOTES

- Two 6" high corner blocks are typically stacked on top of each other and placed on top of a 12" block.
- In a few areas, you may need to trim a small part of the corner blocks near the back of the wall to avoid interference with the shear heels on adjacent blocks.


# OUTCROPPING

## RETAINING PALLET: A

Weight: 4,000± lbs (inc. pallet)  
 Coverage : 18 sq ft  
 Units Per Pallet: 4 (1 of each)




Product depth ranges nominally from 18" - 24" for Retaining Wall units.



**UNIT: 3.5 X 1**  
 Weight: 750± lbs



**UNIT: 5 X 1**  
 Weight: 1100± lbs




**UNIT: 4 X 1**  
 Weight: 900± lbs




**UNIT: 5.5 X 1**  
 Weight: 1,150± lbs

## RETAINING PALLET: B


Weight: 4,000± lbs (inc. pallet)  
 Coverage : 18 sq ft  
 Units Per Pallet: 6 (1 of each)




Product depth ranges nominally from 18" - 24" for Retaining Wall units.



**UNIT: 2 X .5**  
 Weight: 250± lbs




**UNIT: 3 X 1**  
 Weight: 620± lbs




**UNIT: 3 X .5**  
 Weight: 320± lbs



**UNIT: 4.5 X 1**  
 Weight: 950± lbs




**UNIT: 4 X .5**  
 Weight: 450± lbs



**UNIT: 6 X 1**  
 Weight: 1,300± lbs

## RETAINING PALLET: C


Weight: 4,000± lbs (inc. pallet)  
 Coverage : 18 sq ft  
 Units Per Pallet: 4 (1 of each)




Product depth ranges nominally from 18" - 24" for Retaining Wall units.




**UNIT: 2 X .5**  
 Weight: 250± lbs



**UNIT: 5 X 1.5**  
 Weight: 1,600± lbs




**UNIT: 3 X .5**  
 Weight: 320± lbs



**UNIT: 4 X 2**  
 Weight: 1,800± lbs

## FREESTANDING PALLET: D

Weight: 3,150± lbs (inc. pallet)  
 Coverage: 11 sq ft  
 Units Per Pallet: 3 (1 of each)




Product depth nominally 30" for Freestanding Wall units.



**UNIT: 4 X 1**  
 Weight: 1,080± lbs




**UNIT: 5 X 1**  
 Weight: 1,540± lbs




**UNIT: 4 X .5**  
 Weight: 460± lbs

## FREESTANDING PALLET: E


Weight: 3,450± lbs (inc. pallet)  
 Coverage: 10.5 sq ft  
 Units Per Pallet: 3 (1 of each)




Product depth nominally 30" for Freestanding Wall units.



**UNIT: 3 X 1**  
 Weight: 880± lbs



**UNIT: 6 X 1**  
 Weight: 2,080± lbs



**UNIT: 3 X .5**  
 Weight: 440± lbs


# OUTCROPPING

## RETAINING WALL PATTERNS, 90 SQ FT


(2 PALLET A, 2 PALLET B AND 1 PALLET C)

Please note that the length dimensions shown for Outcropping blocks are rounded for reference. The actual length of the constructed wall will vary slightly from the pattern dimensions shown. Block size and placement shown are for reference only. Individual Outcropping blocks will vary with installation pattern. For more information visit [highformat.com](http://highformat.com)


### 45'L X 2'H




### 30'L X 3'H



### 22.5'L X 4'H

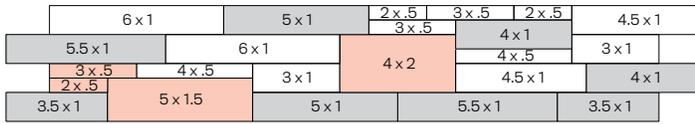



### 18'L X 5'H

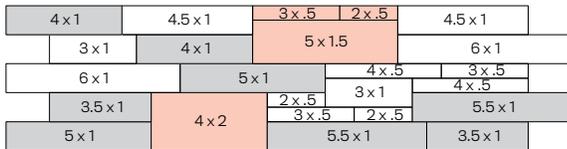

## 90° CORNER WALL

Outcropping has two corner blocks to help make a 90° corner in the wall. The corner blocks are four-sided, and can be installed with alternating faces exposed to maintain a more random look.

The size of the corner blocks have been chosen to account for the wall batter in both directions. Two 6" high corner blocks are typically stacked on top of each other and placed on top of a 12" block. The corner blocks are intended to be stepped back 3" in both directions per course. In a few areas, you may need to trim a small part of the corner blocks near the back of the wall to avoid interference with the shear heels on adjacent blocks. See the pattern shown here, which details how to make a 90° corner with (4) A Pallets, (4) B Pallets, (2) C Pallets, (3) 12" Corner Blocks and (4) 6" Corner Blocks.

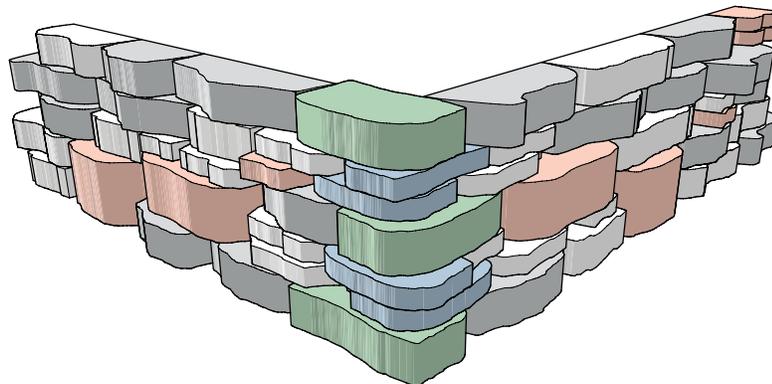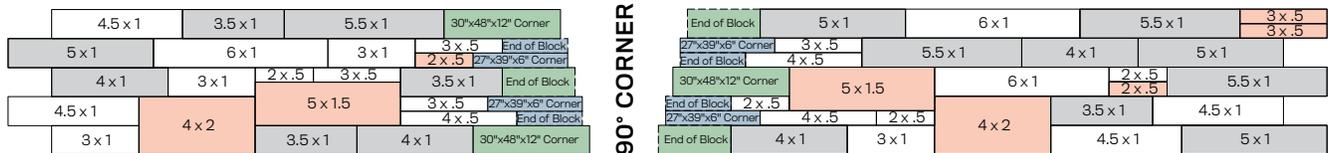


## CURVES

Outcropping Blocks have shear heels to help with wall integrity and provide a setback from lower blocks in the wall, this causing the wall to batter back. The batter is important to the engineering design to the wall, and it must be accounted for during construction of a curved wall section.

### OUTSIDE (CONVEX) CURVE


If you are constructing an outside (convex) curve, the wall batter will cause the blocks higher in the wall to have a shorter radius around the curve than lower blocks. This will cause the higher blocks to "grow" in the wall layout pattern. (This is similar in concept to the inside lane of a race track being shorter than the outside lane). The result is a potential overlap between some of the blocks in the wall. The best way to deal with this overlap is to saw cut the end of the smaller block, which allows the blocks to fit tight together and all the shear heels to be properly engaged. This saw cut is typically made on an angle to match the taper on the block you are abutting.

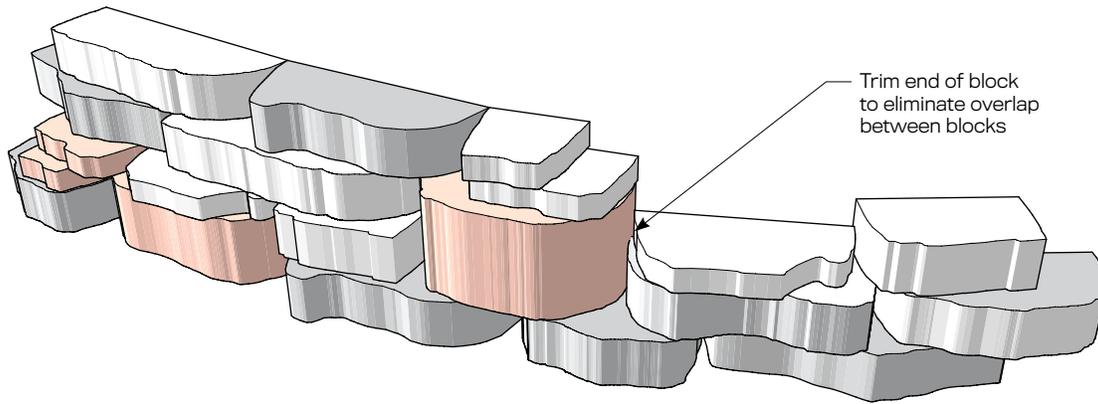

### INSIDE (CONCAVE) CURVE

If you are constructing an inside (concave) curve, the wall batter will cause the block higher in the wall to have a longer radius around the curve than lower blocks. The important step when constructing an inside curve is to keep all blocks tight together. In most cases, the blocks will touch somewhere along the sides of the blocks, not at the back of the blocks. If needed, you can trim the ends off some blocks to prevent gaps from opening up between blocks. When constructing a curve with a short radius, voids may form at the back of the wall where two blocks meet.

Additionally, gaps in concave walls can be secured pre-emptively by placing a layer of non-woven geotextile fabric against the backside of the block before installation of drainstone behind the wall.

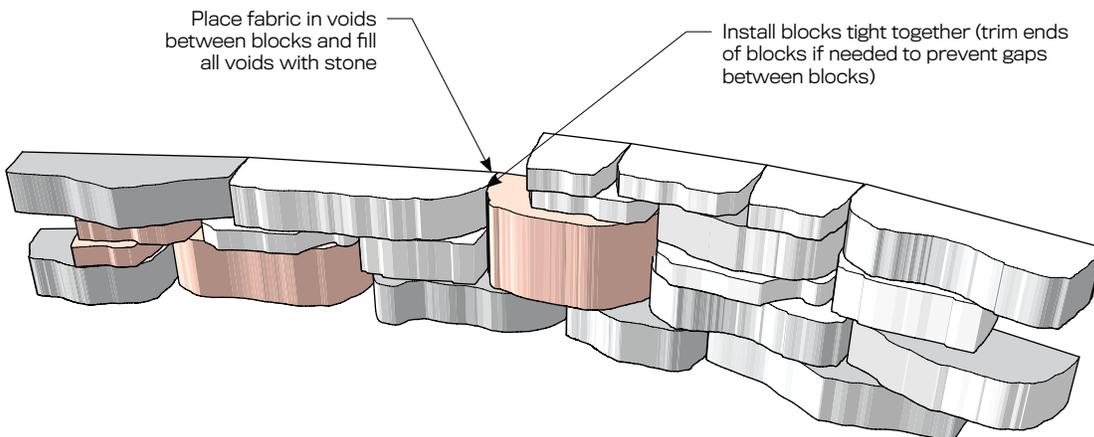




## GENERAL NOTES FOR WALL SECTIONS

This page shows typical construction details for Outcropping walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual Outcropping blocks will vary with installation pattern.

## TYPICAL GRAVITY RETAINING WALL DETAIL WITH AGGREGATE WEDGE BACKFILL

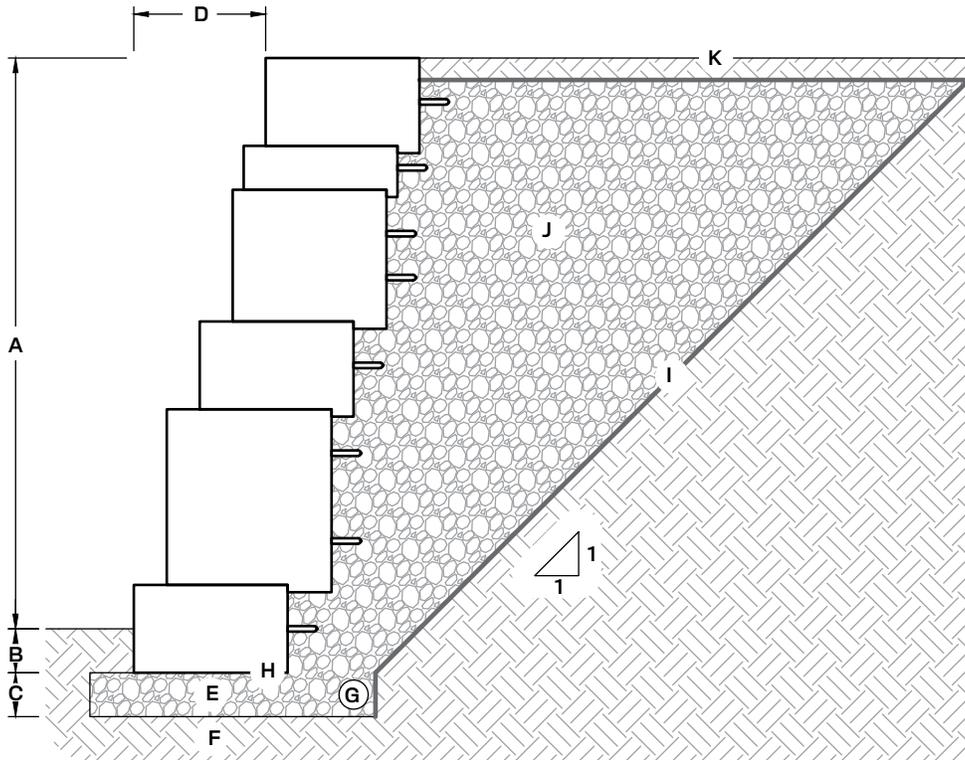


- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 3" setback per 12" vertical (14°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12", installed on a 1:1 slope behind wall
- K. Finish grade to drain away from the wall

## GENERAL NOTES FOR WALL SECTIONS

This page shows typical construction details for Outcropping walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction **must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual Outcropping blocks will vary with installation pattern.


## TYPICAL RETAINING WALL DETAIL WITH SOIL REINFORCEMENT

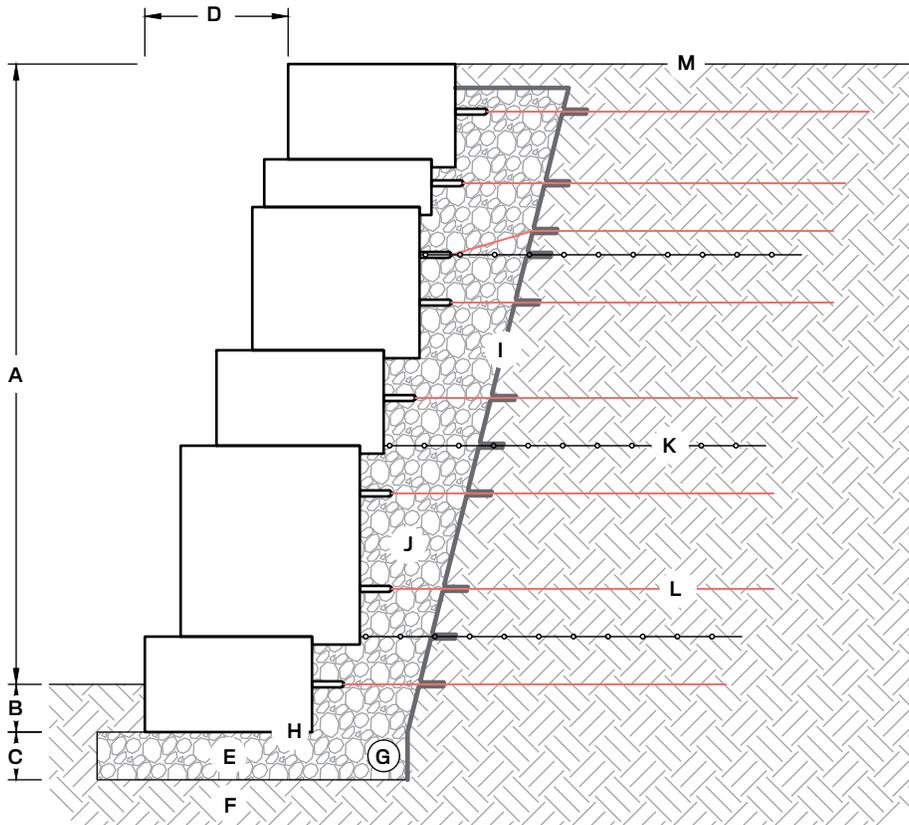


- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 3" setback per 12" vertical (14°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12" behind wall
- K. Geogrid, abutting the backside of the block (length, vertical placement, and geogrid type varies by design)
- L. Paraweb strap installed on every loop (embedment depth varies by design, maintain min. 3" vertical from geogrid)
- M. Finish grade to drain away from the wall

## TYPICAL PARAWEB STRAP CONNECTION DETAIL

PLAN VIEW

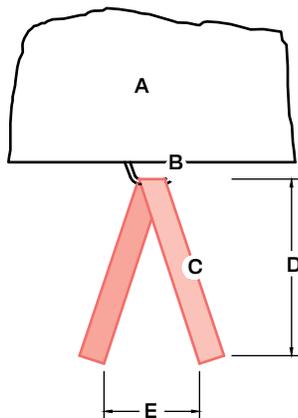

SIDE PROFILE VIEW

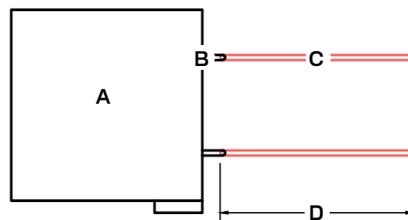


- A. Outcropping wall block
- B. Galvanized lift hook (required)
- C. Paraweb strap (required for each lift hook)
- D. Strap embedment depth (varies per design)
- E. 12-24" separation between straps ends

## GENERAL NOTES FOR WALL SECTIONS

This page shows typical construction details for Outcropping walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual Outcropping blocks will vary with installation pattern.

## TYPICAL RETAINING WALL DETAIL WITH CAST-IN-PLACE CONCRETE BACKFILL

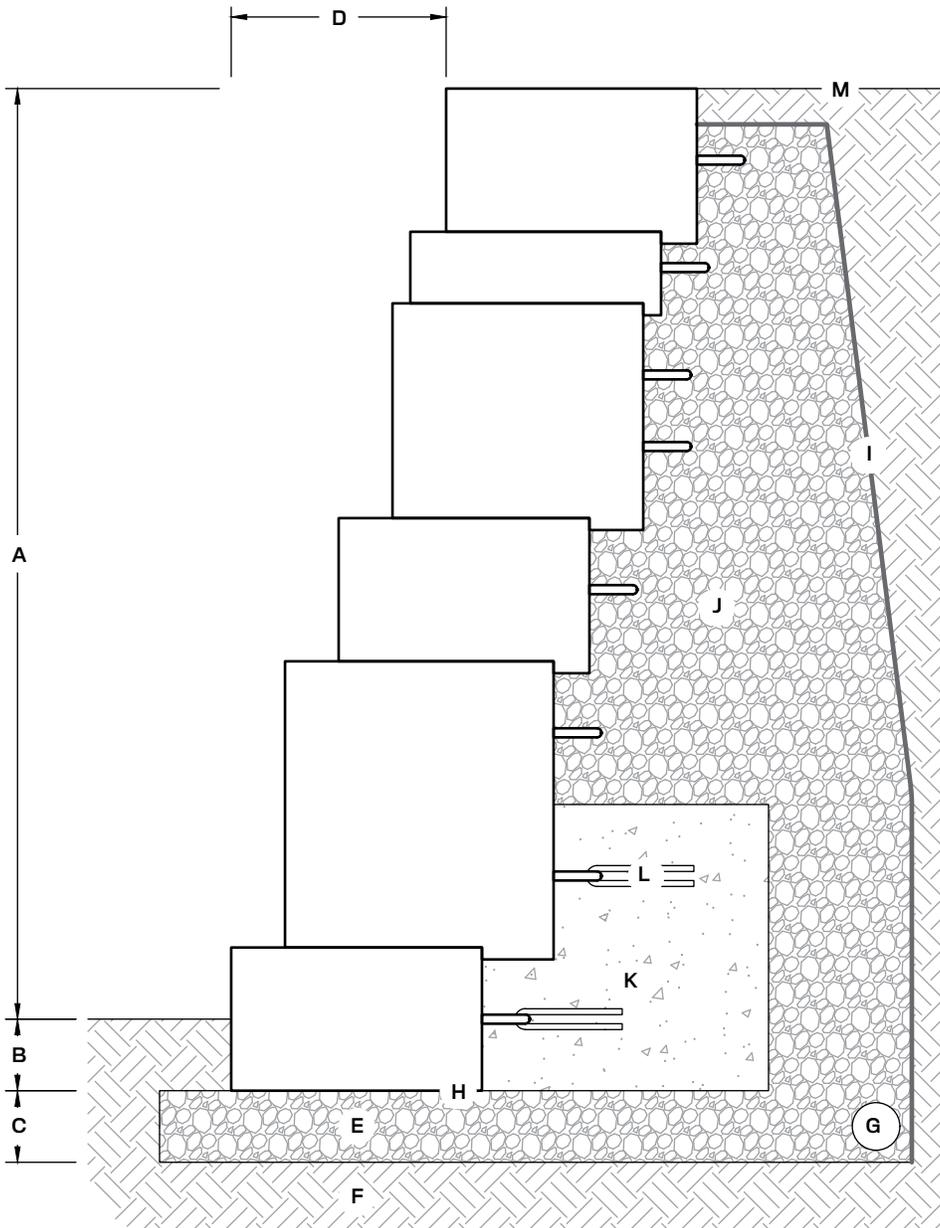

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 3" setback per 12" vertical (14°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12" behind wall and cast-in-place concrete
- K. Cast-in-place Redi-mix concrete, min. 2,500 psi (height & depth vary by design)
- L. #4 rebar, 18" lengths bent in half (9" embedment), installed on every loop
- M. Finish grade to drain away from the wall

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### SILTY OR CLAYEY SAND


$\phi = 28^\circ$   
(unless noted otherwise)

#### CONDITIONS


**NO LIVE LOAD  
NO BACK SLOPE  
NO TOE SLOPE**

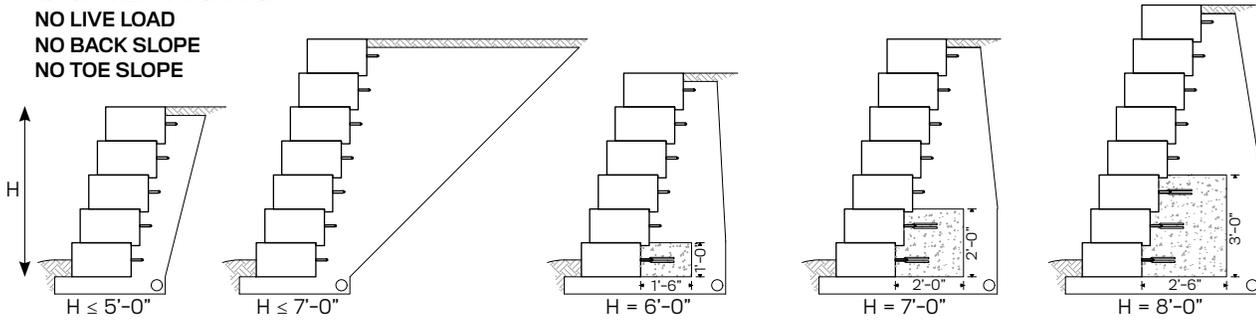

**NOTE: Paraweb strap (typical at every hook), 7'-6" length.**

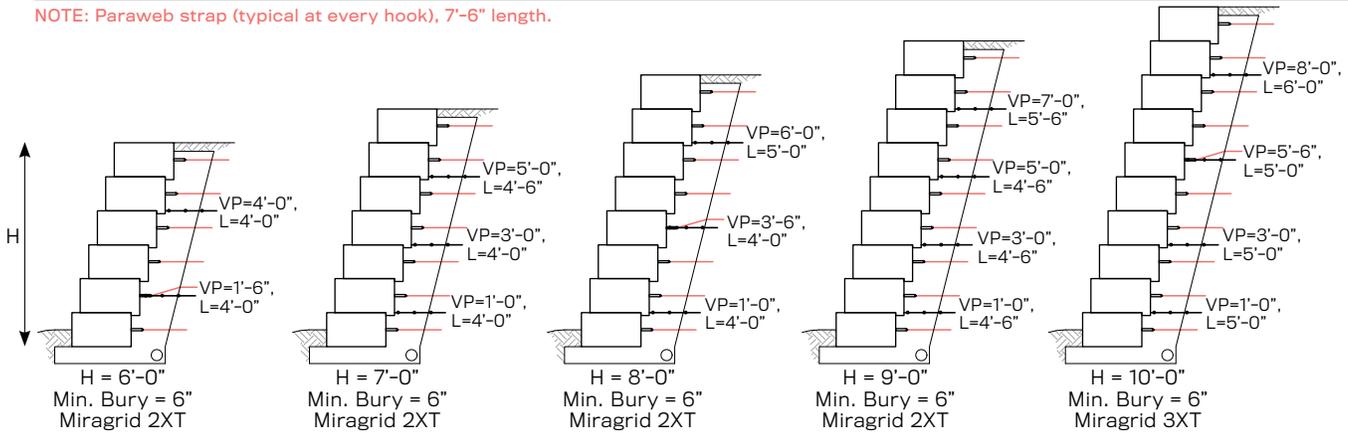

**NOTE: Paraweb strap (typical at every hook), 7'-6" length.**

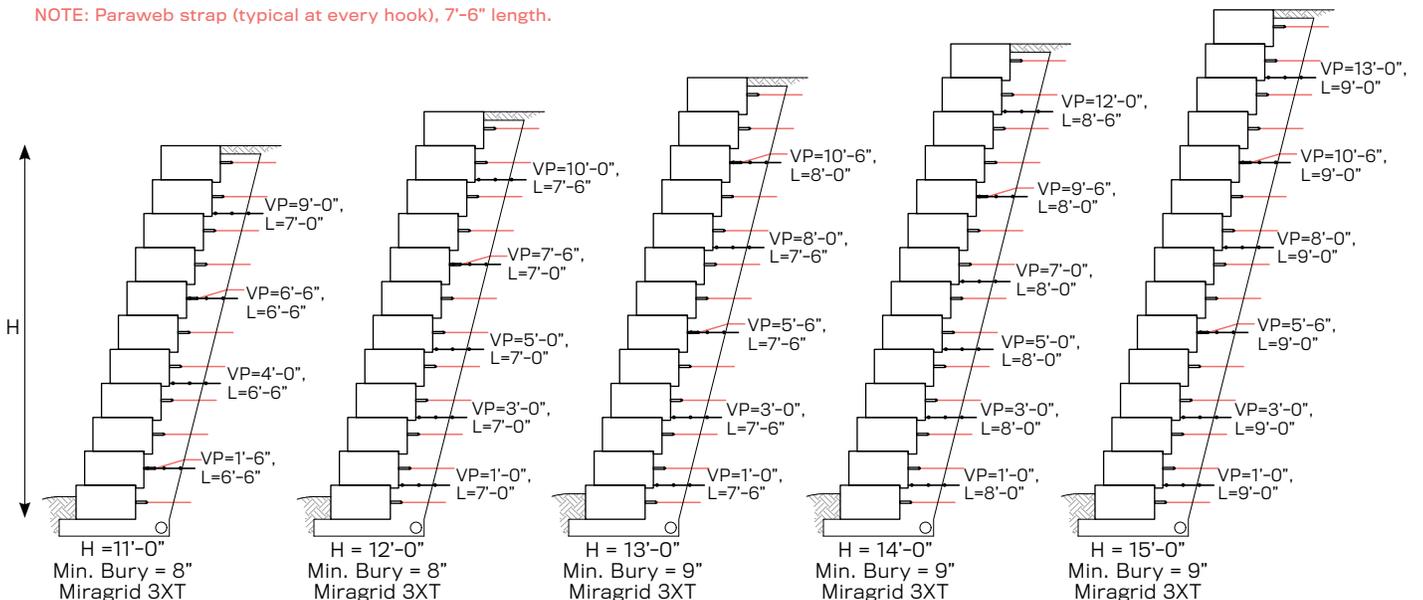

# OUTCROPPING

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)


$\phi = 28^\circ$   
(unless noted otherwise)

WALLS


### SILTY OR CLAYEY SAND

#### CONDITIONS


100 PSF SURCHARGE  
NO BACK SLOPE  
NO TOE SLOPE

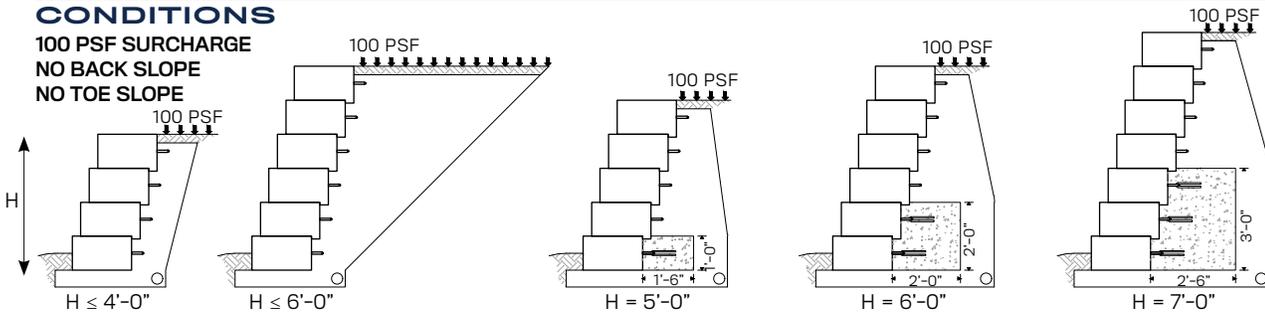

NOTE: Paraweb strap (typical at every hook), 9'-0" length.

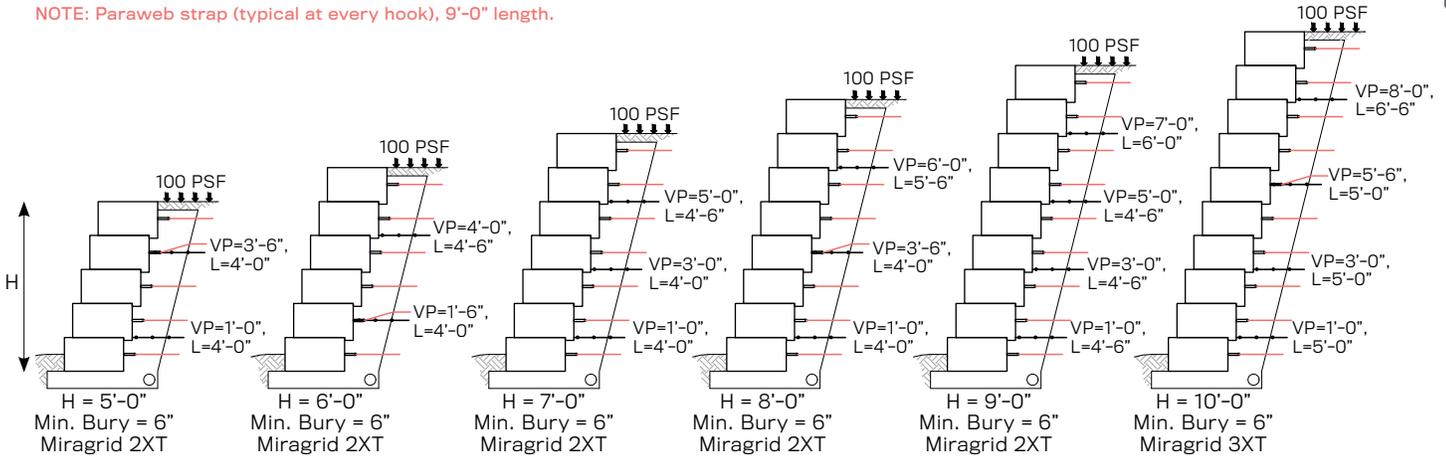

NOTE: Paraweb strap (typical at every hook), 9'-0" length.

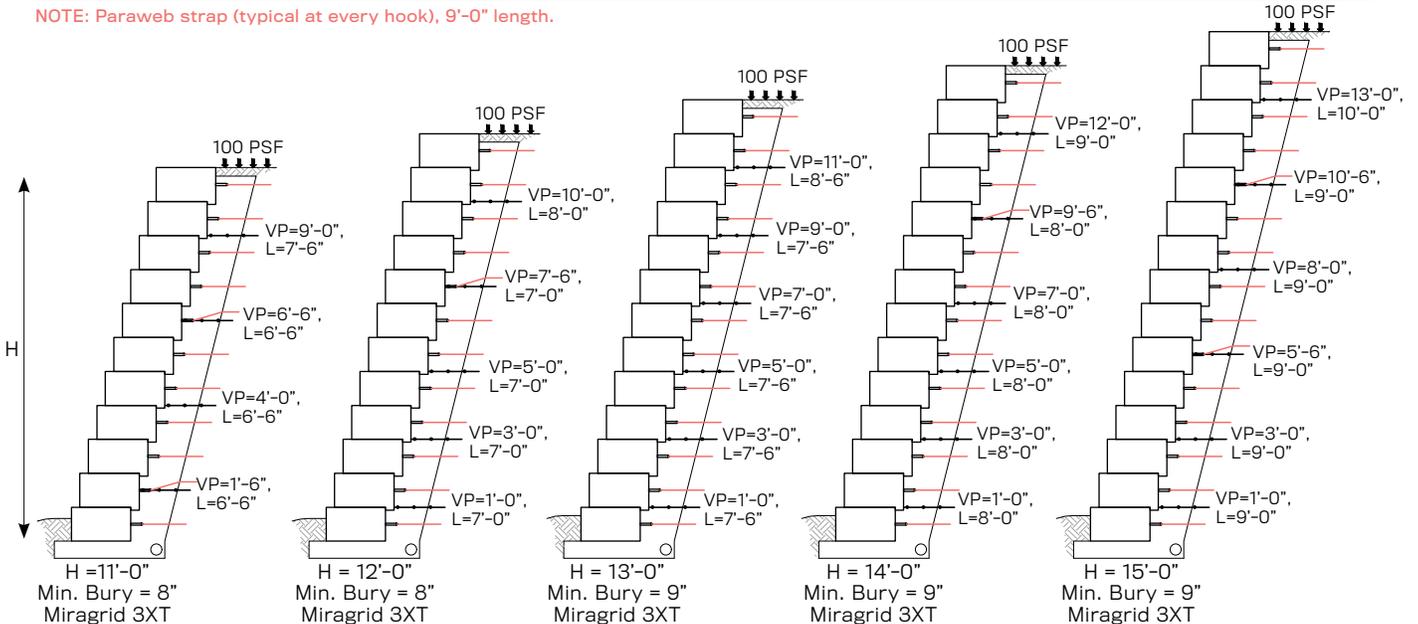

# OUTCROPPING

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

$\phi = 28^\circ$

(unless noted otherwise)


### SILTY OR CLAYEY SAND

#### CONDITIONS


250 PSF SURCHARGE

NO BACK SLOPE


NO TOE SLOPE

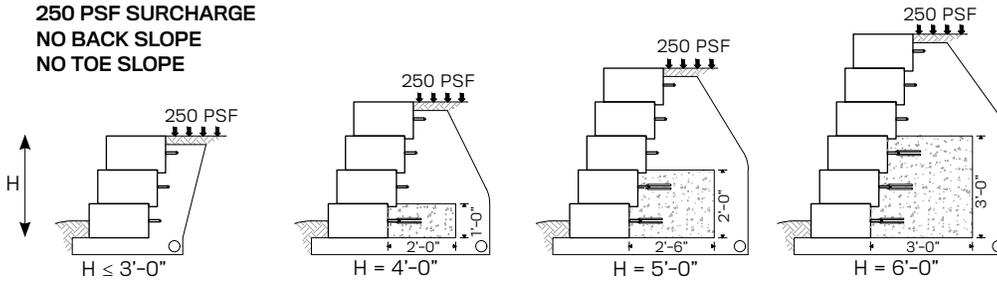

NOTE: Paraweb strap (typical at every hook), 12'-0" length.

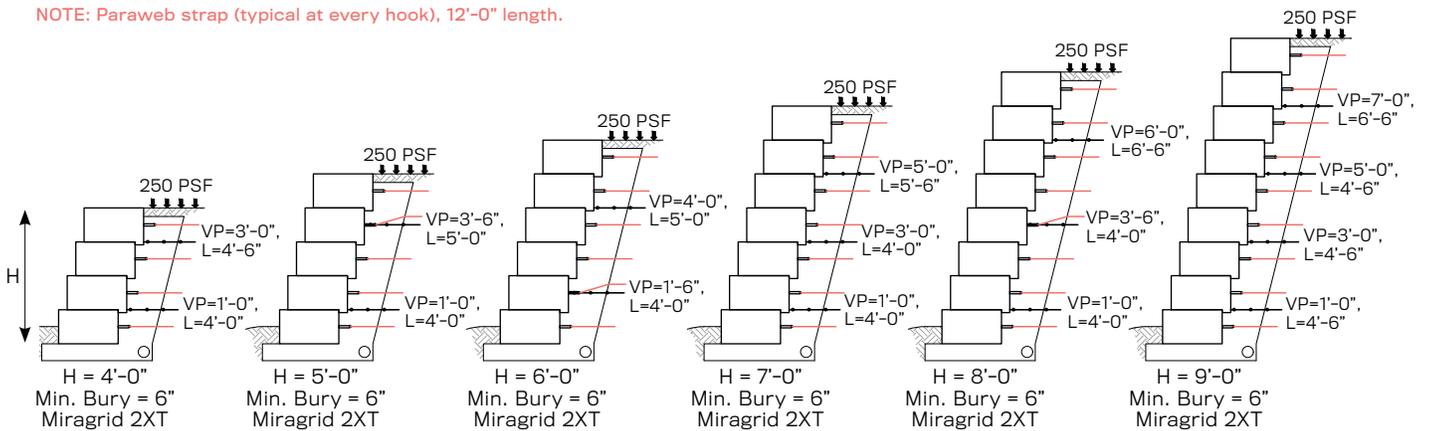

NOTE: Paraweb strap (typical at every hook), 12'-0" length.

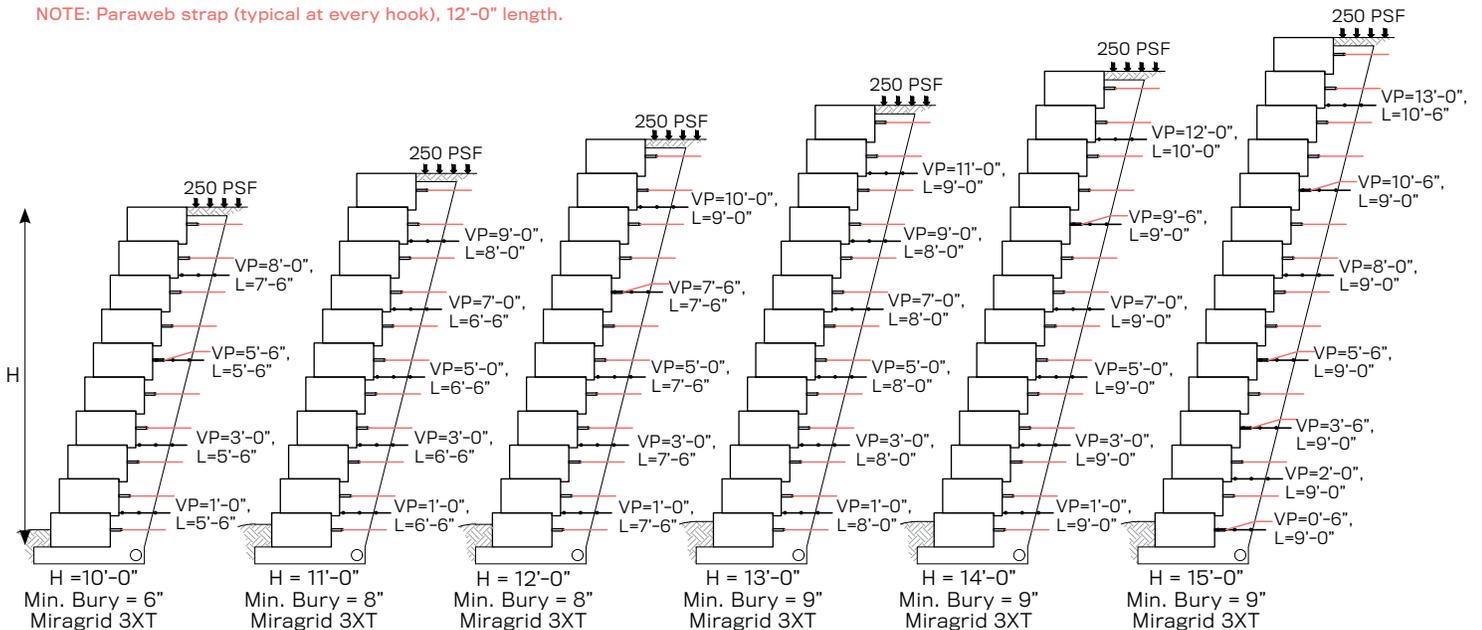

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### SILTY OR CLAYEY SAND


φ = 28°  
(unless noted otherwise)

#### CONDITIONS


1:2.5 BACK SLOPE  
NO SURCHARGE  
NO TOE SLOPE

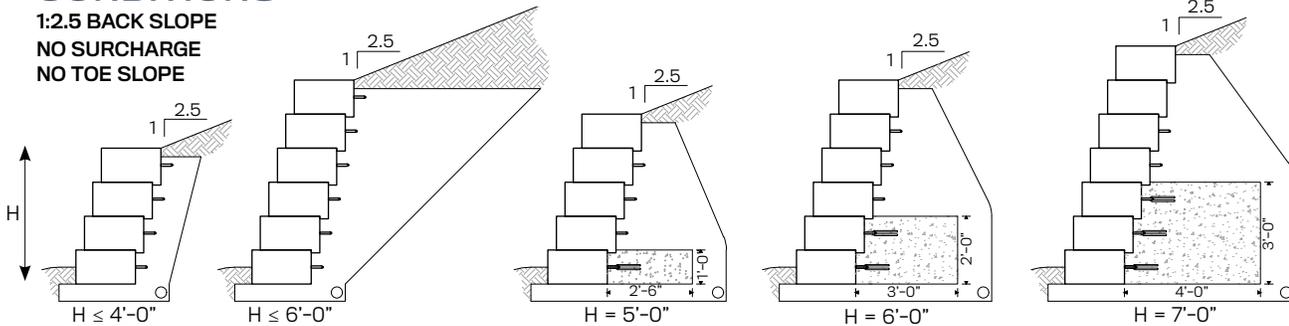

NOTE: Paraweb strap (typical at every hook), 10'-6" length.

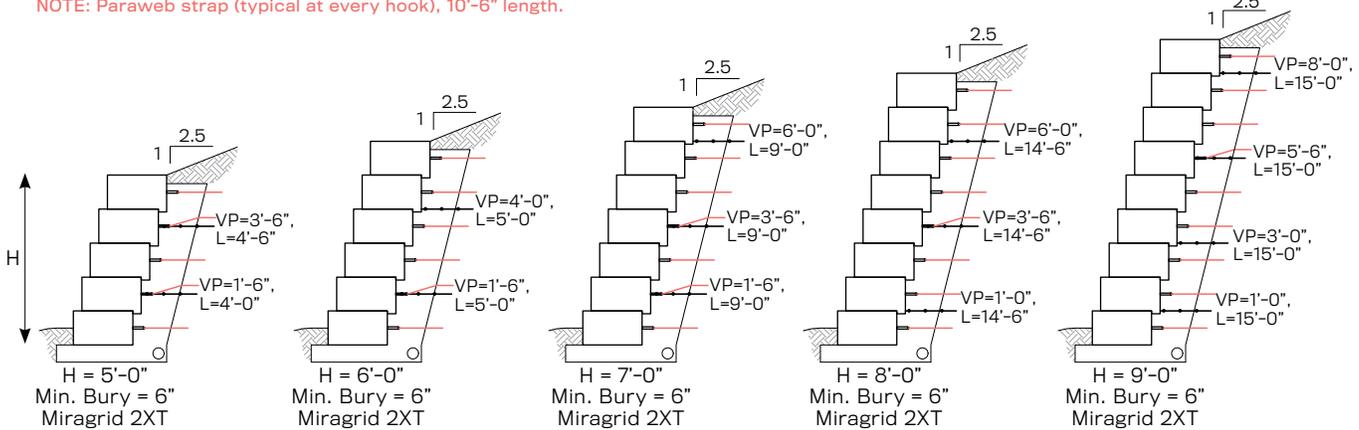

NOTE: Paraweb strap (typical at every hook), 10'-6" length.

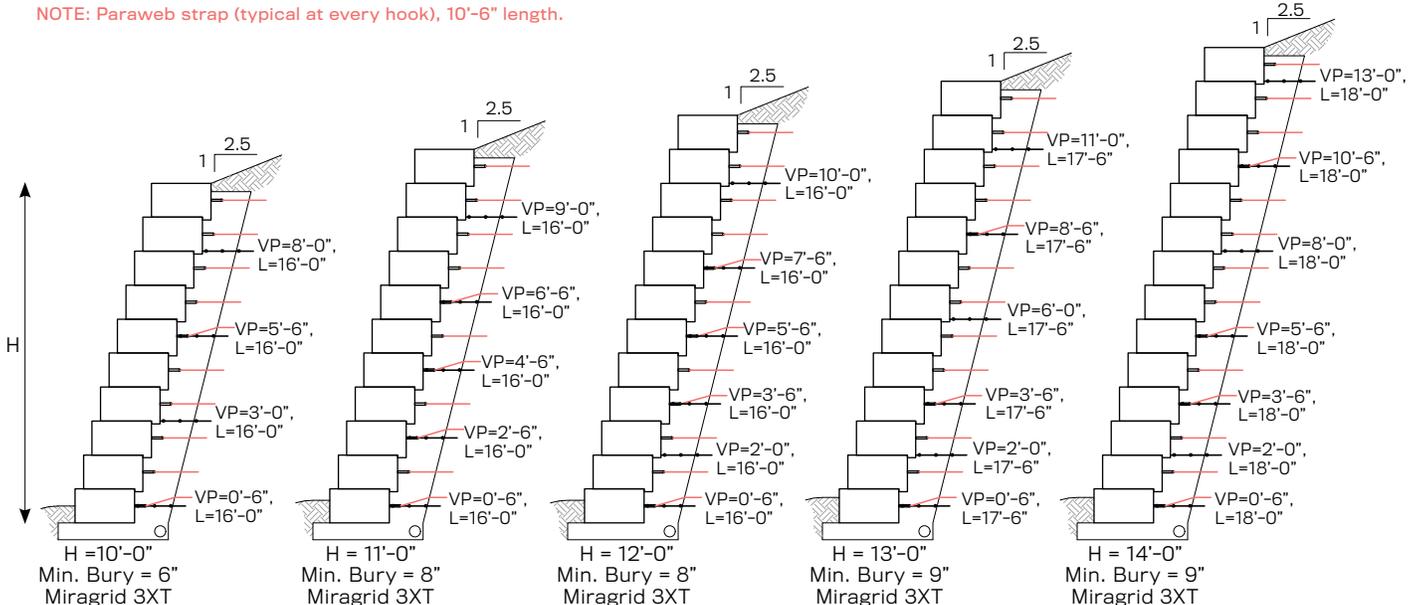

# OUTCROPPING

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### FINE TO MEDIUM SAND


$\phi = 30^\circ$   
(unless noted otherwise)

#### CONDITIONS


- NO LIVE LOAD
- NO BACK SLOPE
- NO TOE SLOPE

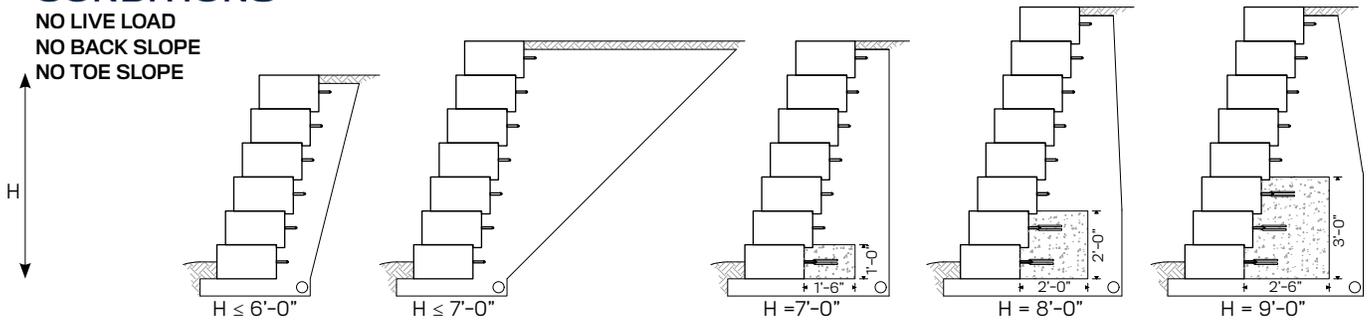

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

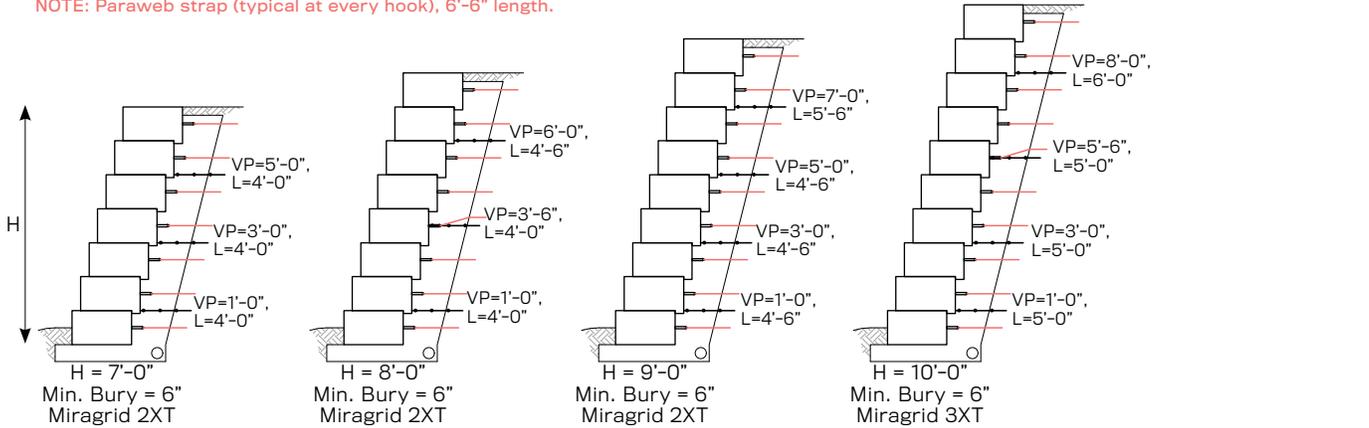

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

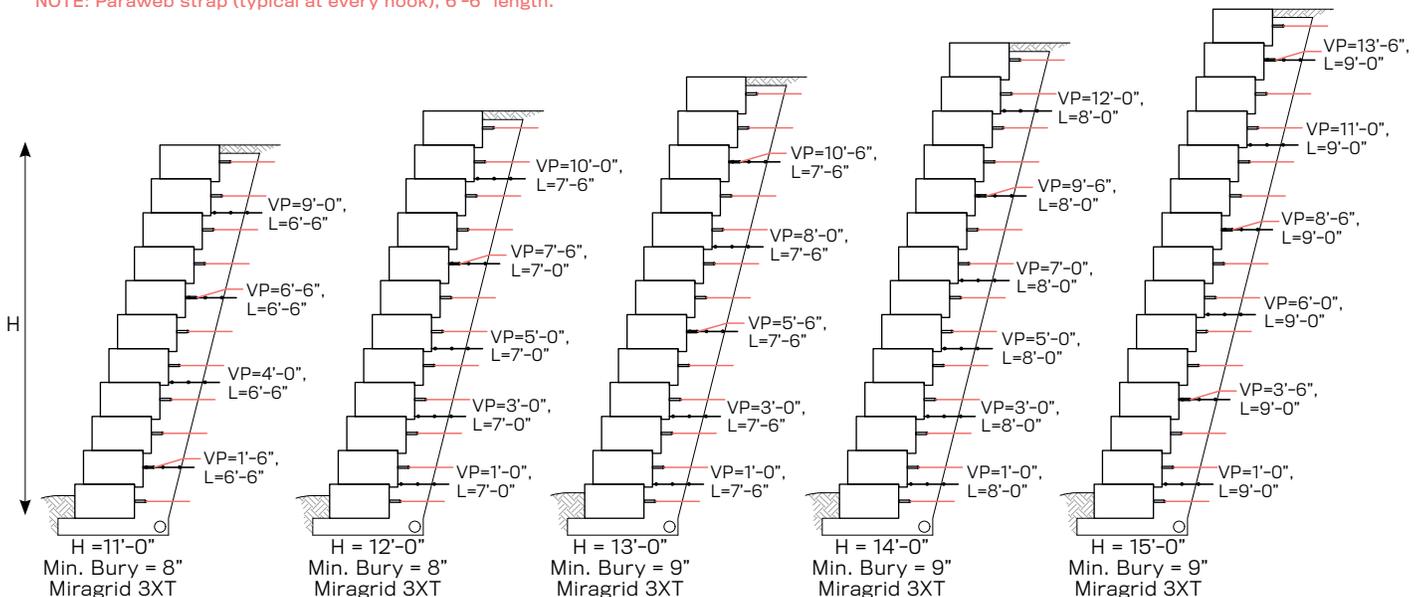

# OUTCROPPING

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad

L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### FINE TO MEDIUM SAND


$\phi = 30^\circ$   
(unless noted otherwise)

#### CONDITIONS


100 PSF SURCHARGE  
NO BACK SLOPE  
NO TOE SLOPE

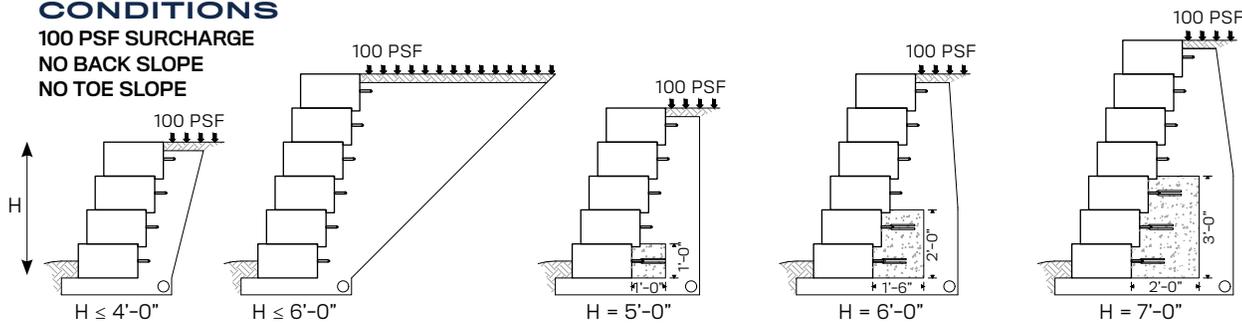

NOTE: Paraweb strap (typical at every hook), 8'-0" length.

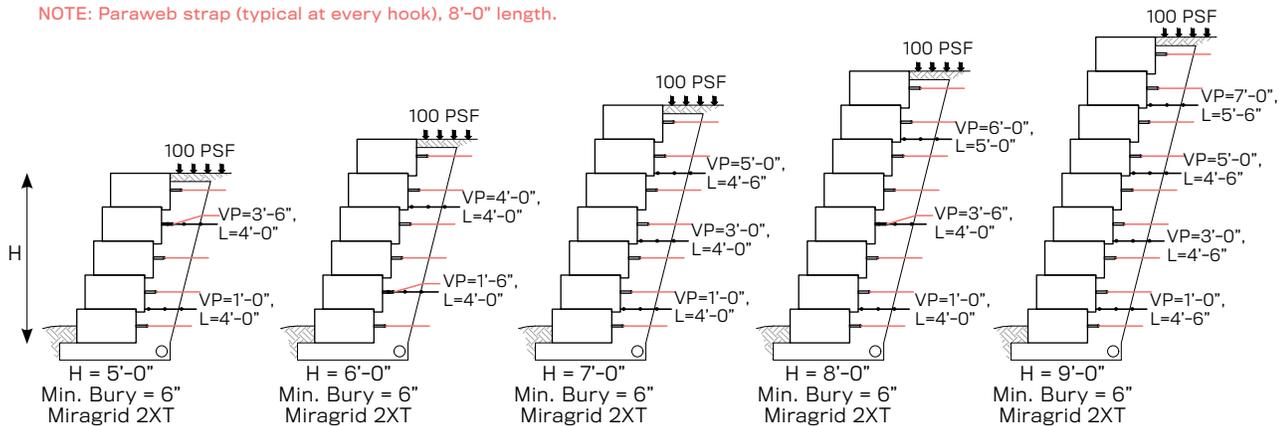

NOTE: Paraweb strap (typical at every hook), 8'-0" length.

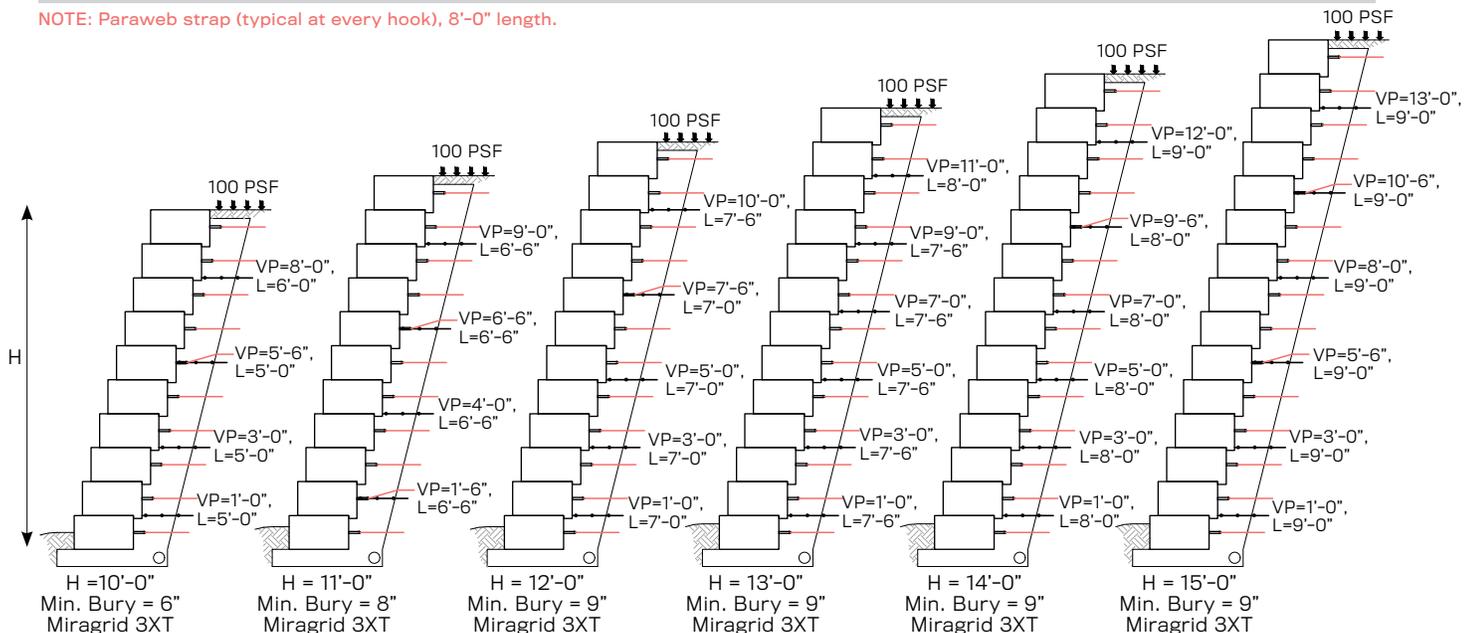

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### FINE TO MEDIUM SAND


$\phi = 30^\circ$   
(unless noted otherwise)

#### CONDITIONS


**250 PSF SURCHARGE**  
**NO BACK SLOPE**  
**NO TOE SLOPE**

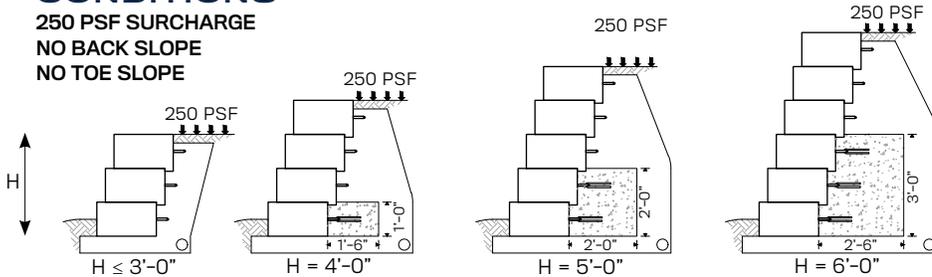

**NOTE: Paraweb strap (typical at every hook), 10'-0" length.**

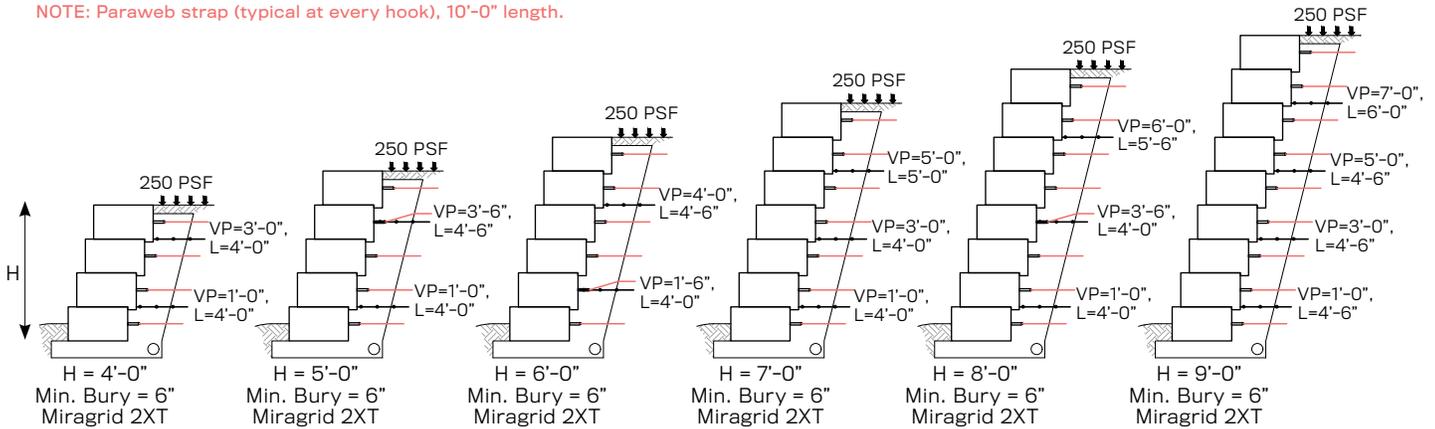

**NOTE: Paraweb strap (typical at every hook), 10'-0" length.**

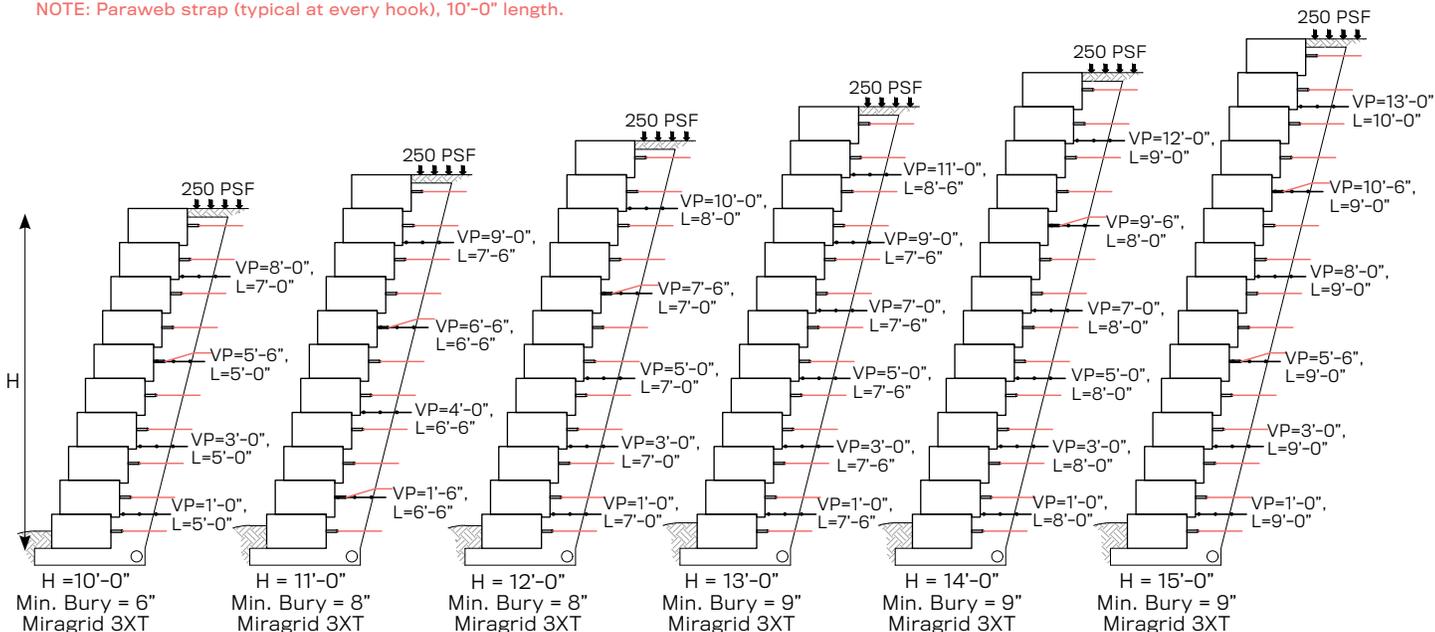

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.


H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)


### FINE TO MEDIUM SAND φ = 30°

#### CONDITIONS


1:2.5 BACK SLOPE  
NO SURCHARGE  
NO TOE SLOPE

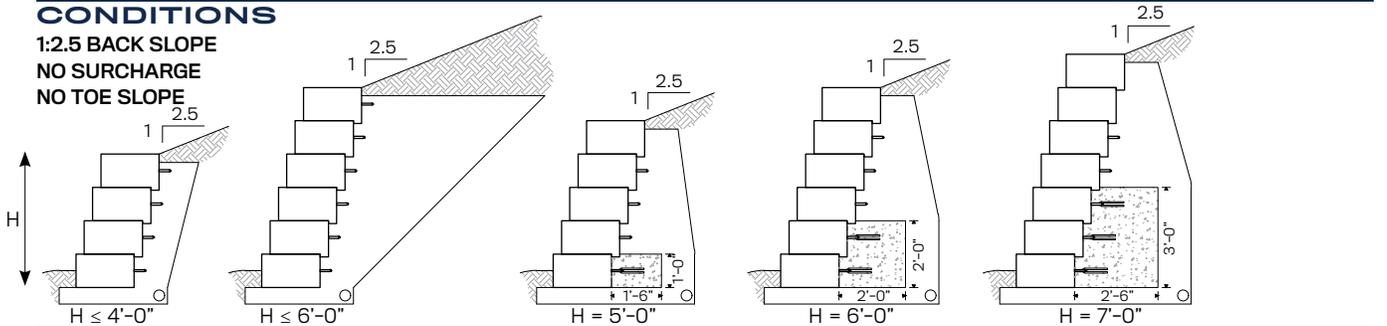

NOTE: Paraweb strap (typical at every hook), 9'-0" length.

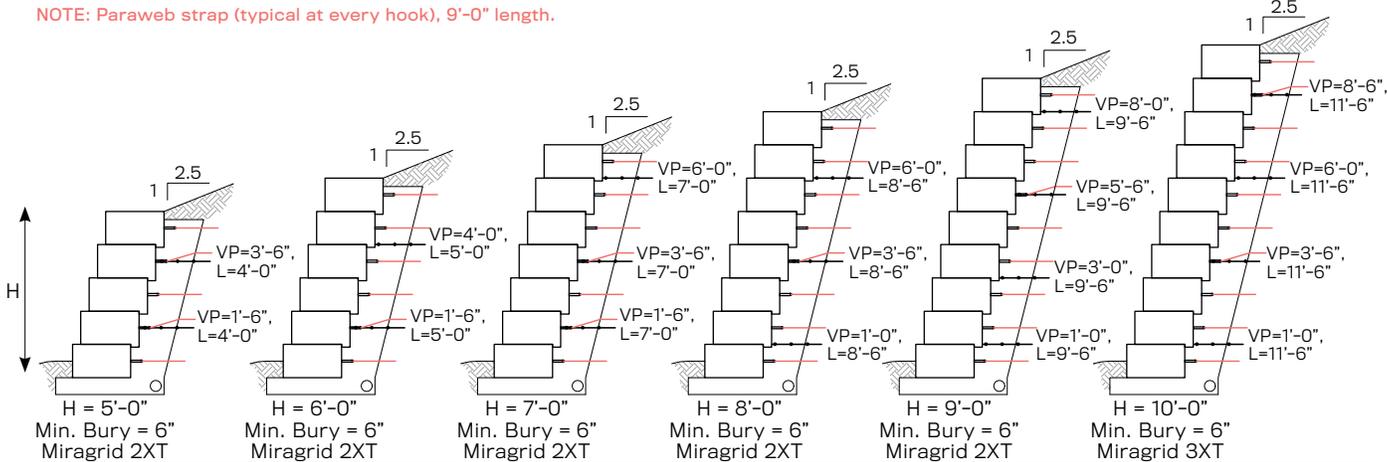

NOTE: Paraweb strap (typical at every hook), 9'-0" length.

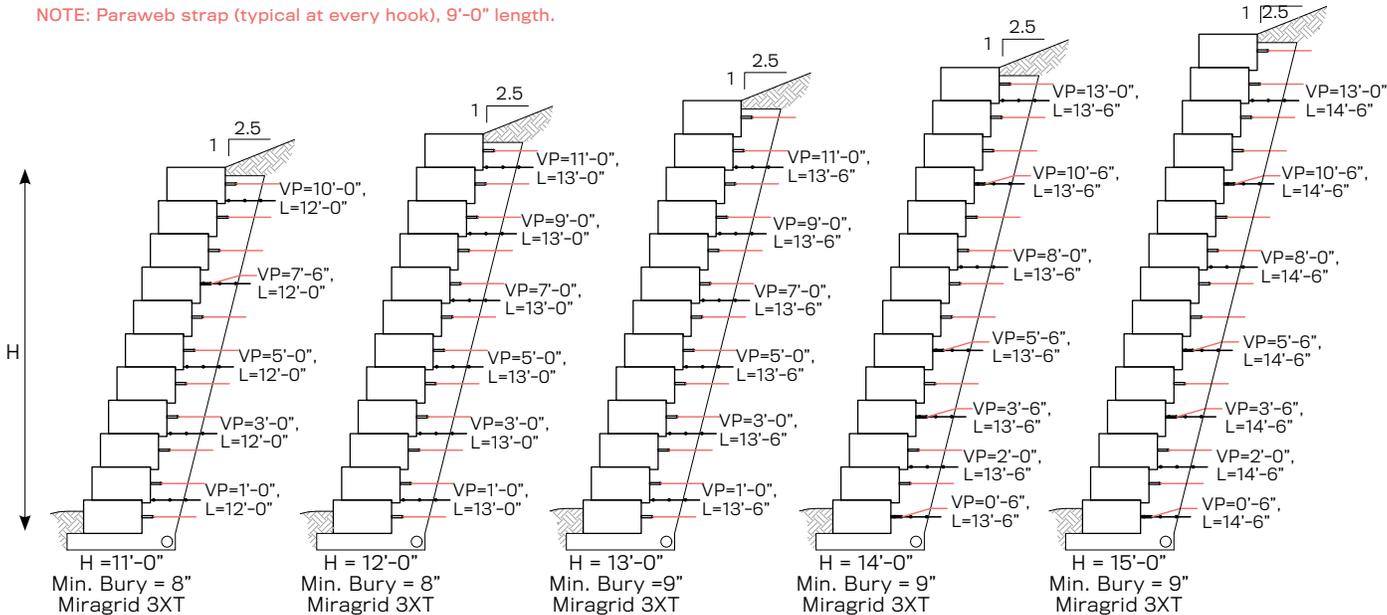

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad

L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### DENSE WELL-GRADED SAND, SAND AND GRAVEL


φ = 34°  
(unless noted otherwise)

#### CONDITIONS


- NO LIVE LOAD
- NO BACK SLOPE
- NO TOE SLOPE

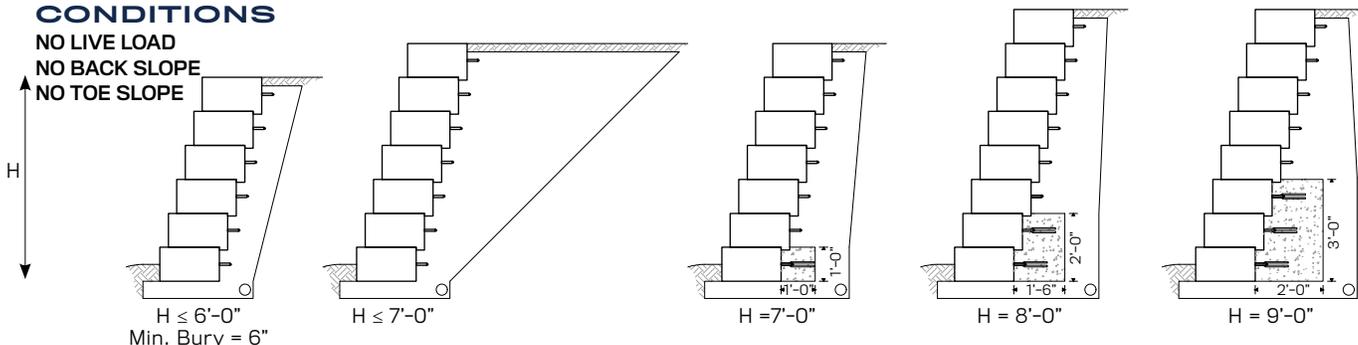

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

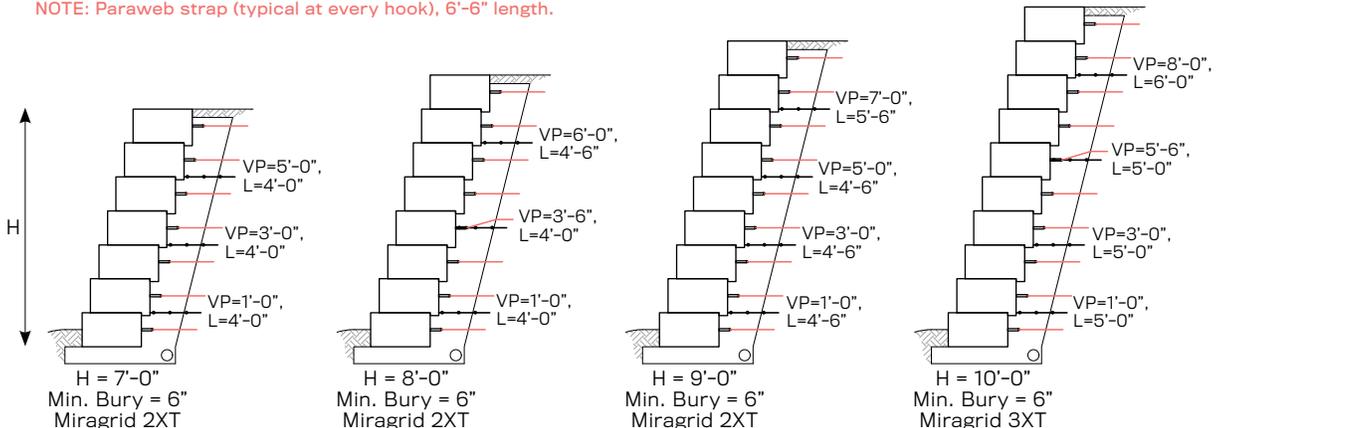

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

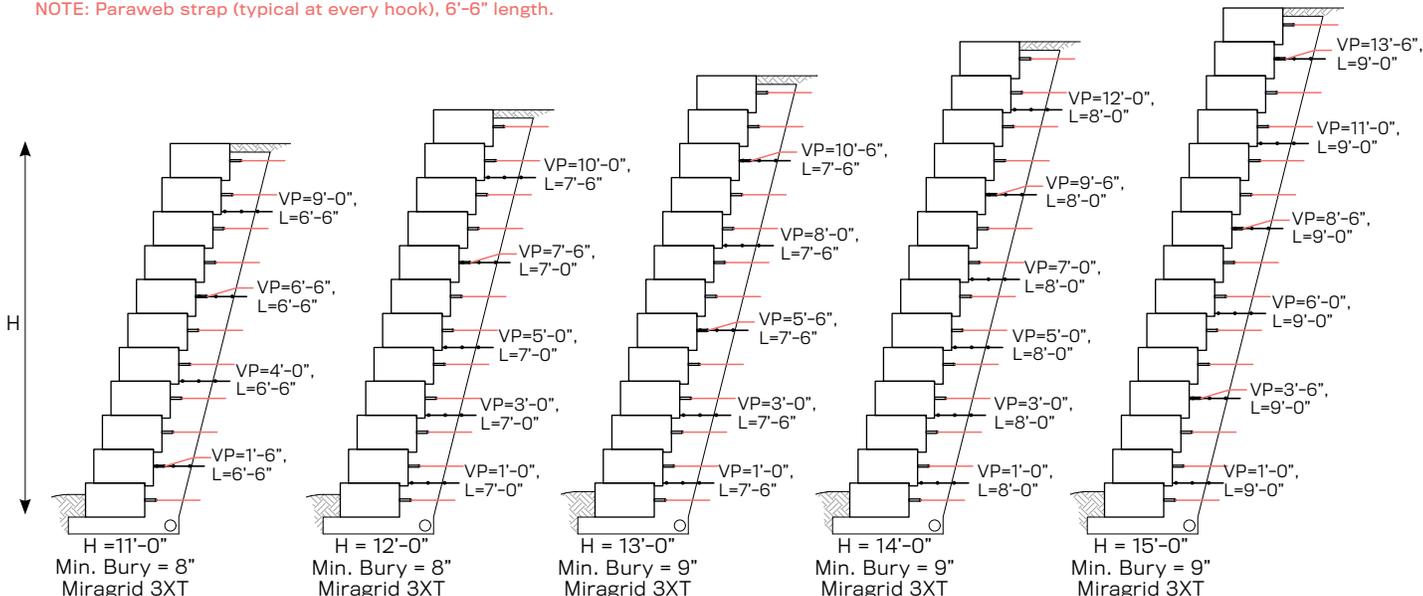

# OUTCROPPING

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### DENSE WELL-GRADED SAND, SAND AND GRAVEL


$\phi = 34^\circ$   
(unless noted otherwise)

#### CONDITIONS


100 PSF SURCHARGE

NO BACK SLOPE


NO TOE SLOPE

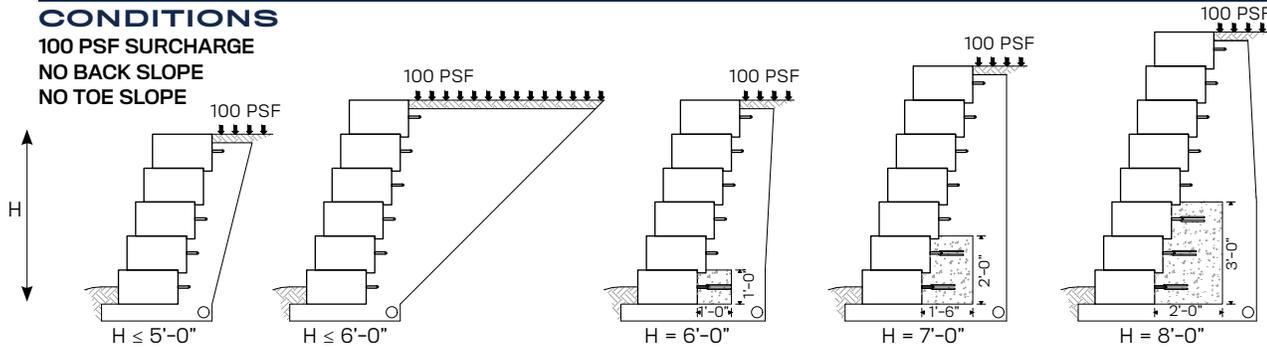

NOTE: Paraweb strap (typical at every hook), 5'-6" length.

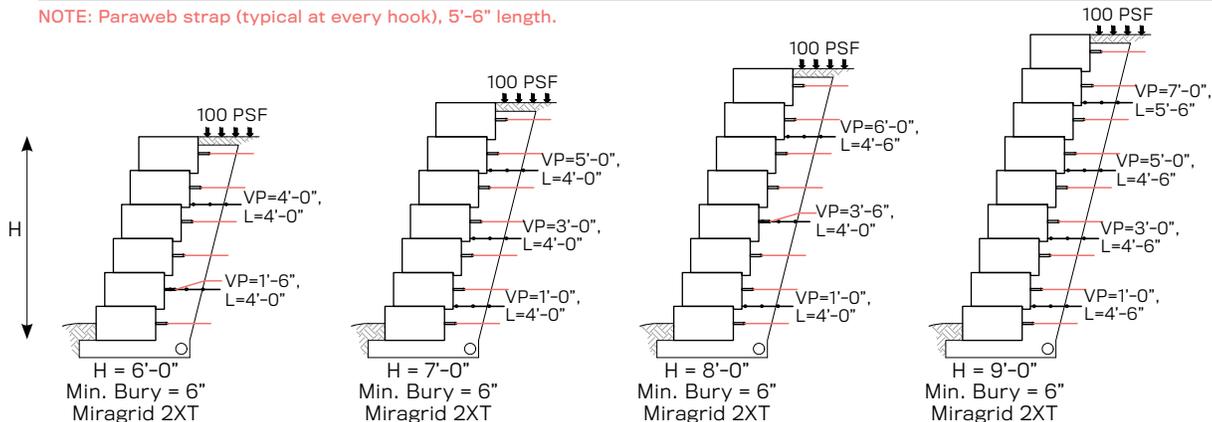

NOTE: Paraweb strap (typical at every hook), 5'-6" length.

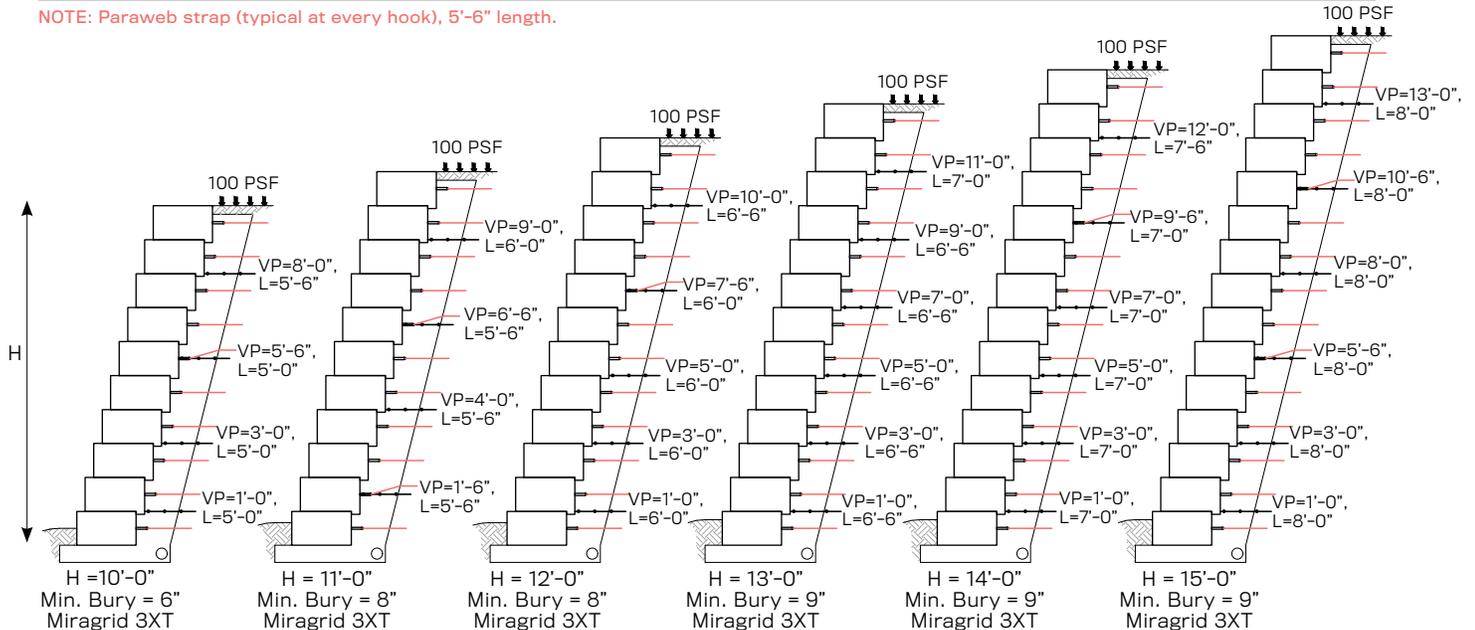

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### DENSE WELL-GRADED SAND, SAND AND GRAVEL


$\phi = 34^\circ$   
(unless noted otherwise)

#### CONDITIONS


250 PSF SURCHARGE

NO BACK SLOPE


NO TOE SLOPE

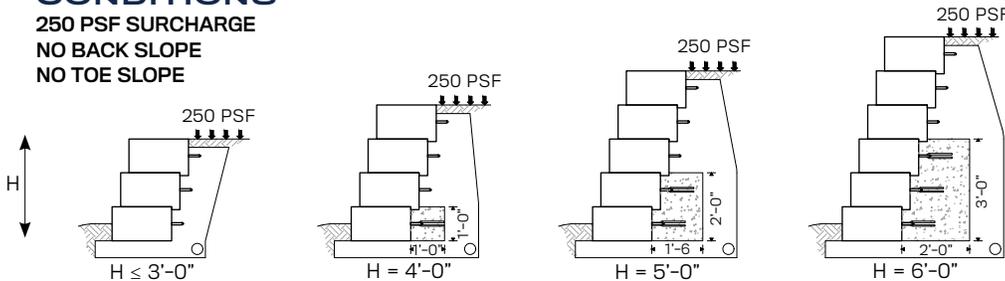

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

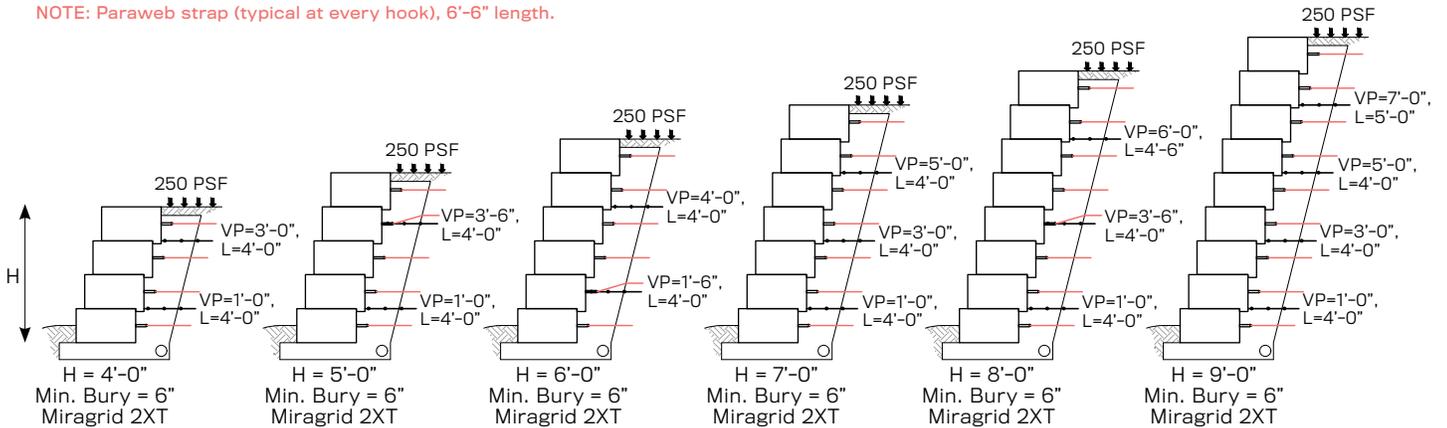

NOTE: Paraweb strap (typical at every hook), 6'-6" length.

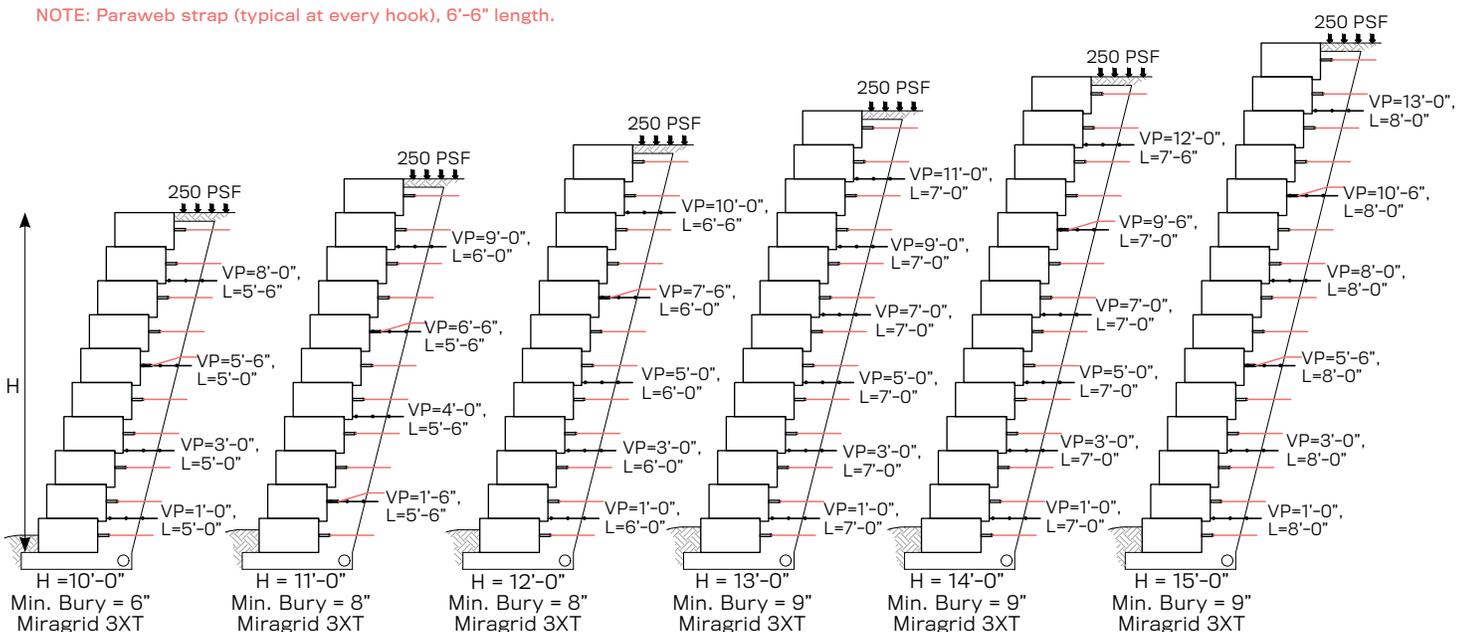

## PRELIMINARY GEOGRID PLACEMENT GUIDE

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Outcropping blocks in the conditions noted below. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed against the backside of the wall at the indicated height above the base.
- Length of geogrid is measured from the rear of the Outcropping blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Outcropping Specifications are to be followed.

H = Height From Top of Stone Leveling Pad  
L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

### DENSE WELL-GRADED SAND, SAND AND GRAVEL


$\phi = 34^\circ$   
(unless noted otherwise)

#### CONDITIONS


1:2.5 BACK SLOPE  
NO SURCHARGE  
NO TOE SLOPE

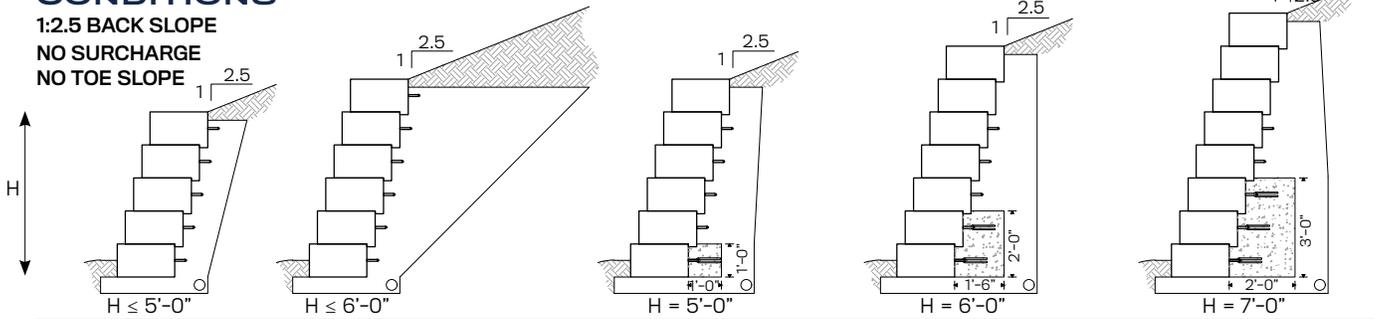

NOTE: Paraweb strap (typical at every hook), 6'-0" length.

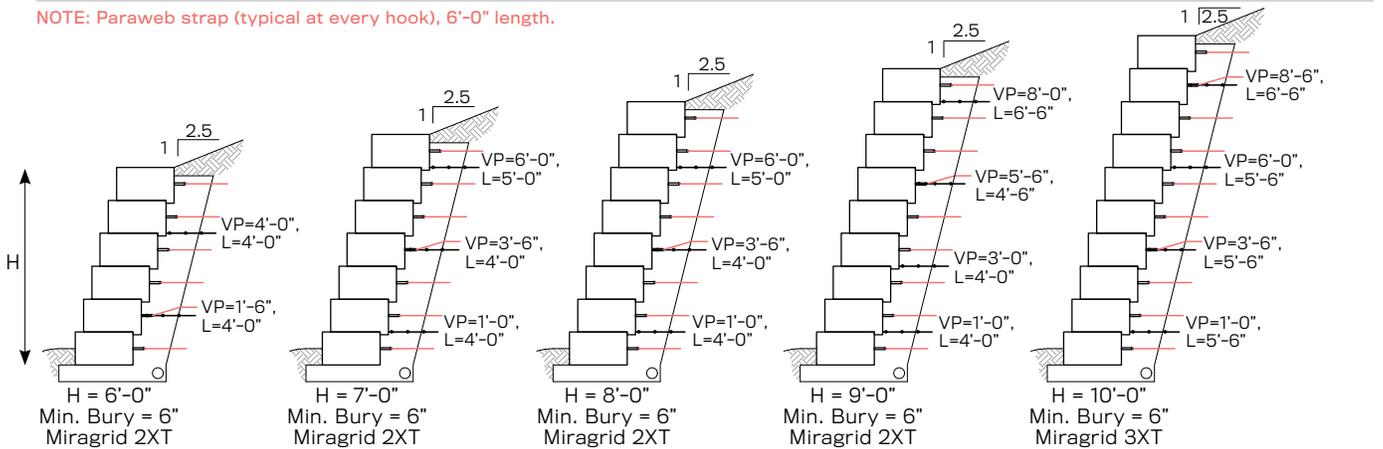

NOTE: Paraweb strap (typical at every hook), 6'-0" length.

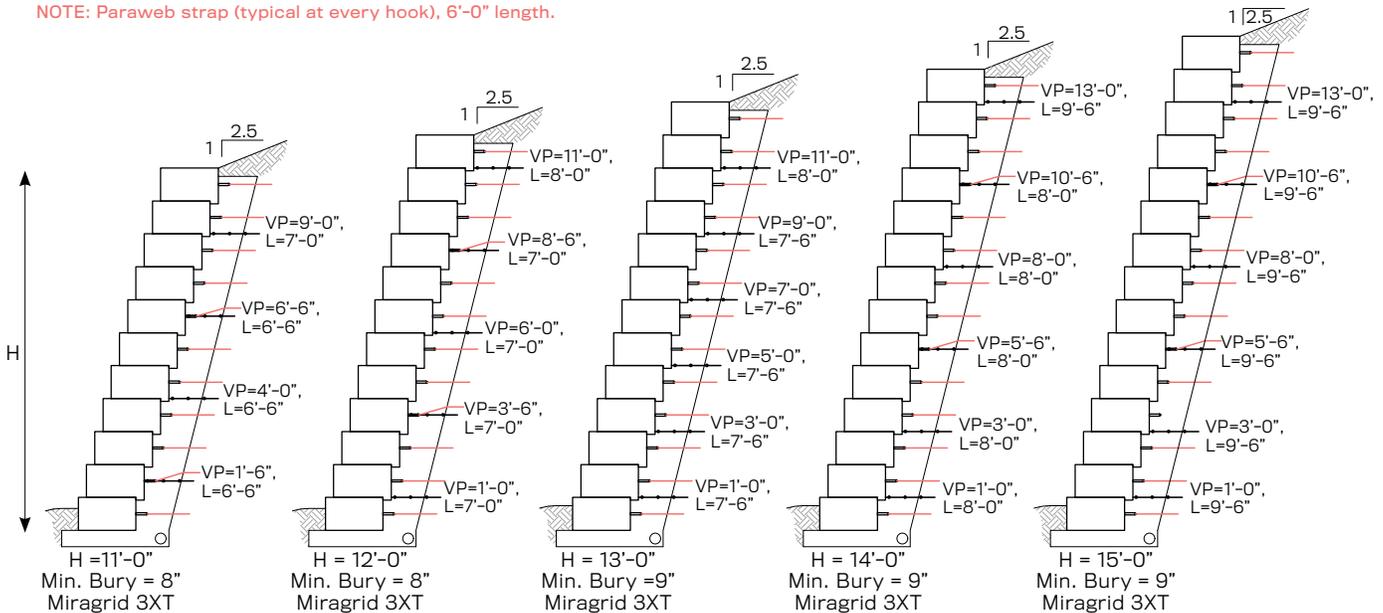



# GRAND LEDGE™

## FEATURES

- The look of natural ledgestone: bold in scale, with consistent dimensions for faster installation
- 24 unique wall textures
- Quality materials equals long term durability
- Four additional 5-sided blocks can be used as 90-degree returns
- Engineerable wall system with capabilities of 5' to 6' gravity walls with optimal site conditions

## MATERIAL WETCAST

### COLOR OPTIONS

FOND DU LAC



LIMESTONE








Refer to our website for the most recent color offerings.

Dimensions are nominal.

Specifications are subject to change.

**There is a minimum 30-ft radius for convex curves created with Grand Ledge™.**

## WALL PALLET



Weight: 4,000± lbs (inc. pallet)  
 Coverage: 18 face feet  
 Pieces Per Pallet: 4

### UNIT: 3'

Dimensions: 36"L x 20"D x 12"H  
 Weight: 650± lbs  
 Units Per Pallet: 1

### UNIT: 4'

Dimensions: 48"L x 20"D x 12"H  
 Weight: 865± lbs  
 Units Per Pallet: 1






### UNIT: 5'

Dimensions: 60"L x 20"D x 12"H  
 Weight: 1,085± lbs  
 Units Per Pallet: 1

### UNIT: 6'

Dimensions: 72"L x 20"D x 12"H  
 Weight: 1,300± lbs  
 Units Per Pallet: 1

## CORNER PALLET



Weight: 4,000± lbs (inc. pallet)  
 Coverage: 22.1 face feet  
 Pieces Per Pallet: 4

### CORNER UNIT: 1

Dimensions: 50.5"L x 25.5"D x 12"H  
 Weight: 1,275± lbs  
 Units Per Pallet: 1

### CORNER UNIT: 2

Dimensions: 35.5"L x 24.25"D x 12"H  
 Weight: 850± lbs  
 Units Per Pallet: 1

### CORNER UNIT: 3

Dimensions: 46"L x 21"D x 12"H  
 Weight: 910± lbs  
 Units Per Pallet: 1

### CORNER UNIT: 4


Dimensions: 42.5"L x 19.75"D x 12"H  
 Weight: 830± lbs  
 Units Per Pallet: 1

**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Grand Ledge™ walls. These drawings are representative of major components required in wall construction. Specific details including reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.


- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.

**TYPICAL GRAVITY RETAINING WALL DETAIL**

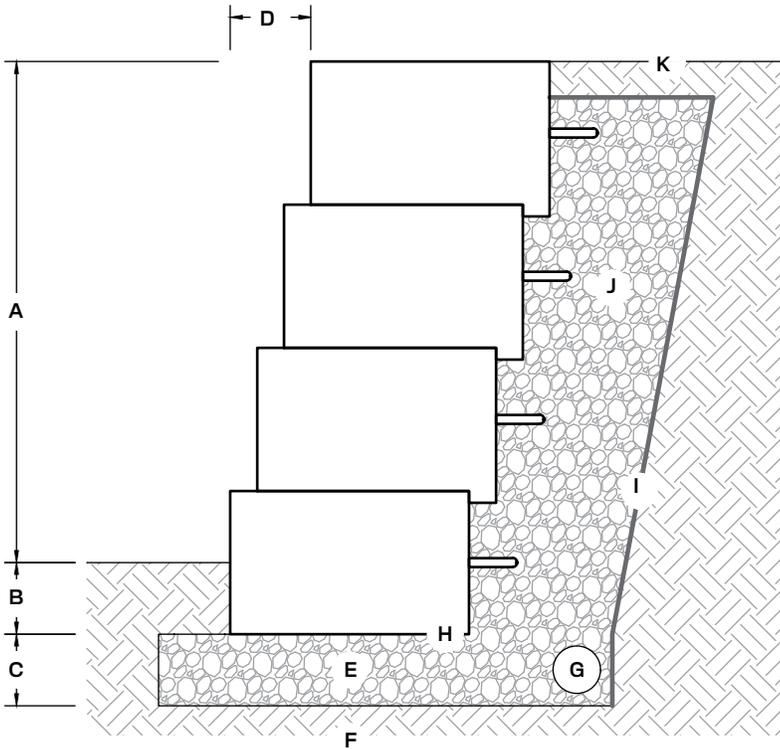

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. 2-1/4" setback per 12" vertical (10.6°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12" behind wall
- K. Finish grade to drain away from the wall

**TYPICAL FREESTANDING WALL DETAIL**

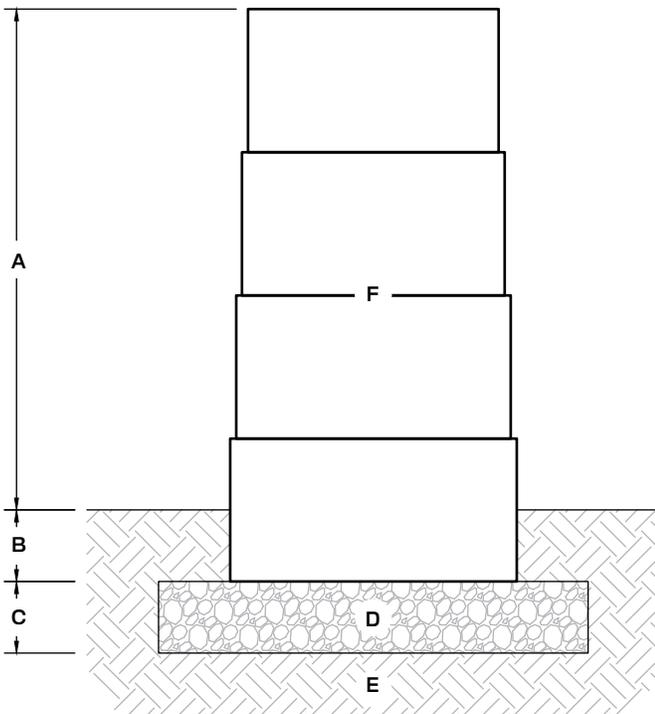


- A. Wall height above grade (varies)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Freestanding Grand Ledge™ wall blocks

**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Grand Ledge™ walls. These drawings are representative of major components required in wall construction. Specific details including reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.

**TYPICAL RETAINING WALL DETAIL WITH GEOSYNTHETIC REINFORCED SOIL**

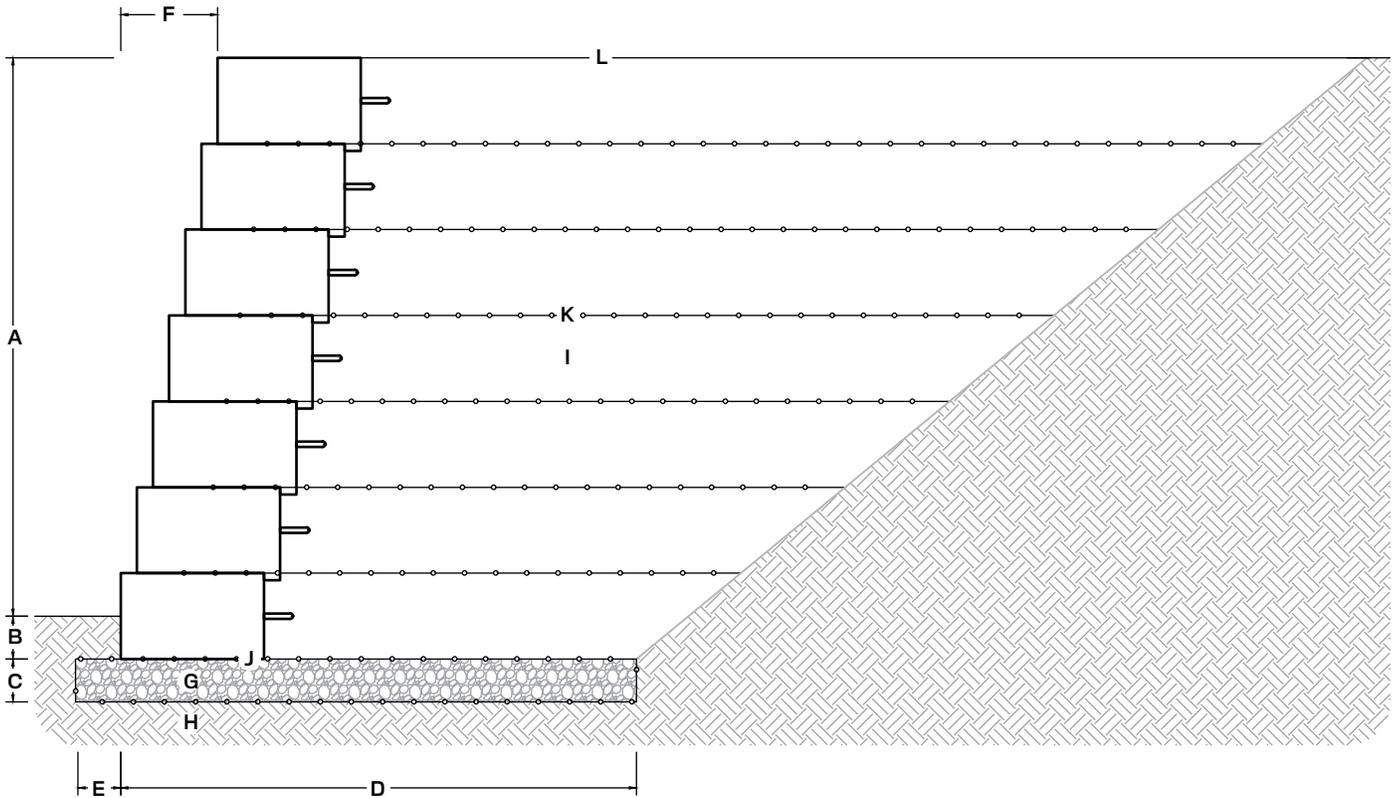


- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Reinforced soil leveling pad (min. height = 7.5% of total wall height)
- D. Leveling pad depth (the greater of 72" or 30% of total wall height)
- E. Leveling pad to extend beyond the face of the wall (min. 7.5% of total wall height)
- F. 2-1/4" setback per 12" vertical (10.6°)
- G. Crushed stone leveling pad, wrapped in woven geotextile
- H. Foundation soil compacted to 95% max. dry density
- I. Well-graded or open graded backfill compacted to 95% max. dry density
- J. Shear heel removed from base block
- K. Geosynthetic reinforcement sandwiched between block courses and extending to the cut slope (typ. woven polypropylene with MARV strength of 4,800 lbs / ft)
- L. Finish grade to drain away from the wall

**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Grand Ledge™ walls. These drawings are representative of major components required in wall construction. Specific details including reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall. For more cross-section and design options, visit our website.


- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.

**TYPICAL GRAVITY RETAINING WALL DETAIL WITH AGGREGATE WEDGE BACKFILL**

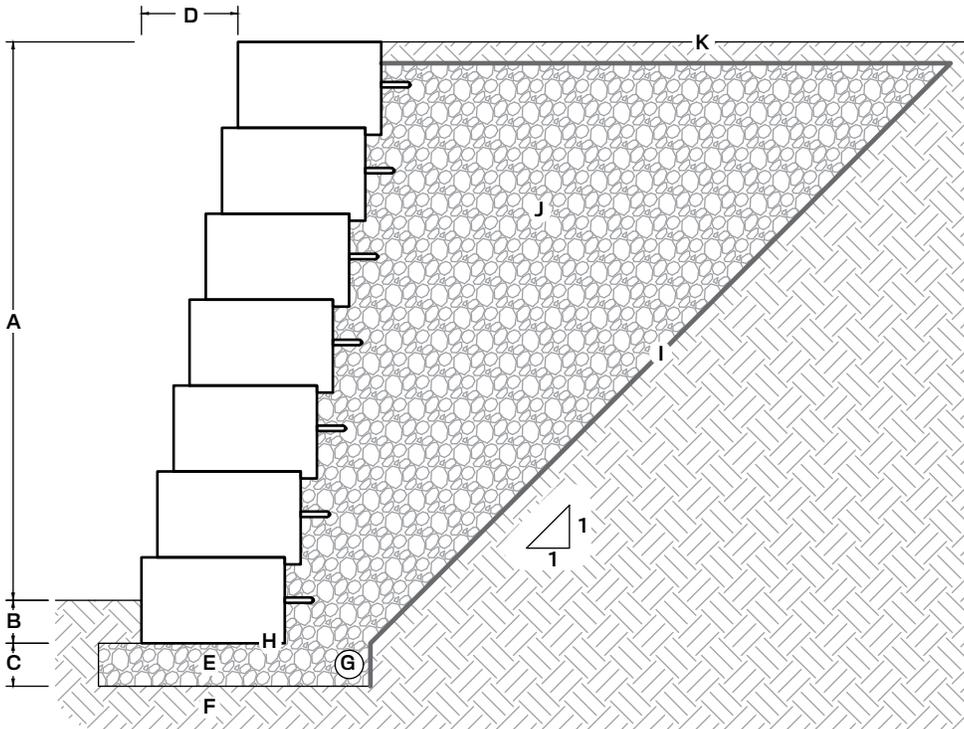

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 2-1/4" setback per 12" vertical (10.6°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12", installed on a 1:1 slope behind wall
- K. Finish grade to drain away from the wall

**TYPICAL RETAINING WALL DETAIL WITH CAST-IN-PLACE CONCRETE BACKFILL**

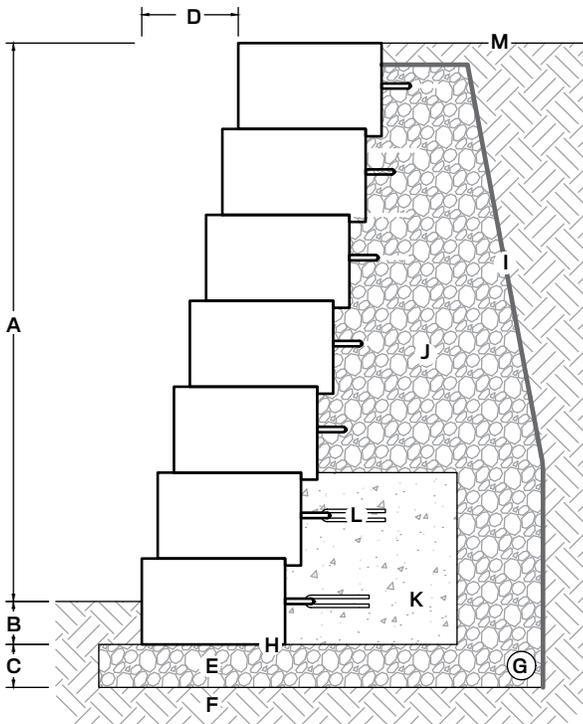

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 2-1/4" setback per 12" vertical (10.6°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. 4" corrugated perforated drain pipe
- H. Shear heel removed from base block
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Drainstone (ASTM #57), min. 12" behind wall and cast-in-place concrete
- K. Cast-in-place redi-mix concrete, min. 2,500 PSI (height and depth vary by design)
- L. #4 Rebar, 18" lengths bent in half (9" embedment), installed on every loop
- M. Finish grade to drain away from the wall



# BELVEDERE®

## FEATURES

- Natural stone texture on both the front and back with multiple face textures for each basic block size to provide a more random look
- Creates both freestanding and retaining walls
- Walls, columns, fire pits and more mean multiple creative possibilities
- Wall blocks are tapered on each side approximately 1" from the front to the back of the block
- Corner blocks are finished on three sides, the fourth side is tapered to fit with the wall blocks
- Corner blocks can be used to construct columns, create finished ends for walls, and make 90° corners
- Belvedere® Caps and Coping available to coordinate with wall product

## MATERIAL WETCAST

### COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)



Refer to our website for the most recent color offerings.


Average block weights of the different face texture patterns are shown. Weights of individual blocks may vary.

## WALL PALLET



Weight: 2,475± lbs (inc. pallet)  
 Coverage (Retaining): 27 sq ft  
 Coverage (Freestanding): 25 sq ft  
 Layers Per Pallet: 6  
 Section: 9 sq ft per 2 layers  
 (1 layer of 6", 1 layer of 3")

Product depth nominally 9".

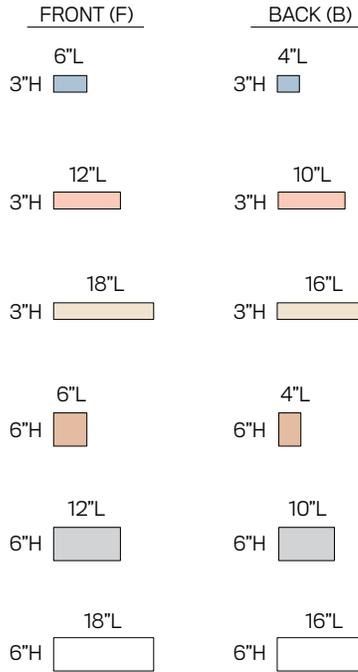

**UNIT: 1**  
 Weight: 10± lbs  
 Units Per Pallet: 12

**UNIT: 2**  
 Weight: 20± lbs  
 Units Per Pallet: 12


**UNIT: 3**  
 Weight: 36± lbs  
 Units Per Pallet: 12

**UNIT: 4**  
 Weight: 21± lbs  
 Units Per Pallet: 12

**UNIT: 5**  
 Weight: 42± lbs  
 Units Per Pallet: 12


**UNIT: 6**  
 Weight: 67± lbs  
 Units Per Pallet: 12

## CORNER PALLET



Weight: 1,520± lbs (inc. pallet)  
 Coverage: 24 sq ft  
 Layers Per Pallet: 4  
 Section: 1.5 sq ft (one 6" piece, one 3" piece)

Product depth nominally 9".

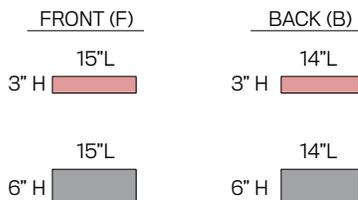

**CORNER UNIT: 7**  
 Weight: 30± lbs  
 Units Per Pallet: 16


**CORNER UNIT: 8**  
 Weight: 58± lbs  
 Units Per Pallet: 16

## RETAINING WALL PATTERNS


Retaining walls are typically constructed with the front face of the block exposed. The v-shaped notches which appear on the back of wall between adjacent blocks must be filled with drainstone. The blocks shown below are labeled. For example, 4F would indicate the front (or longer) face of Unit 4, and 2B would indicate the back (or shorter) face of Unit 2.

### 12" HIGH

(12" high x 13'-6" wall section shown = 13.5 sq ft (1/2 wall pallet))



FACE OF WALL




BACK OF WALL

(Drainstone behind and between blocks)


### 18" HIGH

(18" high x 18'-0" wall section shown = 27 sq ft (1 wall pallet))



### 24" HIGH


(24" high x 16'-0" wall section shown = 32 sq ft (1.2 wall pallet))

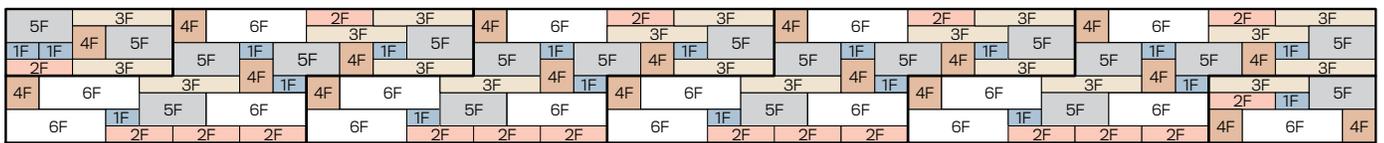

## FREESTANDING WALL PATTERNS

### 24" PATTERN A

(Wall section shown = 24.67 sq ft (approx. 1 wall pallet))

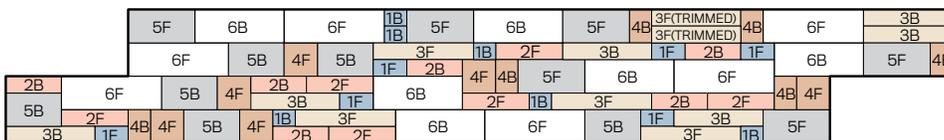

FACE OF WALL




FACE OF WALL

Note: 2" must be trimmed from (2) 18"X3" blocks to make this pattern

### 24" PATTERN B


(Wall section shown = 24.67 sq ft (approx. 1 wall pallet))

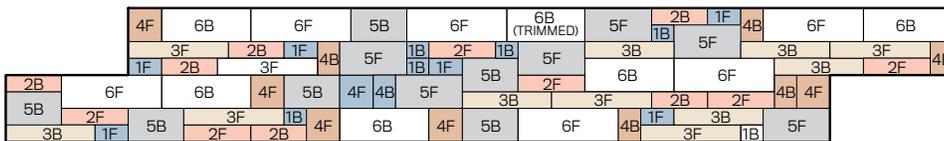

Note: 2" must be trimmed from (1) 18"X6" block to make this pattern


### 24" HIGH VERTICAL END: LEFT

(Wall section shown = 11.67 sq ft (1/2 wall pallet))

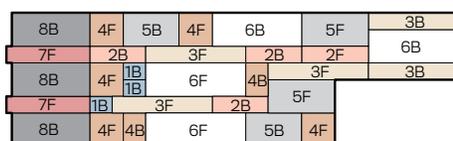

### 24" HIGH VERTICAL END: RIGHT

(Wall section shown = 11.67 sq ft (1/2 wall pallet))

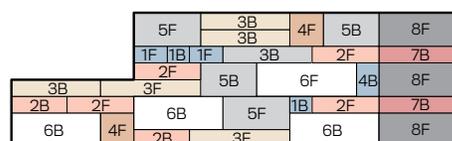

Note: For left and right ends, vertical end jogs in and out approximately 1" between blocks.


**RETAINING WALL CURVES**

This page shows typical construction details for making curved retaining walls with Belvedere® blocks. The taper on the side of the blocks allow for construction of a wide range of curves in both retaining and freestanding walls. Blocks in a retaining wall should be adjusted slightly in place and trimmed as needed to allow wall construction with proper batter. (For clarity, walls are shown below without batter.)


- Minimum radius curves are shown which can be constructed without saw cutting a significant number of blocks. Larger radius curves can be created by leaving a larger gap between blocks on the back side of the wall. The gaps must be filled with drainstone.
- When retaining walls are constructed with batter, the radius on outside curves becomes smaller with each course due to the block setback. For proper construction, the radius of the bottom course must be larger than the minimum radius so upper courses will have sufficient room for construction.
- When retaining walls are constructed with a batter, the radius on inside curves becomes larger with each course due to the block setback.

**OUTSIDE CURVE**

**INSIDE CURVE**

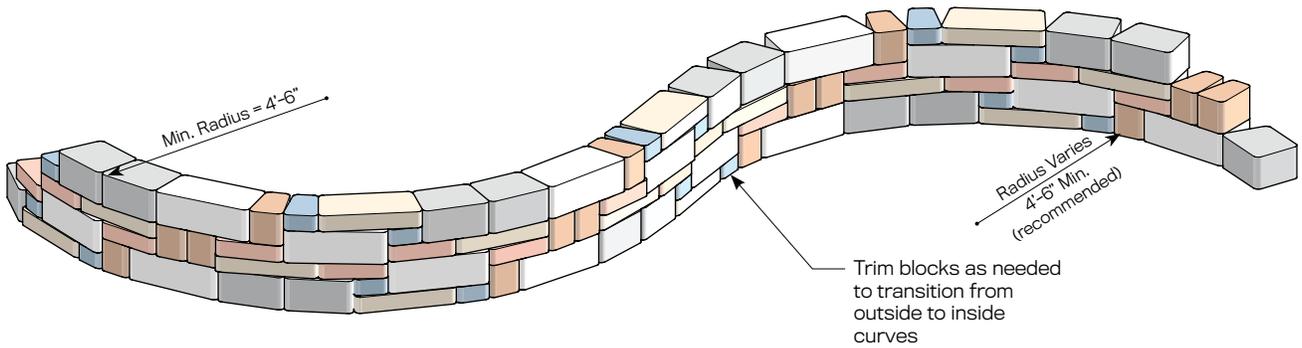

**PLANTER / TREE RING**

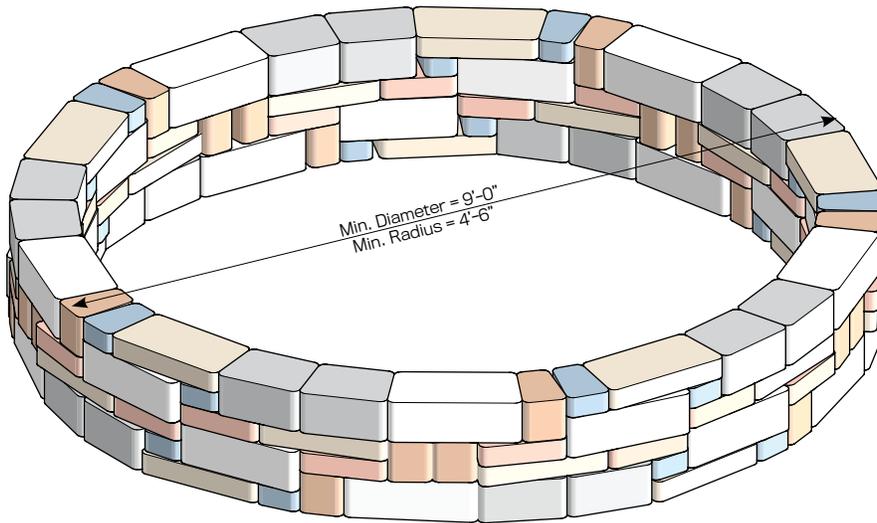

**NOTE: CURVED FREESTANDING WALLS**


Curved freestanding walls can also be built. Typically, the blocks have to be field adjusted to make the desired curve. Front and back faces will alternate and blocks trimmed as needed to provide a tight fit between blocks with no gaps on either side of the freestanding wall.

## RETAINING WALL CORNERS


This page show typical construction details for Belvedere® 90° corners.

- Some basic concepts are shown here for 90° corners. Plan to take some time to properly work corners into the larger retaining and freestanding wall patterns.
- Walls are shown without batter for clarity. Blocks in a retaining wall should be adjusted slightly in place and trimmed as needed to allow wall construction with proper batter.


### OUTSIDE CORNER

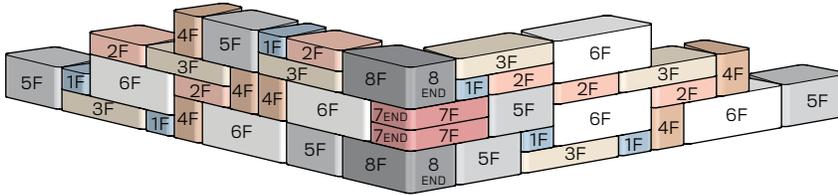

### INSIDE CORNER

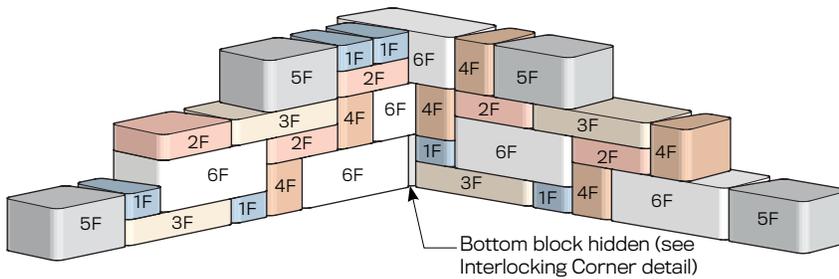

### INTERLOCKING CORNER



Place block in an overlapping, interlocking pattern at corner for added wall stability.

## PILLARS

Pillars make nice ends to freestanding walls, formal stair openings, stand-alone monuments, and other areas to enhance your Belvedere® project. The basic steps of pillar construction are shown here. Feel free to expand on these ideas and bring your own creativity into creating a custom project

#### Step 1

Place (4) 3" or 6" high corner blocks with the taper facing into the center of the pillar.




#### Step 2

Place the second row of (4) of the corner blocks with the taper facing into the center of the pillar. Typically if the first row is built with 6" corner blocks, the second row is built with 3" corner blocks.




#### Step 3

Continue with subsequent rows to the desired pillar height. One pallet of corner blocks will make a 24" x 24" x 36" high column.




#### Step 4

Place a column cap to finish the pillar. The column cap can be cored as needed for installation of a light.



### PILLARS WITH FREESTANDING WALL

Freestanding walls with pillars on each end can be constructed either with the pillars flush with the wall, or blocks trimmed to interlock the end of the wall with the pillar.


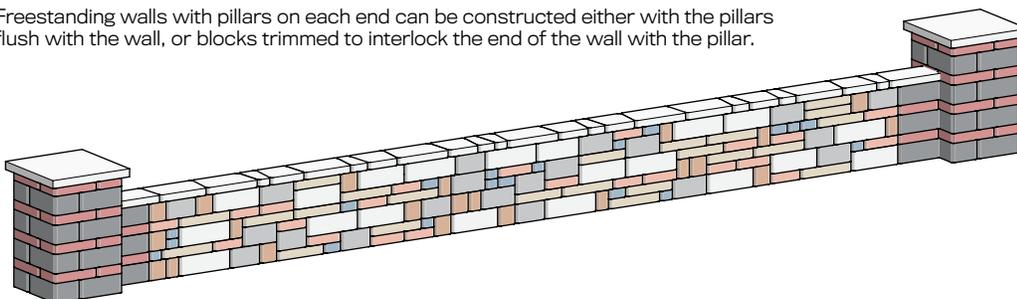


**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Belvedere® walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall.



- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction **must be prepared by a registered professional engineer** using the actual conditions of the proposed site and loads.
- Final wall design must address both internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Block size and placement shown are for reference only, individual Belvedere® blocks will vary with installation pattern.

**TYPICAL FREESTANDING WALL DETAIL**

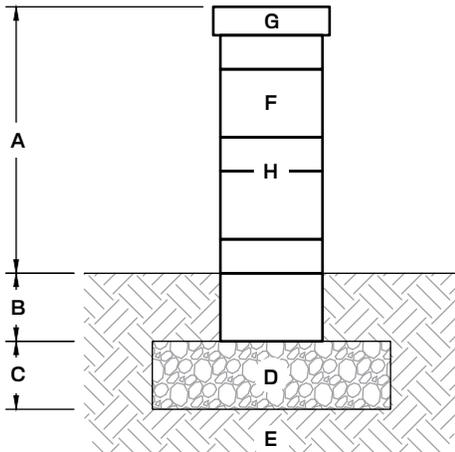


- A. Wall height above grade (max. 24")
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Wall blocks
- G. Cap block
- H. Concrete adhesive required between all blocks and caps

**TYPICAL GRAVITY RETAINING WALL DETAIL**

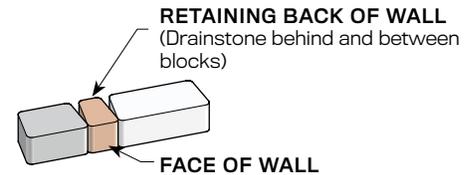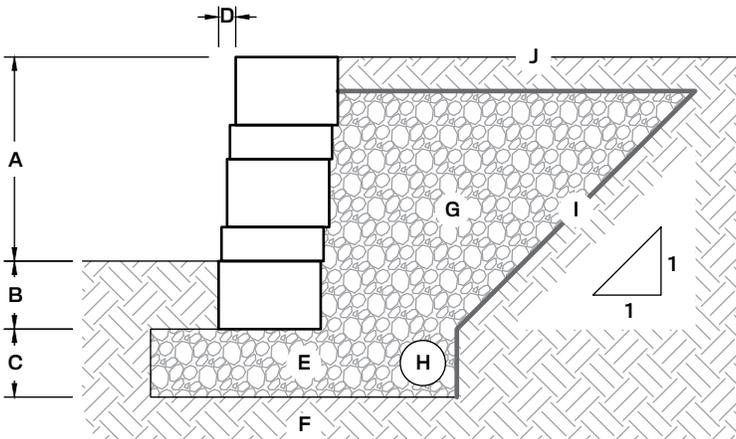

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. 1/2" setback per 6" course (5°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57 on 1:1 slope behind wall)
- H. 4" corrugated perforated drain pipe
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Finish grade to drain away from the wall

**TYPICAL REINFORCED RETAINING WALL DETAIL**

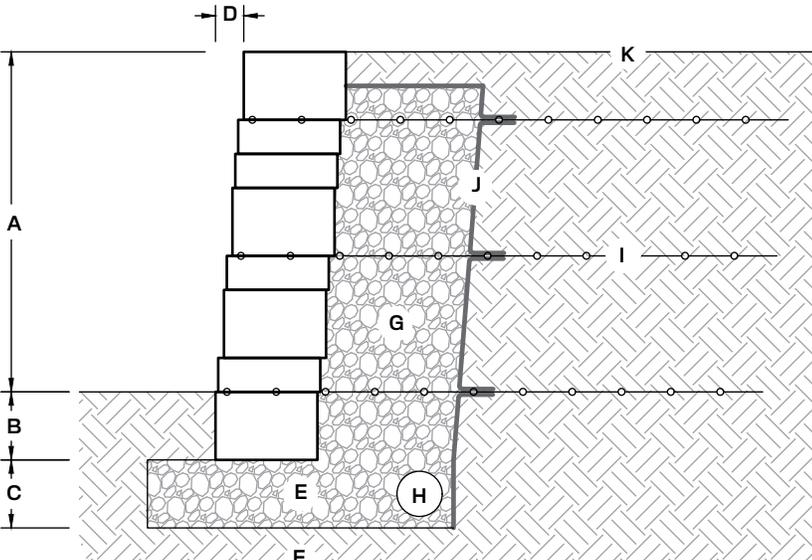

- A. Wall height above grade (varies by design)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 1/2" setback per 6" course (5°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57, min. 12" behind wall)
- H. 4" corrugated perforated drain pipe
- I. Geogrid (lengths and vertical placement per design)
- J. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- K. Finish grade to drain away from the wall

**PRELIMINARY GEOGRID PLACEMENT GUIDE**

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Belvedere® wall blocks in the conditions noted below. The geogrid reinforcement is Mirafi Miragrid 2XT. The geogrid layers shall be placed with 100% coverage along the length of the wall (no gaps between sections of grid). Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- Length of geogrid is measured from the front of the Belvedere® blocks.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum Factors of Safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning, and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Ed.
- Reinforced and backfill soils are to be compacted to 95% maximum dry density (Standard Proctor).
- Block sizes and placement shown are for reference only. Individual Belvedere® Collection blocks will vary with installation pattern.
- All Belvedere® specifications are to be followed.

H = Height From Top of Stone Leveling Pad

L = Length of Geogrid

VP = Vertical Placement (bottom of blocks / top of stone leveling pad)


$\phi = 30^\circ, \gamma = 120 \text{ pcf}$   
(unless noted otherwise)

WALLS

**FINE TO MEDIUM SAND**


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

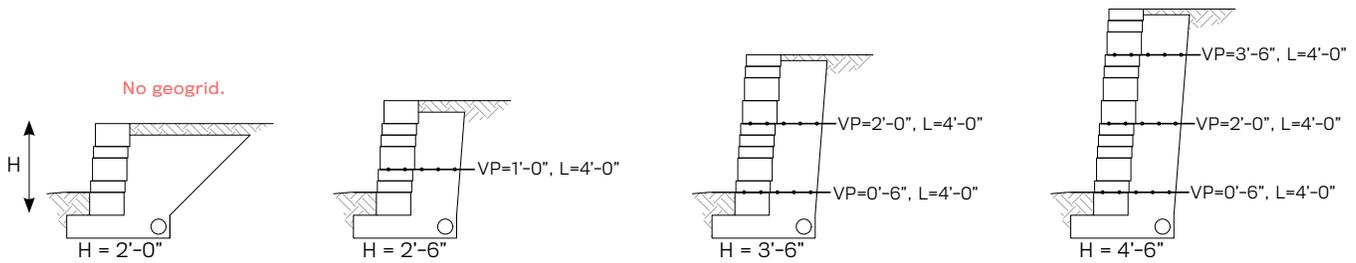


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- 100 PSF SURCHARGE  
(Light traffic only, no trucks)

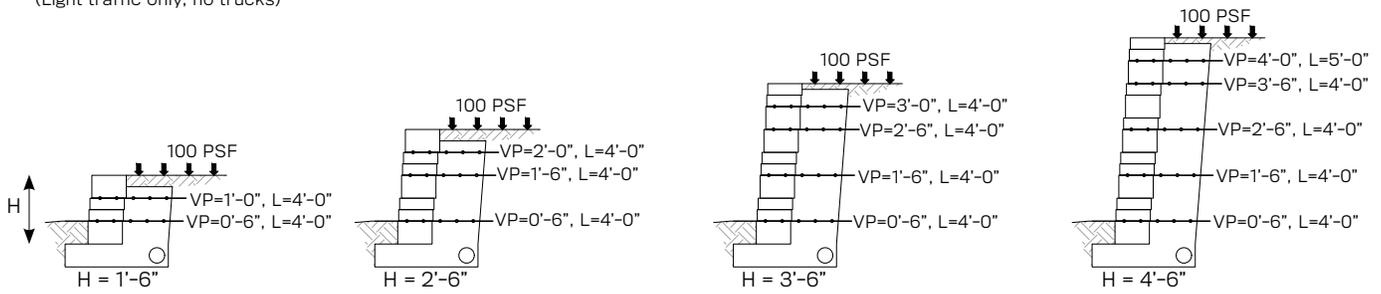

**CONDITIONS**

- 1:3 (18.4°) BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

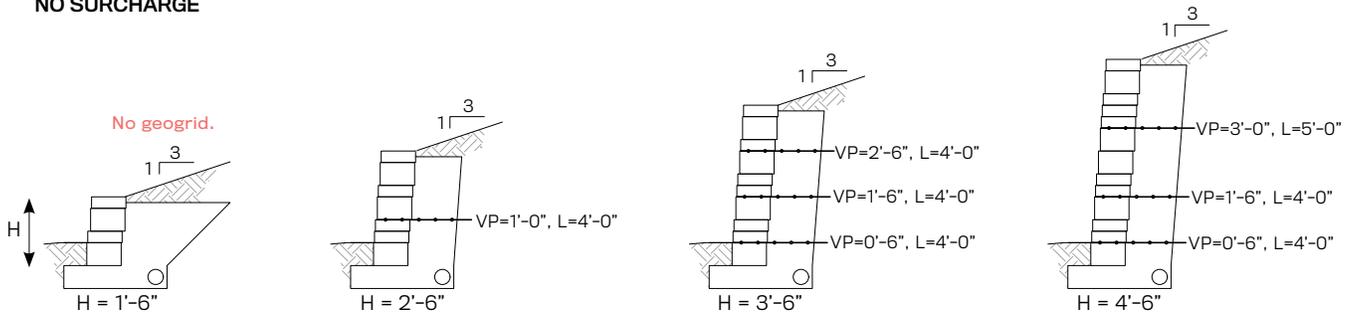

**PRELIMINARY GEOGRID PLACEMENT GUIDE**

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Belvedere® wall blocks in the conditions noted below. The geogrid reinforcement is Mirafi Miragrid 2XT. The geogrid layers shall be placed width 100% coverage along the length of the wall (no gaps between sections of grid). Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- Length of geogrid is measured from the front of the Belvedere® blocks.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum Factors of Safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning, and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 2nd Ed.
- Reinforced and backfill soils are to be compacted to 95% maximum dry density (Standard Proctor).
- Block sizes and placement shown are for reference only. Individual Belvedere® Collection blocks will vary with installation pattern.
- All Belvedere® specifications are to be followed.

H = Height From Top of Stone Leveling Pad

L = Length of Geogrid


VP = Vertical Placement (bottom of blocks / top of stone leveling pad)

$\phi = 28^\circ, \gamma = 120 \text{ pcf}$   
(unless noted otherwise)

**SILTY SAND OR CLAYEY SAND**


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

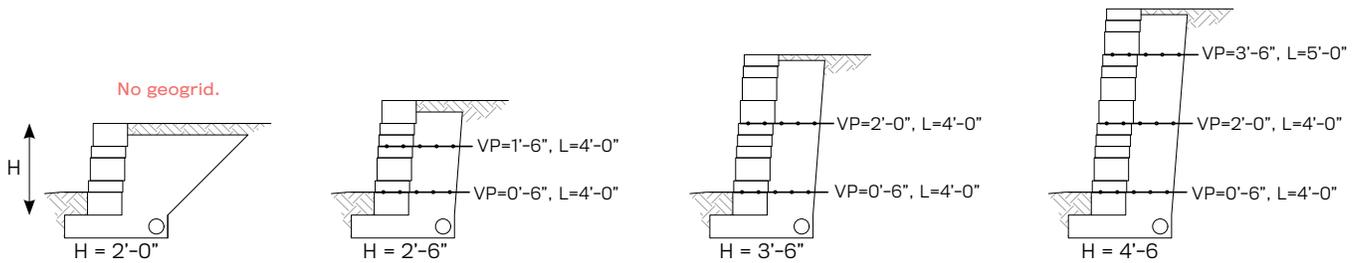


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- 100 PSF SURCHARGE  
(Light traffic only, no trucks)

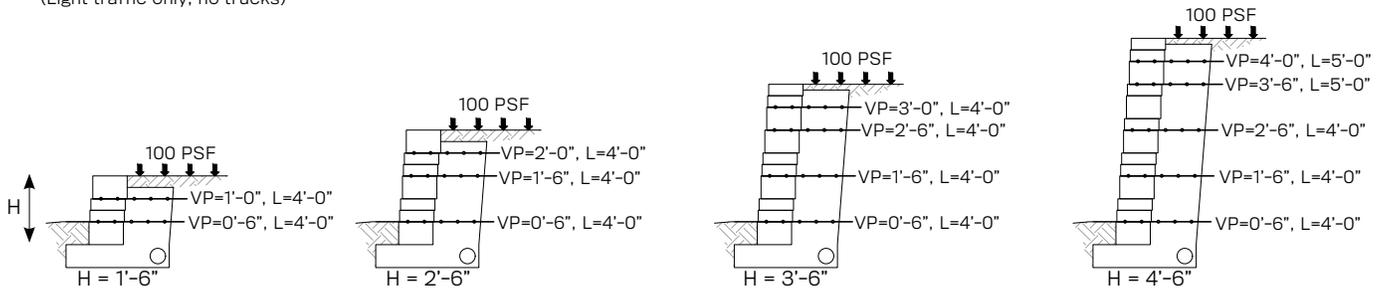

**CONDITIONS**

- 1:3 (18.4°) BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

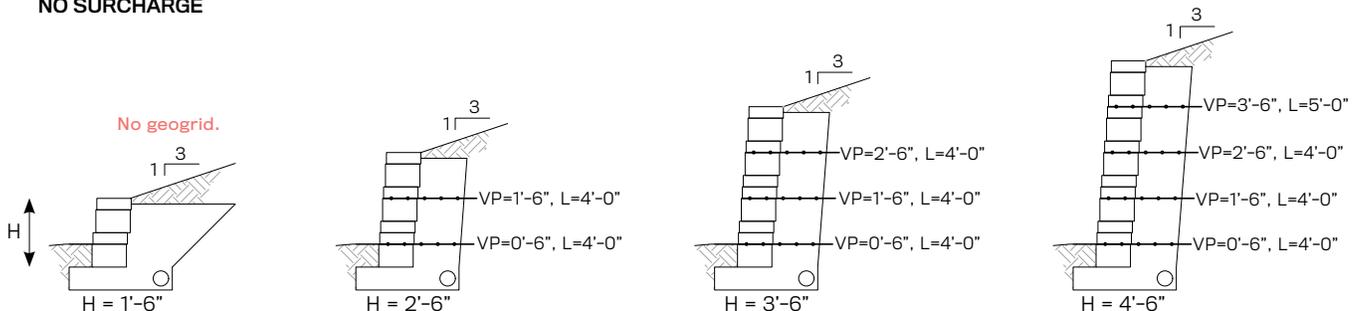



# KODAH®

## FEATURES

- Unique large scale with modern, linear proportions
- Multiple face textures for each block size creates a natural quarried and random look
- Retaining walls and double-sided freestanding walls possible with the wall block. Blocks are finished on both the front and back faces and are tapered on each side approximately 1.5" from the front to the back of the block.
- Corner blocks can be used to construct columns, provide a finished end on a freestanding wall, and make 90° corners. Blocks are finished on three sides, and the fourth side is tapered to fit with the other wall blocks.

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)




Refer to our website for the most recent color offerings.

## WALL PALLET


Block dimensions are nominal.




Weight:	2,500± lbs (inc. pallet)
Coverage (Retaining):	21 sq ft
Coverage (Freestanding):	20 sq ft
Layers Per Pallet:	3
Section:	7 sq ft per layer



<b>UNIT: 1</b>	
Dimensions:	42"L x 10.5"D x 6"H
Weight:	200± lbs
Units Per Pallet:	6



<b>UNIT: 2</b>	
Dimensions:	30"L x 10.5"D x 6"H
Weight:	140± lbs
Units Per Pallet:	3




<b>UNIT: 3</b>	
Dimensions:	21"L x 10.5"D x 6"H
Weight:	100± lbs
Units Per Pallet:	6




<b>UNIT: 4</b>	
Dimensions:	12"L x 10.5"D x 6"H
Weight:	50± lbs
Units Per Pallet:	3

## CORNER PALLET

Block dimensions are nominal.



Weight:	2,500± lbs (inc. pallet)
Coverage:	31.5 sq ft
Layers Per Pallet:	3
Section:	1.3 sq ft per piece



<b>CORNER UNIT</b>	
Dimensions:	21"L x 10.5"D x 6"H
Weight:	100± lbs
Units Per Pallet:	24 (12 left, 12 right)


**CURVES**

This page shows typical construction details for making curved walls with Kodah® blocks. The taper sides of the blocks allow for construction of a wide range of curves in both retaining and freestanding walls. Walls are shown below without batter for clarity. Blocks in a retaining wall should be adjusted slightly in place and trimmed as needed to allow wall construction with proper batter.

- Minimum radius curves are shown which can be constructed without saw cutting a significant number of blocks. Larger radius curves can be created by leaving a larger gap between blocks on the back side of the wall. The gaps must be filled with drainstone.
- When retaining walls are constructed with batter, the radius on outside curves becomes smaller with each course due to the block setback. For proper construction, the radius of the bottom course must be larger than the minimum radius so upper courses will have sufficient room for construction.
- When retaining walls are constructed with a batter, the radius on inside curves becomes larger with each course due to the block setback.

**OUTSIDE CURVE**

**INSIDE CURVE**

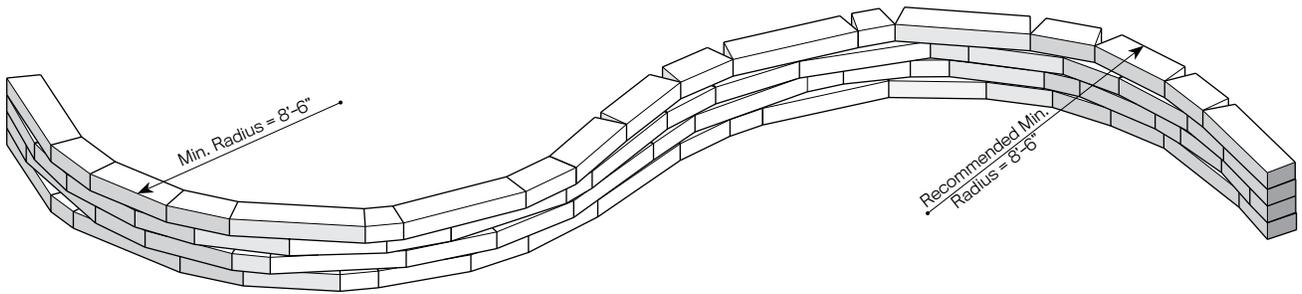

**PILLARS**

Kodah® pillars can be constructed utilizing 1 full pallet of Kodah® Corner Blocks. A 34" Column Cap can be utilized to finish the pillar. The column cap can be cored as needed to accommodate the installation of a lamp.

**Step 1**

Place (4) Kodah® Corner Blocks with the same taper, facing into the center of the pillar.

**Step 2**





Place a second row of (4) Kodah® Corner Blocks with the opposite taper, facing into the center of the pillar.

**Step 3**

Continue with subsequent rows to the desired pillar height. One pallet of corner blocks will create a 32" x 32" x 36" tall column.

**Step 4**

Place a column cap to finish the pillar. The column cap can be cored as needed for installation of a light.





**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Kodah® walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall.



- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site.
- Final wall design must address both internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.

**TYPICAL FREESTANDING WALL DETAIL**

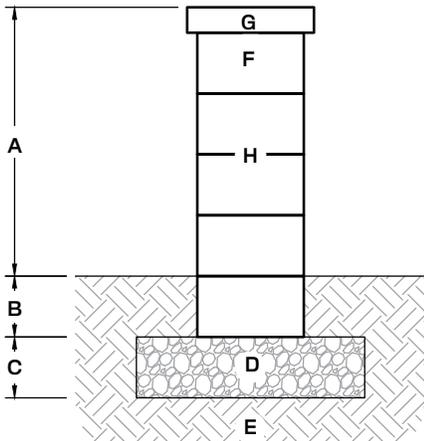


- FREESTANDING FACE OF WALL**
- A. Wall height above grade (max. 24")
  - B. Wall buried beneath grade (min. 6")
  - C. Leveling pad depth (min. 6")
  - D. Crushed stone leveling pad
  - E. Foundation soil compacted to 95% max. dry density
  - F. Wall blocks
  - G. Cap block
  - H. Concrete adhesive required between all blocks and caps

**TYPICAL GRAVITY RETAINING WALL DETAIL**

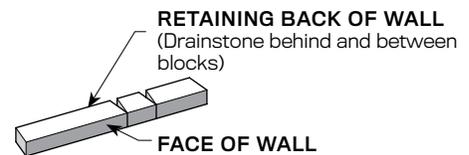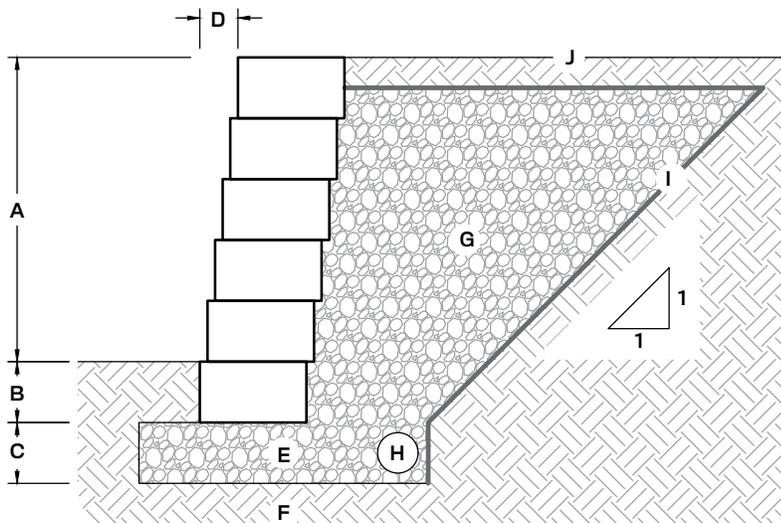

- RETAINING BACK OF WALL (Drainstone behind and between blocks)**
- FACE OF WALL**
- A. Wall height above grade (varies)
  - B. Wall buried beneath grade (min. 6")
  - C. Leveling pad depth (min. 6")
  - D. 3/4" setback per course (7°)
  - E. Crushed stone leveling pad
  - F. Foundation soil compacted to 95% max. dry density
  - G. Drainstone (ASTM #57 on 1:1 slope behind wall)
  - H. 4" corrugated perforated drain pipe
  - I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
  - J. Finish grade to drain away from the wall

**TYPICAL REINFORCED RETAINING WALL DETAIL**

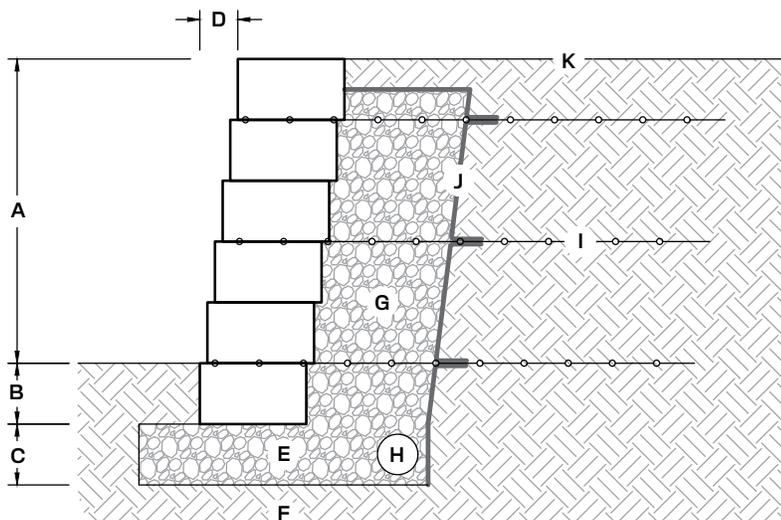

- A. Wall height above grade (varies by design)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 3/4" setback per course (7°)
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57, min. 12" behind wall)
- H. 4" corrugated perforated drain pipe
- I. Geogrid (lengths and vertical placement per design)
- J. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- K. Finish grade to drain away from the wall

**PRELIMINARY GEOGRID PLACEMENT GUIDE**

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Kodah® blocks in the conditions noted below. The geogrid reinforcement is Mirafi Miragrid 3XT. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed on TOP of the course of blocks shown. For example, a 5' label on the Geogrid indicates that you place a 5' long layer of geogrid on top of that course of blocks.
- Length of geogrid is measured from the front of the Kodah® blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 3rd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Kodah® Specifications are to be followed.


H = Height From Top of Stone Leveling Pad

**DENSE WELL-GRADED SAND, SAND AND GRAVEL**

$\phi = 34^\circ$ ,  $\gamma = 120$  pcf  
(unless noted otherwise)


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

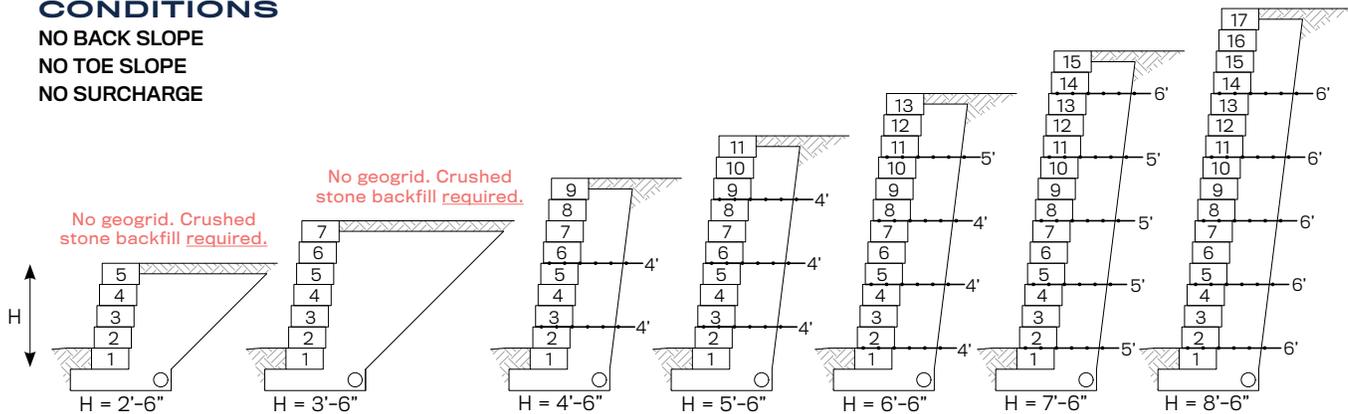


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- 100 PSF SURCHARGE  
(Light traffic only, no trucks)

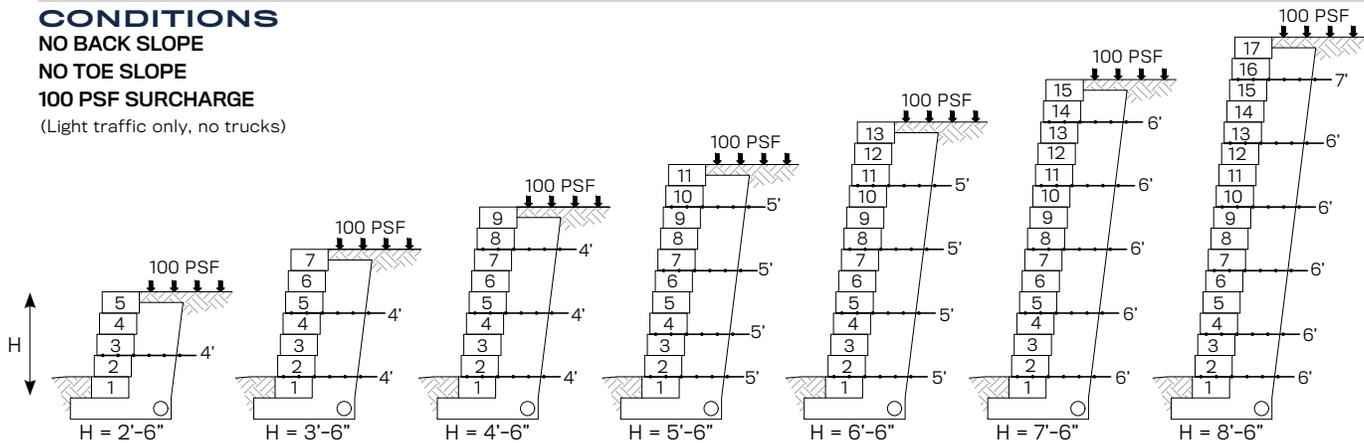

**CONDITIONS**

- 1:3 (18.4°) BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

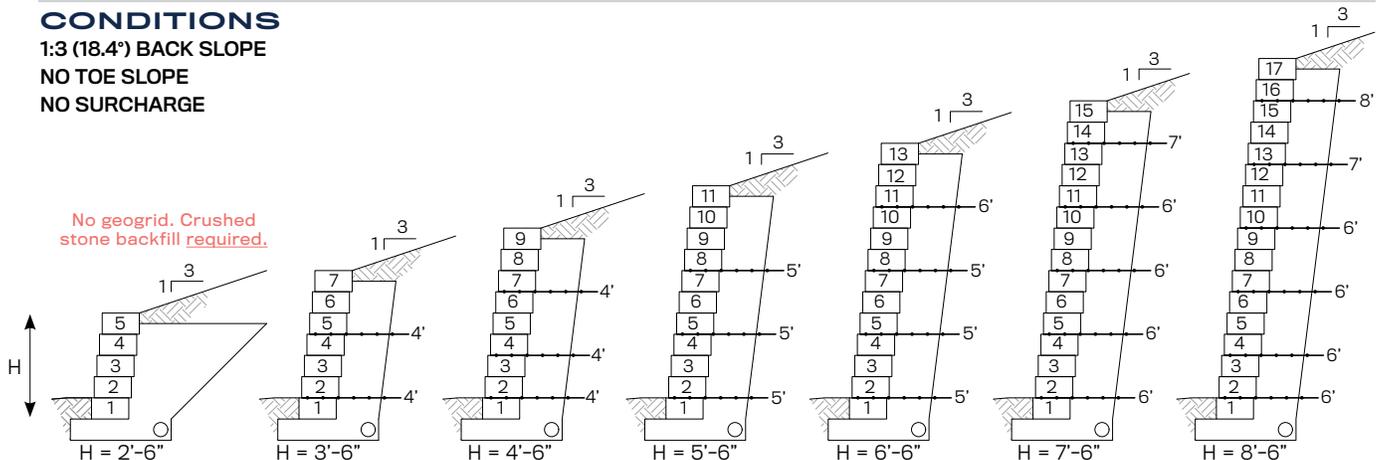

**PRELIMINARY GEOGRID PLACEMENT GUIDE**

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Kodah® blocks in the conditions noted below. The geogrid reinforcement is Mirafi Miragrid 3XT. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed on TOP of the course of blocks shown. For example, a 5' label on the Geogrid indicates that you place a 5' long layer of geogrid on top of that course of blocks.
- Length of geogrid is measured from the front of the Kodah® blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 3rd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Kodah® Specifications are to be followed.


H = Height From Top of Stone Leveling Pad

**FINE TO MEDIUM SAND**

$\phi = 30^\circ, \gamma = 120 \text{ pcf}$   
(unless noted otherwise)


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

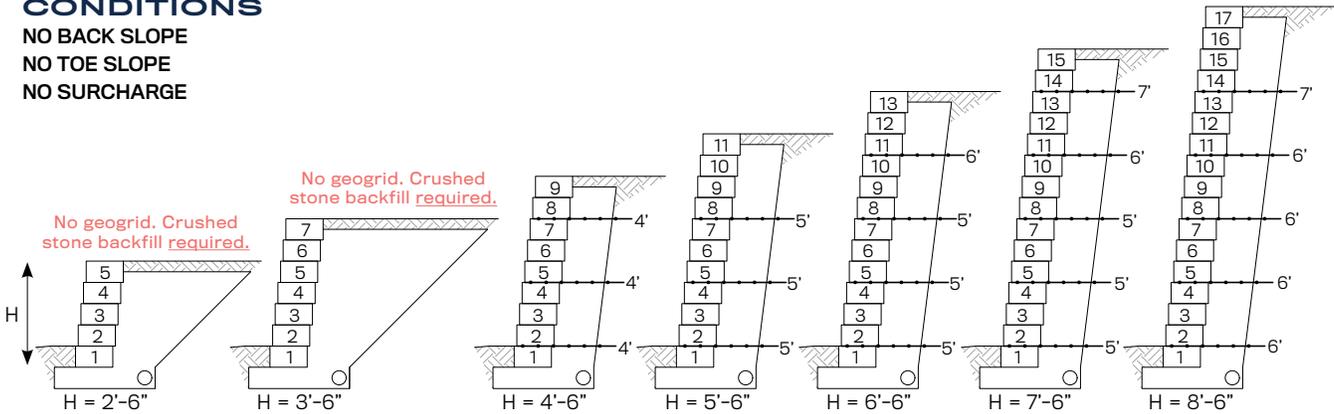


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- 100 PSF SURCHARGE  
(Light traffic only, no trucks)

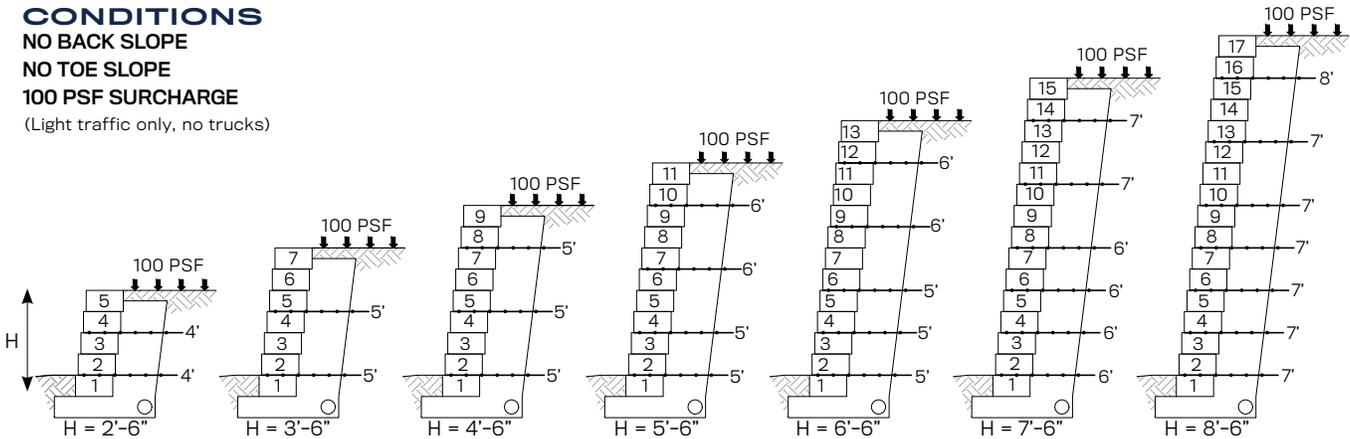

**CONDITIONS**

- 1:3 (18.4°) BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

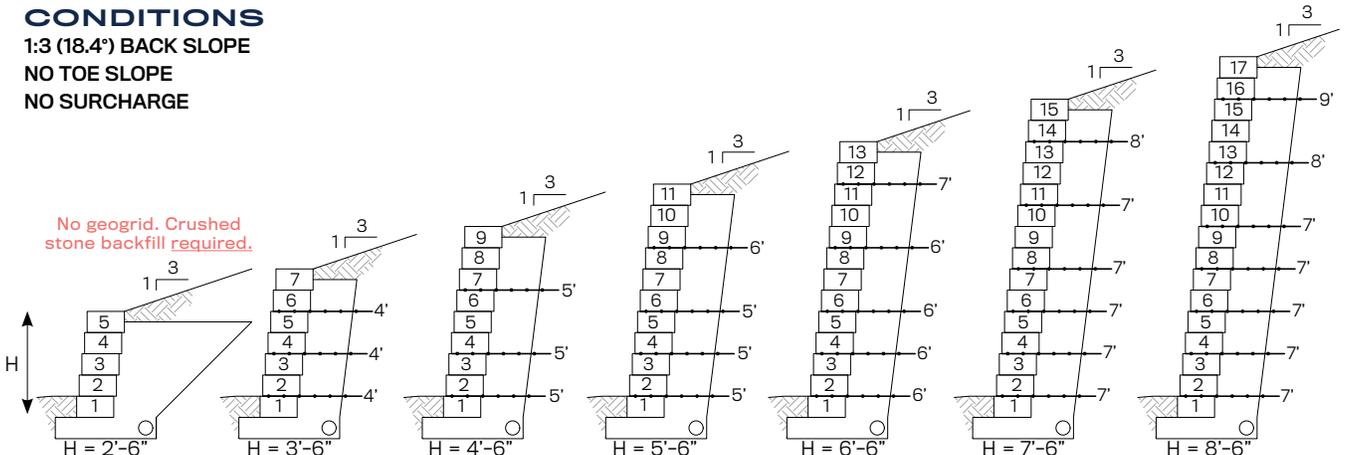

**PRELIMINARY GEOGRID PLACEMENT GUIDE**

This page shows preliminary guides for soil reinforcement required to construct a wall with HIGH FORMAT® Kodah® blocks in the conditions noted below. The geogrid reinforcement is Mirafi Miragrid 3XT. Refer to typical wall sections for all other details.

- These drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site. Wall stability, including global stability, must be verified for site specific conditions.**
- Final wall design must address internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.
- Geogrid layers are to be placed on TOP of the course of blocks shown. For example, a 5' label on the Geogrid indicates that you place a 5' long layer of geogrid on top of that course of blocks.
- Length of geogrid is measured from the front of the Kodah® blocks.
- Slope stability and seismic conditions are not included in these guides and must be analyzed based on site specific conditions.
- These guides assume a flat "toe" slope at the bottom of the wall. Toe slopes must be analyzed based on site conditions.
- Minimum factors of safety for the assumed conditions shown above are 1.5 for sliding, 2.0 for overturning (1.5 for non-reinforced section), and 2.0 for bearing capacity.
- Designs are in general accordance with NCMA's Design Manual for Segmental Retaining Walls, 3rd Edition.
- Reinforced and backfill soils are to be compacted to 95% maximum density (Standard Proctor).
- All Kodah® Specifications are to be followed.


H = Height From Top of Stone Leveling Pad

**SILTY SAND, CLAYEY SAND**

$\phi = 28^\circ, \gamma = 120 \text{ pcf}$   
(unless noted otherwise)


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

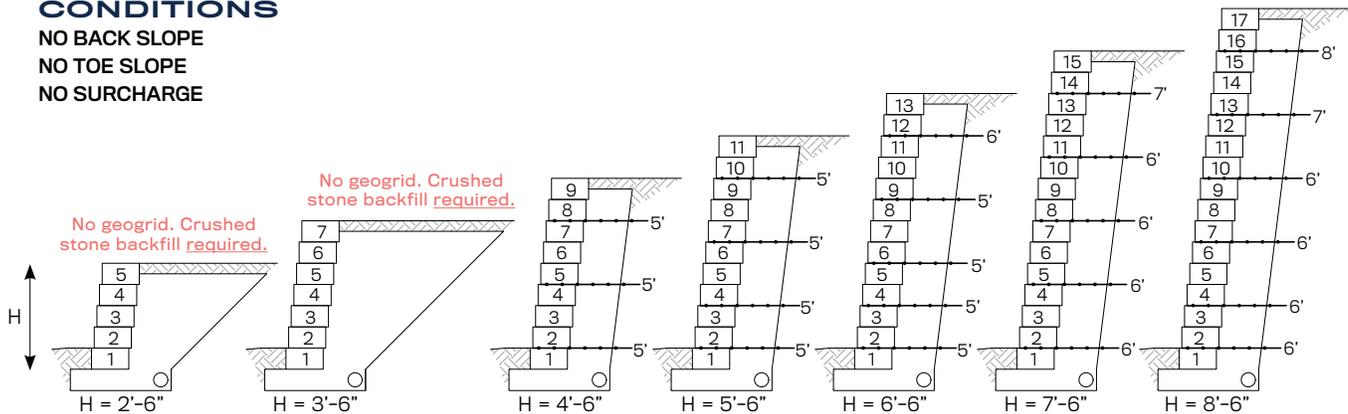


**CONDITIONS**

- NO BACK SLOPE
- NO TOE SLOPE
- 100 PSF SURCHARGE  
(Light traffic only, no trucks)

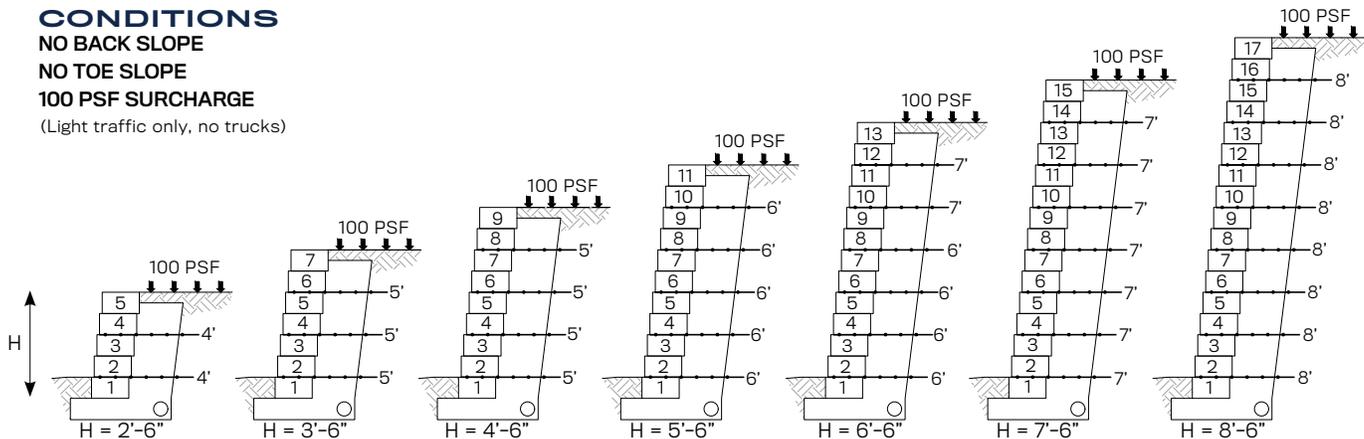

**CONDITIONS**

- 1:3 (18.4°) BACK SLOPE
- NO TOE SLOPE
- NO SURCHARGE

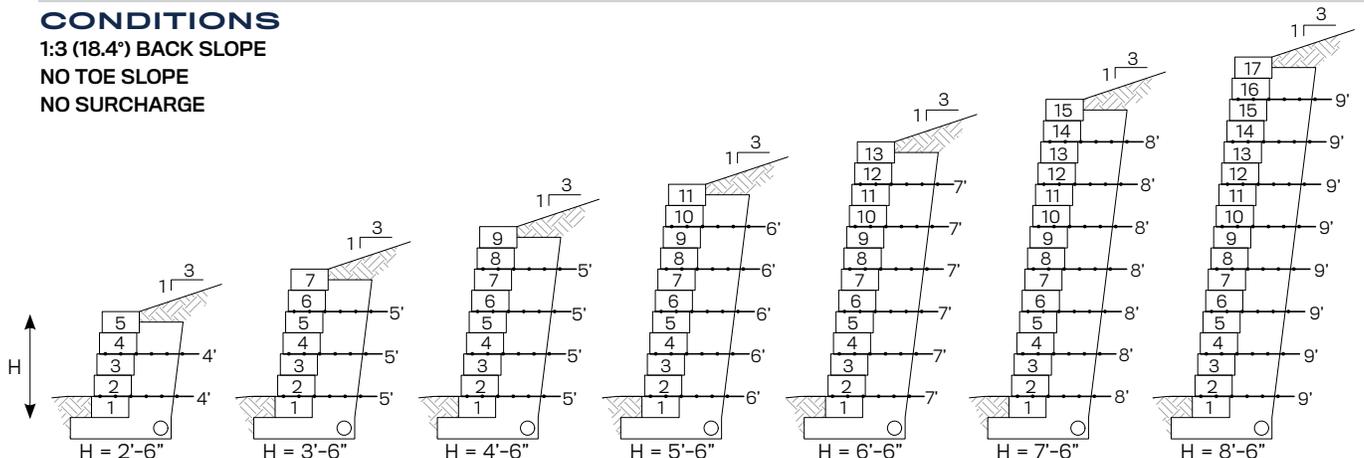

# CLAREMONT®

## FEATURES

- Linear, horizontal proportions evoke a contemporary yet classic stone appearance
- Each unit is finished on both the front and back surfaces, allowing for both freestanding and retaining walls
- Crisp and chiseled stone texture is indistinguishable from natural snapped limestone drywall
- One corner pallet contains enough corners to build a 30"x30" pillar, 40" tall
- Pillar caps sold separately

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY






AUBURN RIDGE  
(Special Order)



Refer to our website for the most recent color offerings.

## WALL PALLET



Weight: 2,800± lbs (inc. pallet)  
 Coverage: 29 sq ft  
 Layers Per Pallet: 5  
 Section: 1.16 sq ft (1 ea 18" and 1 ea 24")



### UNIT: 18"

Dimensions: 18"L x 8"D x 4"H  
 Weight: 43± lbs  
 Units Per Pallet: 25

### UNIT: 24"

Dimensions: 24"L x 8"D x 4"H  
 Weight: 61± lbs  
 Units Per Pallet: 25

## CORNER PALLET



Weight: 2,200± lbs (inc. pallet)  
 Coverage: 33.3 sq ft  
 Layers Per Pallet: 4  
 Section: .83 sq ft equals 1 piece (section sold by the piece)


### UNIT: CORNER

Dimensions: 22"L x 8"D x 4"H  
 Weight: 53± lbs  
 Units Per Pallet: 40

**CURVES**

The minimum radius without cutting is 28' to the outside of the curve. Wall aesthetics can be improved by using a radius larger than the minimum required.

**OUTSIDE CURVE**

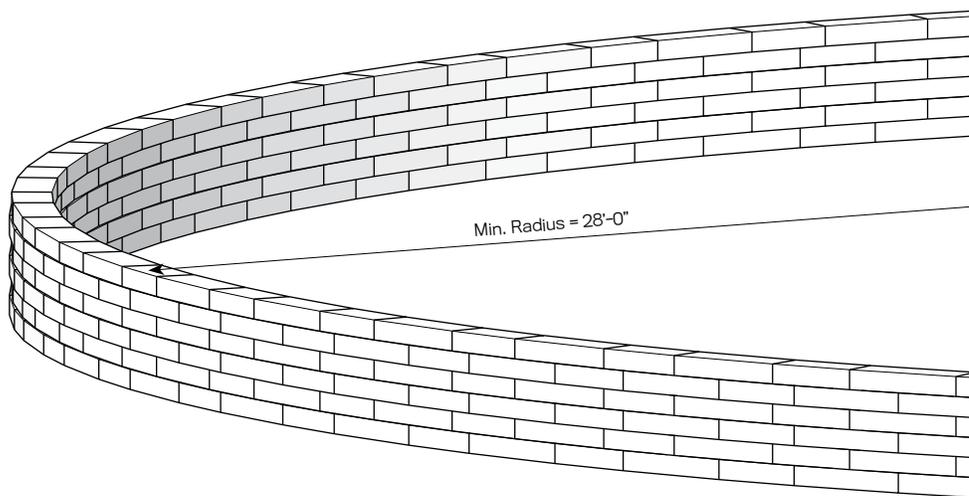


**PILLARS**

Pillars make nice ends to freestanding walls, formal stair openings, stand-alone monuments, and other areas to enhance your Claremont® project. The basic steps of pillar construction are shown here. Feel free to expand on these ideas and bring your own imagination into creating a custom project.

**Step 1**

Place (4) Claremont® Corner Blocks with the texture facing outward.




**Step 2**

Place a second row of (4) Claremont® Corner Blocks with the texture facing outward.




**Step 3**

Continue with subsequent rows to the desired pillar height. One pallet of corner blocks will create a 30" x 30" x 40" tall column.



**Step 4**

Place a column cap to finish the pillar. The column cap can be cored as needed for installation of a light.




**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Claremont® walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall.


- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction **must be prepared by a registered professional engineer** using the actual conditions of the proposed site and loads.
- Final wall design must address both internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.

**TYPICAL FREESTANDING WALL DETAIL**

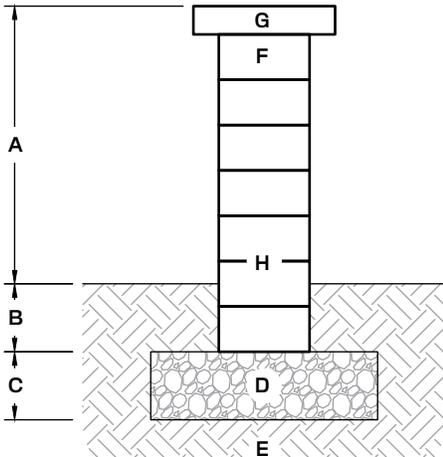


- A. Wall height above grade (max. 24")
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Wall blocks
- G. Cap block
- H. Concrete adhesive required between all blocks and caps

**TYPICAL GRAVITY RETAINING WALL DETAIL**

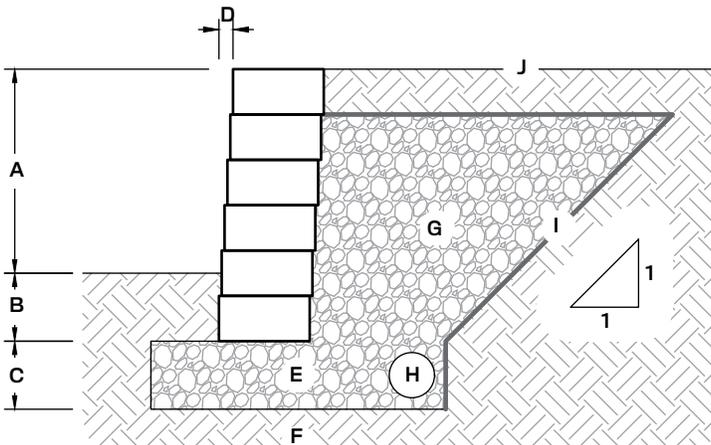

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. 1/4" setback per course (4")
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57 on 1:1 slope behind wall)
- H. 4" corrugated perforated drain pipe
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Finish grade to drain away from the wall

**TYPICAL REINFORCED RETAINING WALL DETAIL**

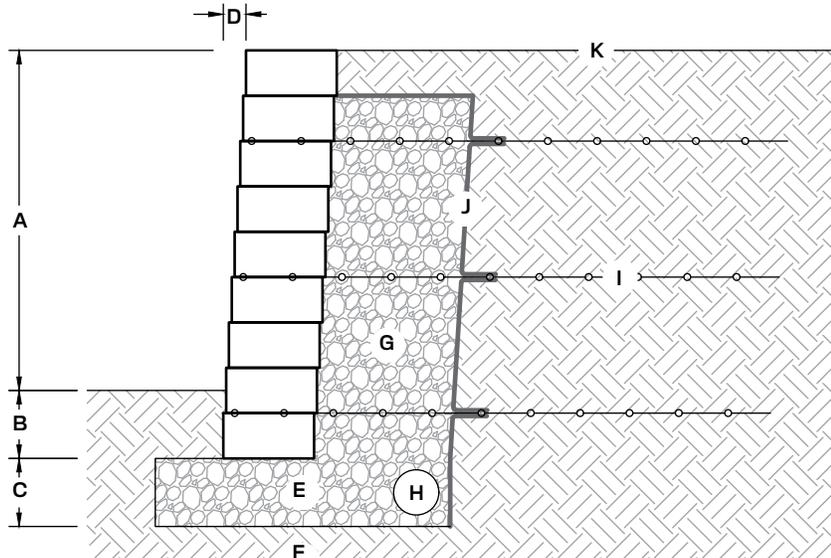

- A. Wall height above grade (varies by design)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 1/4" setback per course (4")
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57, min. 12" behind wall)
- H. 4" corrugated perforated drain pipe
- I. Geogrid (lengths and vertical placement per design)
- J. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- K. Finish grade to drain away from the wall




# DIMENSIONAL


## FEATURES

- Perfect for small garden and freestanding walls, custom bar and grill units, edging, columns and more
- Small and lightweight units for easy stacking
- Natural stone texture on four sides
- Wedge units for curved walls and edging

## STRAIGHT PALLET



Weight:	2,100± lbs (inc. pallet)
Coverage (Retaining):	25 sq ft
Coverage (Freestanding):	25 sq ft
Layers Per Pallet:	5
Section:	sold by the piece



### UNIT: STRAIGHT

Dimensions:	12"L x 8"D x 4"H
Weight:	28± lbs
Units Per Pallet:	75

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)




Refer to our website for the most recent color offerings.

Actual weight and volumes may vary. Weight shown is based on concrete.

## WEDGE PALLET



Weight:	2,000± lbs (inc. pallet)
Coverage (Retaining):	33.3 sq ft
Coverage (Freestanding):	27 sq ft
Layers Per Pallet:	5
Section:	sold by the piece




### UNIT: WEDGE

Dimensions (Front):	12"L x 8"D x 4"H
Dimensions (Back):	7.5"L x 8"D x 4"H
Weight:	20± lbs
Units Per Pallet:	100


## CURVES

The minimum radius using the Wedge block without cutting is 2'. Wall aesthetics can be improved by using a radius larger than the minimum required.


**2'-0" Radius**  
(Wedge Blocks)

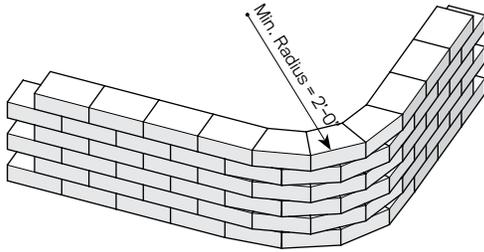


**3'-0" Radius**  
(2:1 Wedge to Straight Blocks)

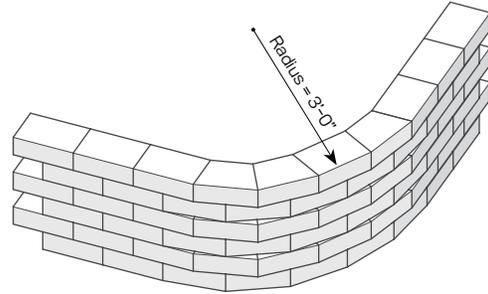

**4'-0" Radius**  
(1:1 Wedge to Straight Blocks)

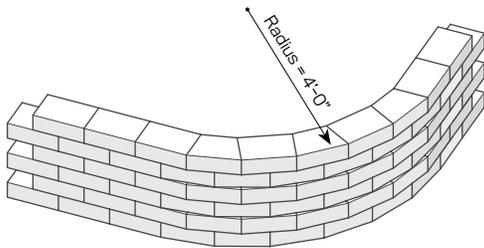

**6'-0" Radius**  
(2:1 Straight to Wedge Blocks)

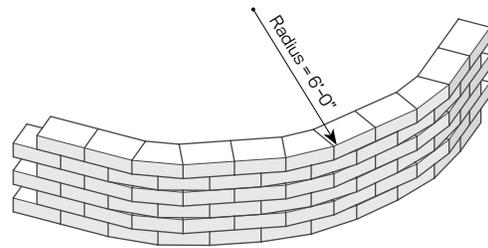


## PILLARS

Pillars make wall ends to freestanding walls, formal stair openings, stand-alone monuments, and other areas to enhance your Dimensional project. The basic steps of pillar construction are shown here. Feel free to expand on these ideas and bring your own imagination into creating a custom project.


**Step 1**

Place (4) Dimensional Blocks.




**Step 2**

Place a second row of (4) Dimensional Blocks.




**Step 3**

Continue with subsequent rows to the desired pillar height. One pallet of corner blocks will create two 20" x 20" x 36" tall columns.



**Step 4**

Place a column cap to finish the pillar. The column cap can be cored as needed for installation of a light.




**GENERAL NOTES FOR WALL SECTIONS**

This page shows typical construction details for Dimensional walls. These drawings are representative of major components required in wall construction. Specific details including geotextile reinforcement layers, drainage details, soil requirements, etc. shall be per engineered design for wall.


- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction **must be prepared by a registered professional engineer** using the actual conditions of the proposed site and loads.
- Final wall design must address both internal and external drainage and shall be evaluated by the professional engineer who is responsible for the wall design.

**TYPICAL FREESTANDING WALL DETAIL**

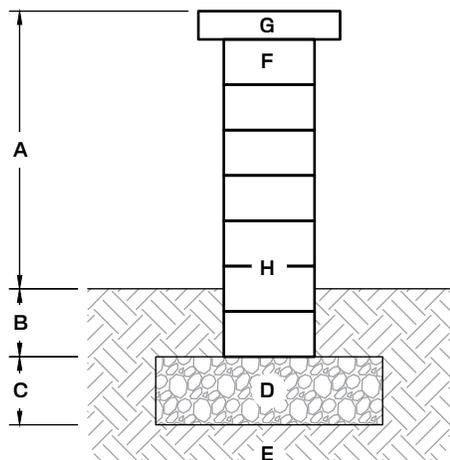


- A. Wall height above grade (max. 24")
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Wall blocks
- G. Cap block
- H. Concrete adhesive required between all blocks and caps

**TYPICAL GRAVITY RETAINING WALL DETAIL**

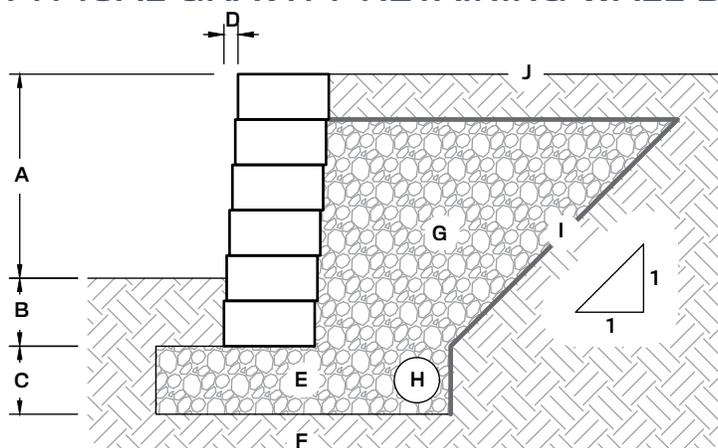

- A. Wall height above grade (varies)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. 1/4" setback per course (4")
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57 on 1:1 slope behind wall)
- H. 4" corrugated perforated drain pipe
- I. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- J. Finish grade to drain away from the wall

**TYPICAL REINFORCED RETAINING WALL DETAIL**

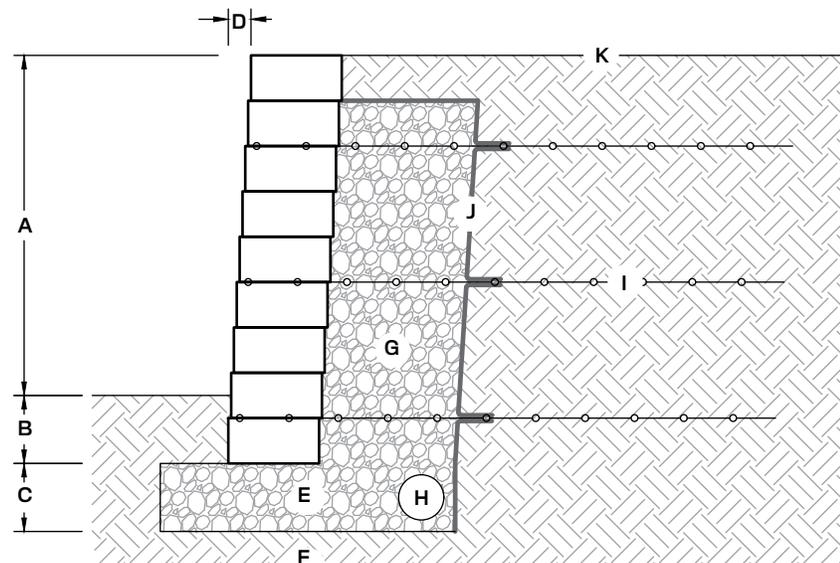

- A. Wall height above grade (varies by design)
- B. Wall buried beneath grade (varies by design)
- C. Leveling pad depth (varies by design)
- D. 1/4" setback per course (4")
- E. Crushed stone leveling pad
- F. Foundation soil compacted to 95% max. dry density
- G. Drainstone (ASTM #57, min. 12" behind wall)
- H. 4" corrugated perforated drain pipe
- I. Geogrid (lengths and vertical placement per design)
- J. Min. 3.5 oz. non-woven geotextile fabric (recommended)
- K. Finish grade to drain away from the wall

# SLABS & PAVERS

GENERAL INFORMATION  
GAUGE SELECT  
MID-CENTURY  
MONTROSE  
GRAND FLAGSTONE  
DIMENSIONAL FLAGSTONE  
NEW MISSION  
AMARO®  
SUPERIOR STEPPERS



## INSTALLATION GUIDE

BASIC SLAB INSTALLATION  
NOTES FOR:

- Gauge Select
- Mid-Century
- Montrose

Refer to product pages for specific information and details pertaining to individual products.

**FOR THE MOST NATURAL APPEARANCE, MIX AND INSTALL PRODUCTS FROM MULTIPLE PALLETS SIMULTANEOUSLY. THIS WILL CREATE A MORE BLENDED, NATURAL LOOK.**

## SAFETY

Make safety your top priority when installing our paving products. Before starting your project, be sure to address the following points:

Contact your local utility marking service prior to making any excavation. Be sure to follow all governmental safety regulations.

Always wear the appropriate personal protective equipment (PPE) including gloves, steel toed boots, safety glasses, hearing protection, respiratory protection, and any other needed safety gear.

Gauge Select, Mid-Century and Montrose slabs are heavy. Utilize mechanical installation when possible. Follow proper lifting techniques to avoid back injury. Also, use two people to set larger pieces.

## PROJECT PLANNING

The first step in installing our paving products is to plan your project. Slab layout and placement is important to insure a functional and good looking installation. Remember, Gauge Select, Mid-Century and Montrose products are suitable for pedestrian loading only (patios, walkways, etc.) and will not support the load of a vehicle.

## EXCAVATION AND BASE PREPARATION

Once you are ready to start construction, you will need to lay out the project area. Mark out the area of the installation with marking paint. Mark a second line 12" (305 mm) outside of the first line that indicates the area to be excavated. This over-excavation will allow for proper base installation.

Excavate to the required depth and grade for the installation of the specific paving product you are installing (see cross sections for minimum recommended excavation depths). Remove all topsoil, organic, or otherwise unsuitable soil and replace with compacted granular soil. Once the excavation depth has been established, compact the sub-grade well using a vibratory plate compactor. At this point, HIGH FORMAT® recommends laying a woven geotextile down before applying any granular base materials.

## PLACE THE COMPACTED GRAVEL BASE

- Fill the compacted sub-base with a minimum 4-inches of dense graded road aggregate. Compact with a vibratory plate compactor.
- Install low-profile paver edging around the perimeter of the patio. Fill with 1-inch of clean, washed bedding sand. Screed flat using screed rails and a screed board. Remember to maintain a  $\pm 1\%$  pitch for proper surface water management.

**Use of aggregates other than sand is not recommended for the bedding layer. Coarse aggregates can create point-loads beneath large-surface slabs, and may damage the finished patio.**

## SLAB INSTALLATION

Begin by laying the individual pavers on screeded bedding material according to the installation pattern or detailed project plan.

- When the project requires more than one pallet of Slabs, pull slabs from multiple pallets simultaneously. This will ensure the best blending of color on the project.
- Because Gauge Select, Mid-Century and Montrose Slabs are so large, it may be necessary to step on the base during installation. To avoid disturbing the bedding sand, place a mason's kneeler board where you need to step on the base. This will distribute your weight more evenly.
- If any slabs require trimming, place them on a flat, evenly supported surface. Use the cut-off saw to score the surface of the slab  $\pm \frac{1}{4}$ -inch across entire length of the cut before plunging through the slab. This will reduce the chance of slabs fracturing outside the score-line. Joints can consist of polymeric sand, decorative aggregate, turf, and bricks or pavers. Be creative!

**Do not use vibratory or roller compaction on the surface of Gauge Select, Mid-Century and Montrose Slabs. It is not necessary and may point-load the slab, causing permanent damage.**

## GENERAL INFORMATION

### BASIC SLAB & PAVER INSTALLATION NOTES FOR:

- Grand Flagstone
- Dimensional Flagstone
- New Mission
- Amaro®
- Superior Steppers

Refer to product pages for specific information and details pertaining to individual products.

Thank you for your interest in installing our paving products. You will find that these products truly combine the look of natural stone with the efficiency and consistency of concrete pavers.

### SAFETY

Make safety your top priority when installing our paving products. Before starting your project, be sure to address the following points:

Contact your local utility marking service prior to making any excavation. Be sure to follow all governmental safety regulations.

Always wear the appropriate personal protective equipment (PPE) including gloves, steel toed boots, safety glasses, hearing protection, respiratory protection, and any other needed safety gear.

Flagstone slabs are heavy. Utilize mechanical installation when possible. Follow proper lifting techniques to avoid back injury. Also, use two people to set larger pieces.

### PROJECT PLANNING

The first step in installing our paving products is to plan your project. Paver layout and placement is important to insure a functional and good looking installation. Remember, Flagstone products are suitable for pedestrian loading only (patios, walkways, etc.) and will not support the load of a vehicle. New Mission and Amaro® Pavers are suitable for vehicular loading.

### EXCAVATION AND BASE PREPARATION

Once you are ready to start construction, you will need to lay out the project area. Mark out the area of the installation with marking paint. Mark a second line 12" (305 mm) outside of the first line that indicates the area to be excavated. This over-excavation will allow for proper base installation.

Excavate to the required depth and grade for the installation of the specific paving product you are installing (see cross sections for minimum recommended excavation depths). Once the excavation depth has been established, compact the sub-grade well using a vibratory plate compactor. At this point, HIGH

FORMAT® recommends laying a woven geotextile down before applying any granular base materials.

**FOR THE MOST NATURAL  
APPEARANCE, MIX AND  
INSTALL PRODUCTS  
FROM MULTIPLE PALLETS  
SIMULTANEOUSLY. THIS WILL  
CREATE A MORE BLENDED,  
NATURAL LOOK.**

### PLACE THE COMPACTED GRAVEL BASE

For standard paver and flagstone installations, begin by spreading half of granular base material in the excavation. (Note: Lifts should not exceed 6" (150 mm) in thickness.) Compact this first lift to 98% standard proctor using a vibratory plate compactor and adding water as needed. Add the second lift of granular material and compact in the same manner as the first.

**KEY POINT: When installing granular base materials, be sure to consider proper grades to prevent water from standing on the surface and make sure water is directed away from building structures.**

### PAVER INSTALLATION

Bedding material requirements and paver installation vary by product type. Please see the following product specific installation instructions and tips for more details on paver installation.

## GENERAL INFORMATION

### ADDITIONAL INSTALLATION NOTES FOR:

- New Mission
- Amaro®

Refer to product pages for specific information and details pertaining to individual products.

### INSTALLATION NOTES

The following guidelines are based on minimum recommendations from the ICPI (Interlocking Concrete Pavement Institute). For an in-depth overview of the design and installation of interlocking concrete pavements and permeable pavements, please visit their website at [icpi.org](http://icpi.org). Paver cross-sections and details shown are based on pedestrian or residential drive loadings with normal site conditions. Foundation, gravel base, and drainage details will need to be addressed if poor soil conditions or commercial or industrial vehicular loadings will be present.

### EDGE RESTRAINT

Before installing pavers or bedding material, ensure proper paver edge restraint has been installed. Edge restraint should consist of a precast or cast-in-place concrete curb. For pedestrian loads or residential drives, plastic or metal edging strips fastened to the compacted base below with metal spikes are an acceptable alternative.

### BEDDING MATERIAL

For standard paver installation, apply bedding sand at a maximum thickness of 1" (25mm) on top of the compacted granular base. Level bedding sand evenly by using a screed board along the top of the screed rails.

### PAVER INSTALLATION

Begin by laying the individual pavers on screeded bedding material according to your detailed project plan.

- Push pavers together so the outermost edges butt tight, and cut units as needed to finish edges.
- To ensure proper color distribution, mix layers from several bundles at one time.
- Once installed, set pavers in bedding material by compacting with a plate compactor equipped with a urethane pad (to avoid damage to the paver surface). Compaction should proceed in overlapping rows such that each area is crossed at least twice by the compactor in two perpendicular directions. Note that pavements should be filled and compacted to within six feet of the laying surface at the end of each work day.
- KEY POINT: Pavers will settle slightly (1/4" - 3/8") during compaction. Final grade of base and bedding material should be adjusted to account for this settlement. Take special care where pavers abut existing site features such as other pavements.

**CAUTION:** A urethane pad must be used with the plate compactor to avoid damage to pavers.

### JOINT SAND

Fill all joints with jointing sand for standard paver installations or appropriate aggregate for permeable installations. Sweep joint filler material into the joints between pavers until the joints are completely filled. After the joints are filled, carefully sweep pavers clean before compacting. Loose joint material could damage the surface of the pavers during compaction. Top off joints if joint material settles during compaction and re-compact if necessary.

### OTHER CONSIDERATIONS

When snowplowing New Mission and Amaro® Pavers, a poly cutting edge must be used to avoid marking the surface of the pavers.

Do not use de-icing salts on New Mission and Amaro® Pavers. Use of de-icing salts can damage the surface and will void the product warranty.



# GAUGE SELECT


## FEATURES

- Massive dimensions and lightweight for rapid installation
- Made with TEKTRAMAT® for unsurpassed durability and a salt-proof surface, with four times the compressive strength and twice the flexural strength of normal concrete
- Authentic stone surfaces accurately replicate natural cleft flagstone. Your feet can't tell the difference!

## MATERIAL TEKTRAMAT®

## COLOR OPTIONS

BLUESTONE



SUMMIT



DUNE



CHARCOAL




Refer to our website for the most recent color offerings.

## PALLET




Dimensions: 66"L x 48"W x 18"H  
Weight: 1,500 lbs (inc. pallet)  
Coverage: 105 sq ft



### UNIT: 1

Dimensions: 60"L x 42"W x 1"H  
Weight: 155 lbs  
Coverage: 12.25 sq ft  
Units Per Pallet: 6




### UNIT: 2

Dimensions: 36"L x 23"W x 1"H  
Weight: 64 lbs  
Coverage: 5.25 sq ft  
Units Per Pallet: 6

## CONNECTING LABELED LUGS ALONG EDGES


### STEP 1

Pair Unit 1 with Unit 2 along the longest edge.




### STEP 2

Rotate additional stones. Align appropriate "+" and "-" sides.

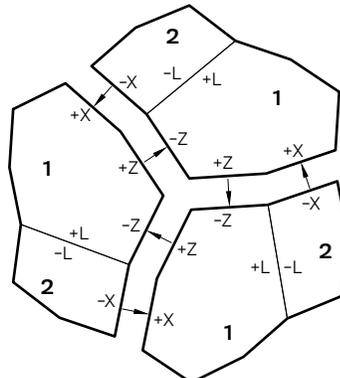


### STEP 3

Continue to lay stones until the patio is complete.

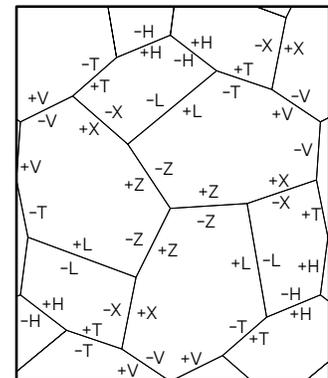

# GAUGE SELECT

## PATTERNS - PATIO

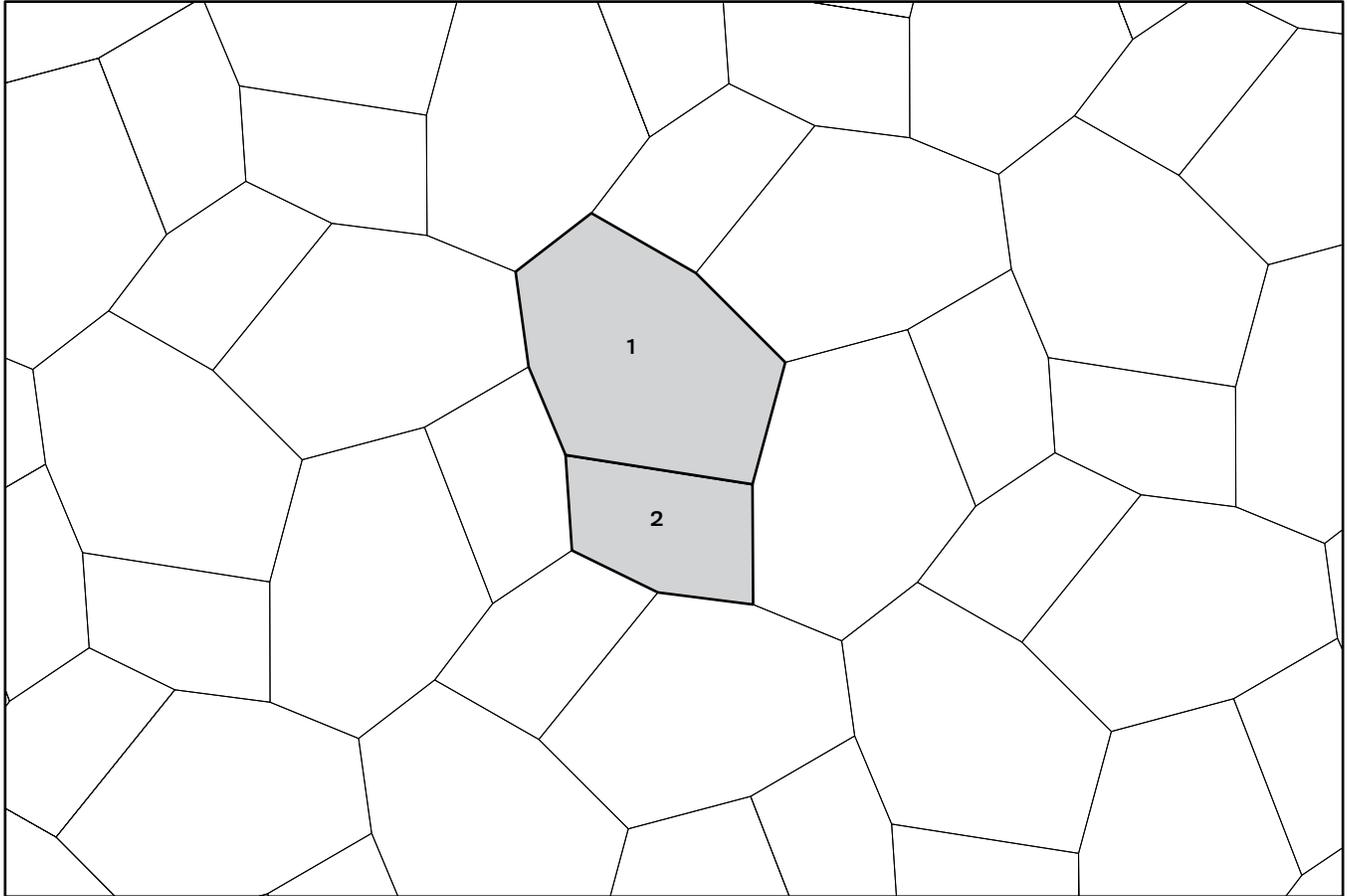


### WALKWAY

It is possible to create walkways from Gauge Select with no waste.

#### STEP 1

Layout six pieces of Gauge Select (3 large and 3 small) as shown.



#### STEP 2

Trim an irregular line from point to point as shown. Be sure to score the entire line before plunge cutting to ensure a desired cut-line.



#### FOR A 4-FT WIDE PATHWAY STEP 3

Layout the trimmed sections of Gauge Select as shown. This layout is repeatable to achieve any desired length.



#### FOR AN 8-FT WIDE PATHWAY STEP 3

Layout an additional six untrimmed pieces of Gauge Select in the same orientation as the pieces that were trimmed.

#### STEP 4

Layout the trimmed sections of Gauge Select as shown. This layout is repeatable to achieve any desired length.


## GENERAL NOTES FOR DETAILS

This page shows typical details for Gauge Select Slabs.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.


Not suitable for vehicular traffic.

## TYPICAL RESIDENTIAL INSTALLATION

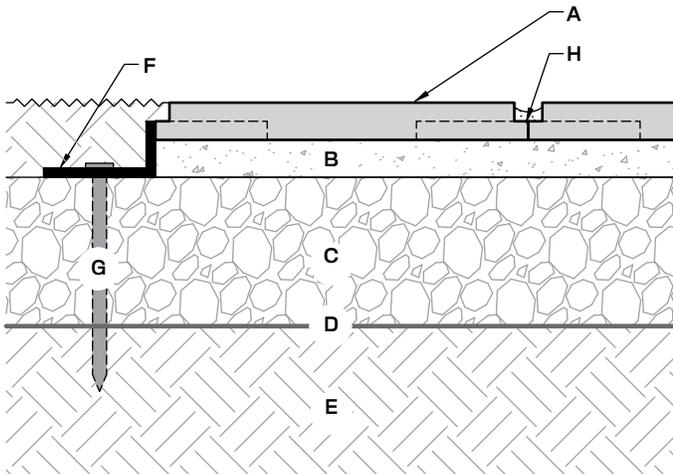

- A. Gauge Select Slab, 1" (25mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)

## TYPICAL WET-SET INSTALLATION

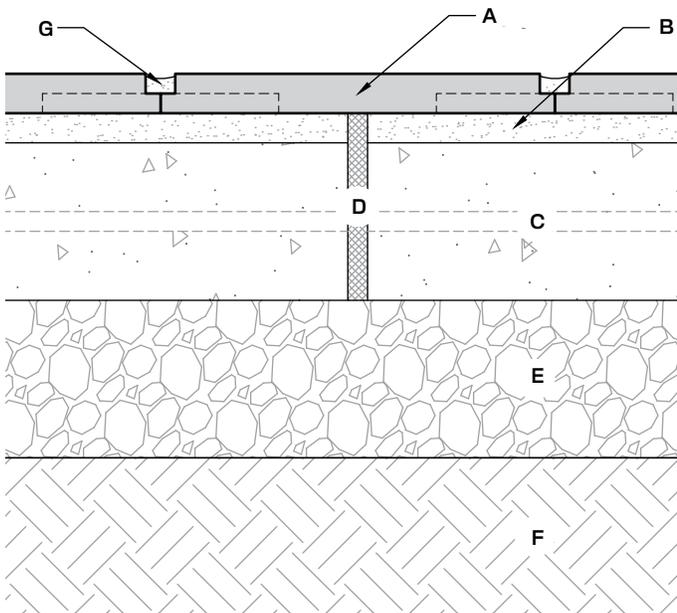

- A. Gauge Select Slab, 1" (25mm) thick
- B. Latex mortar, min. 3/4" (20mm)
- C. Reinforced concrete slab, min. 4" (100mm)
- D. Expansion joint, 1/2" (13mm)
- E. Dense graded base, min. 4" (100mm) compacted
- F. Compacted subgrade soil
- G. Latex mortar joint



# MID-CENTURY

## FEATURES

- Massive dimensions and lightweight for rapid installation
- Made with TEKTRAMAT® for unsurpassed durability and a salt-proof surface, with four times the compressive strength and twice the flexural strength of normal concrete
- Stylish modern aesthetic, featuring clean lines and thermalled stone textures


## MATERIAL TEKTRAMAT®

## COLOR OPTIONS




Refer to our website for the most recent color offerings.

## PALLET




Dimensions: 66"L x 48"W x 18"H  
 Weight: 1,500 lbs (inc. pallet)  
 Coverage: 108 sq ft




### UNIT: 4 X 3

Dimensions: 48"L x 36"W x 1"H  
 Weight: 160 lbs  
 Coverage: 12 sq ft  
 Units Per Pallet: 4



### UNIT: 3 X 3

Dimensions: 36"L x 36"W x 1"H  
 Weight: 120 lbs  
 Coverage: 9 sq ft  
 Units Per Pallet: 4




### UNIT: 3 X 2

Dimensions: 36"L x 24"W x 1"H  
 Weight: 80 lbs  
 Coverage: 6 sq ft  
 Units Per Pallet: 4

# MID-CENTURY

## PATTERN

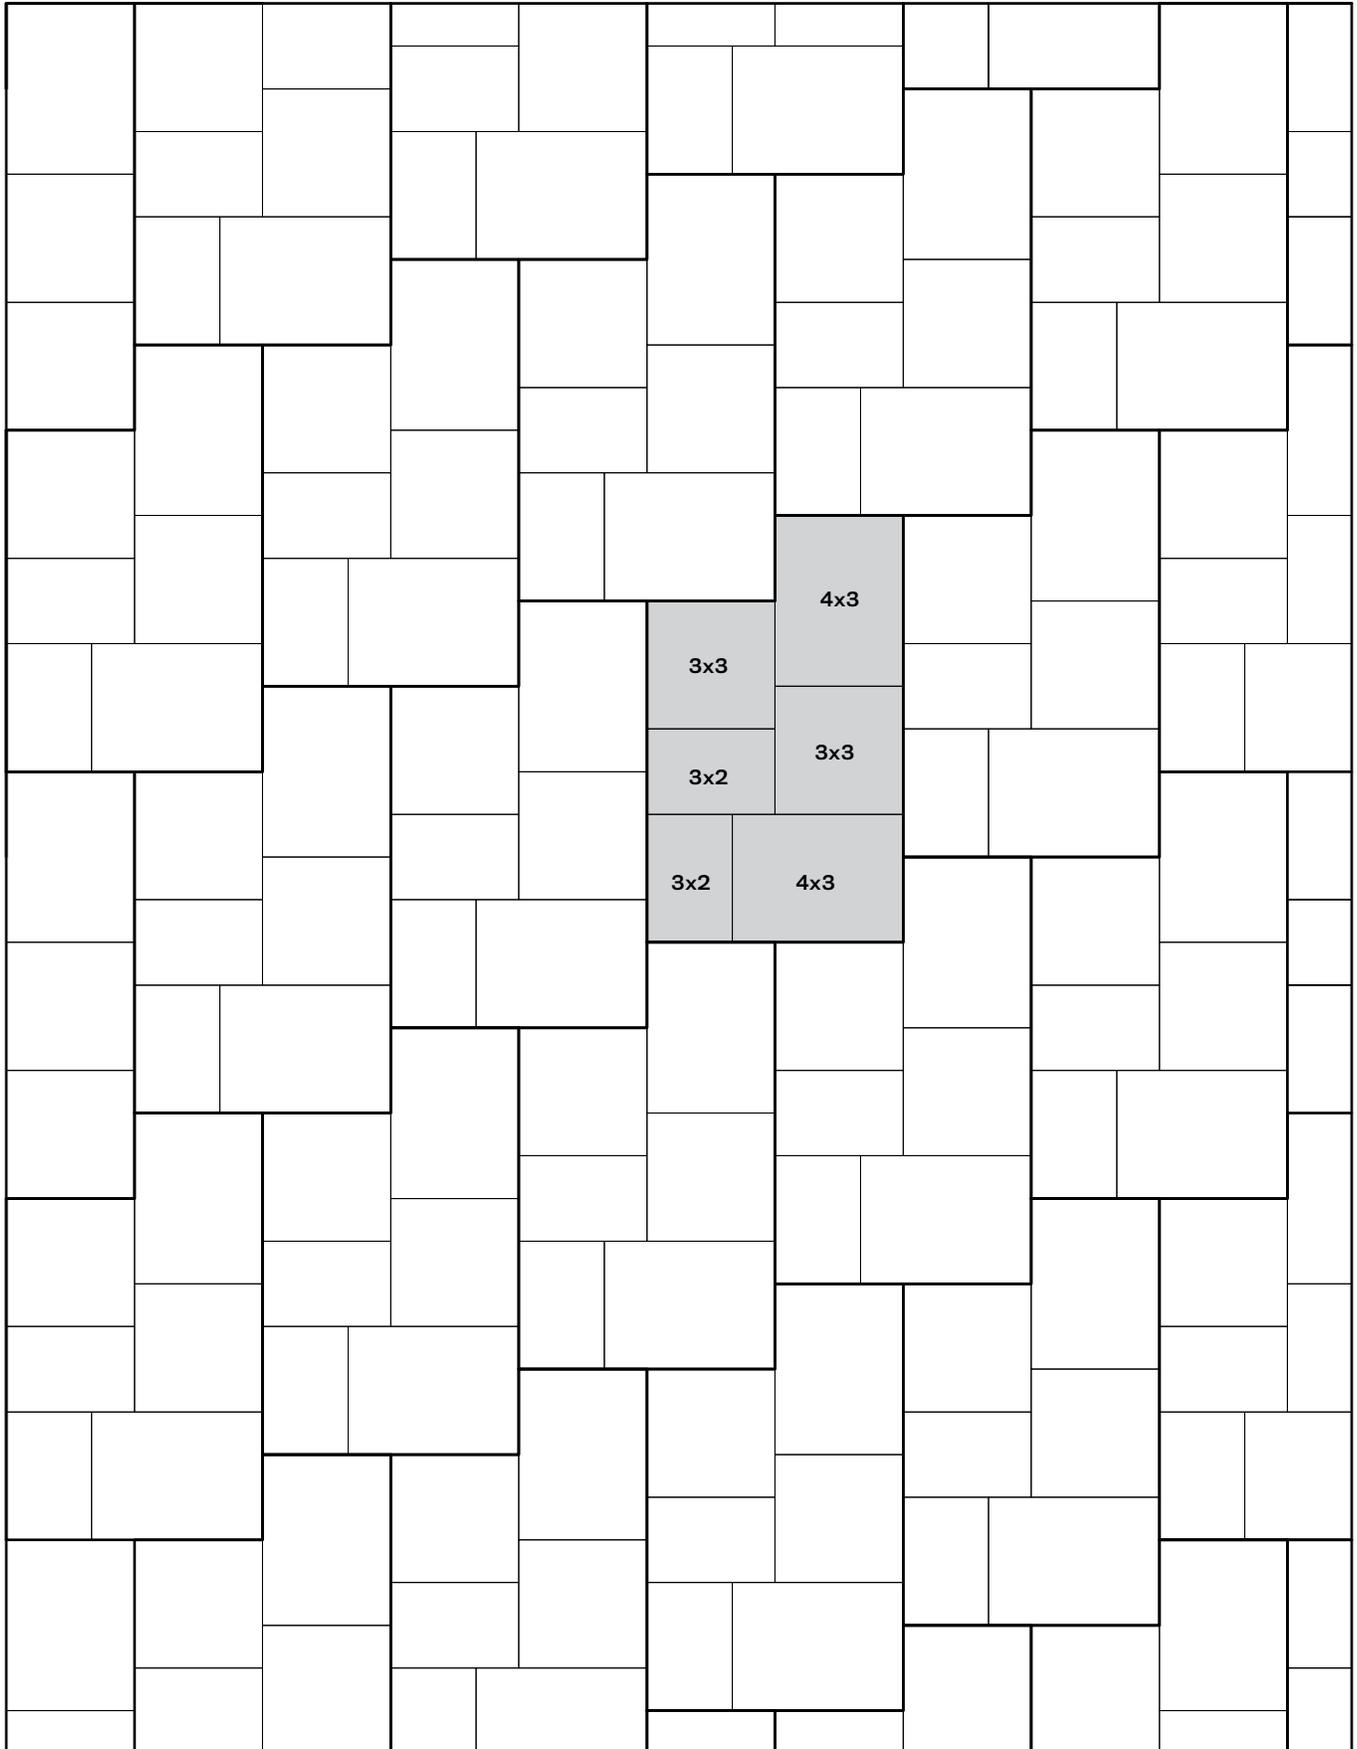


**GENERAL NOTES FOR DETAILS**

This page shows typical details for Mid-Century Slabs.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.


Not suitable for vehicular traffic.

**TYPICAL RESIDENTIAL INSTALLATION**

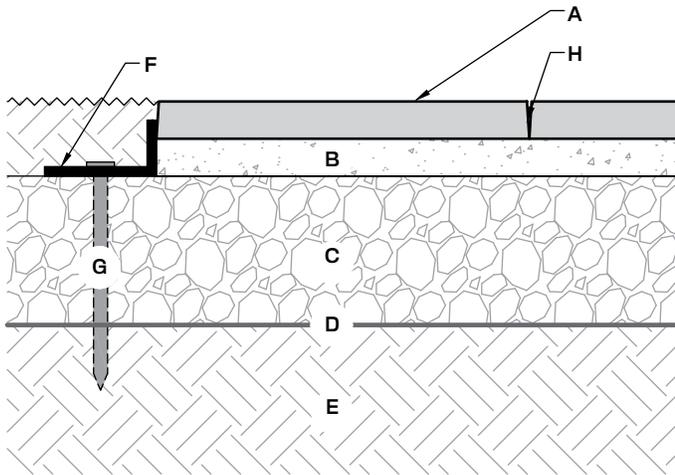

- A. Mid-Century Slab, 1" (25mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)

**TYPICAL WET-SET INSTALLATION**

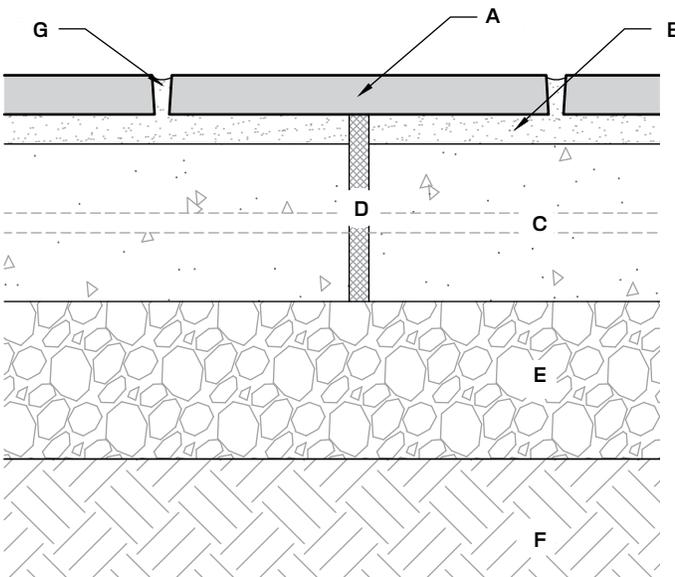

- A. Mid-Century Slab, 1" (25mm) thick
- B. Latex mortar, min. 3/4" (20mm)
- C. Reinforced concrete slab, min. 4" (100mm)
- D. Expansion joint, 1/2" (13mm)
- E. Dense graded base, min. 4" (100mm) compacted
- F. Compacted subgrade soil
- G. Latex mortar joint, 1/2" (13mm) recommended




# MONTROSE

## FEATURES


- Massive dimensions and lightweight for rapid installation
- Made with TEKTRAMAT® for unsurpassed durability and a salt-proof surface, with four times the compressive strength and twice the flexural strength of normal concrete
- Stylish modern aesthetic, featuring clean lines and thermalled stone textures

## PALLET



Dimensions: 66"L x 48"W x 18"H  
 Weight: 1,300 lbs (inc. pallet)  
 Coverage: 98 sq ft  
 Layers Per Pallet: 8

## MATERIAL TEKTRAMAT®



## UNIT

Dimensions: 42"L x 42"W x 1"H  
 Weight: 150 lbs  
 Coverage: 12.25 sq ft  
 Units Per Pallet: 8


## COLOR OPTIONS




Refer to our website for the most recent color offerings.

## PATTERNS


### STACK BOND




### STACK BOND (4" JOINT)

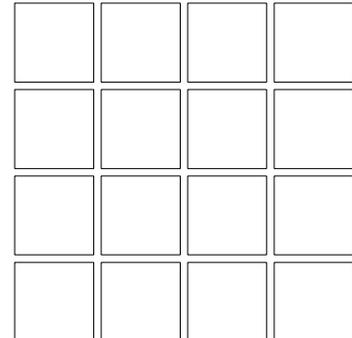

### RUNNING BOND



### RUNNING BOND (4" JOINT)

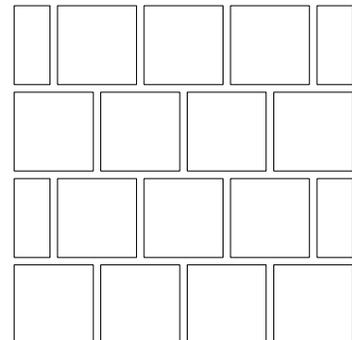


**GENERAL NOTES FOR TYPICAL DETAILS**

This page shows typical details for Montrose Slabs.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.


Not suitable for vehicular traffic.

**TYPICAL RESIDENTIAL INSTALLATION**

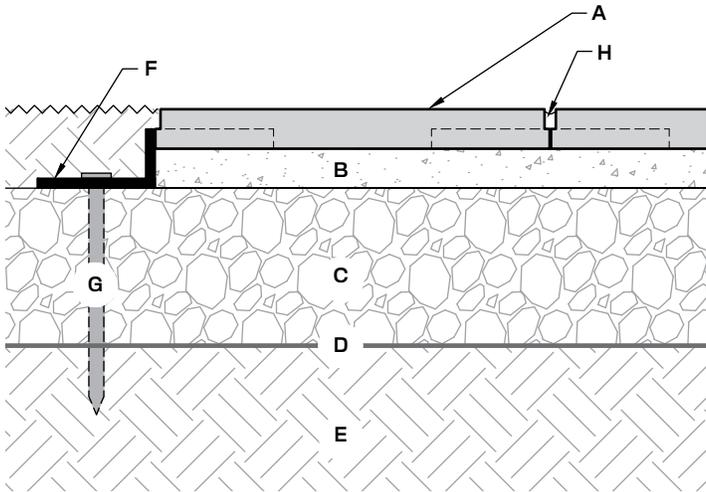

- A. Montrose Slab, 1" (25mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)

**TYPICAL WET-SET INSTALLATION**

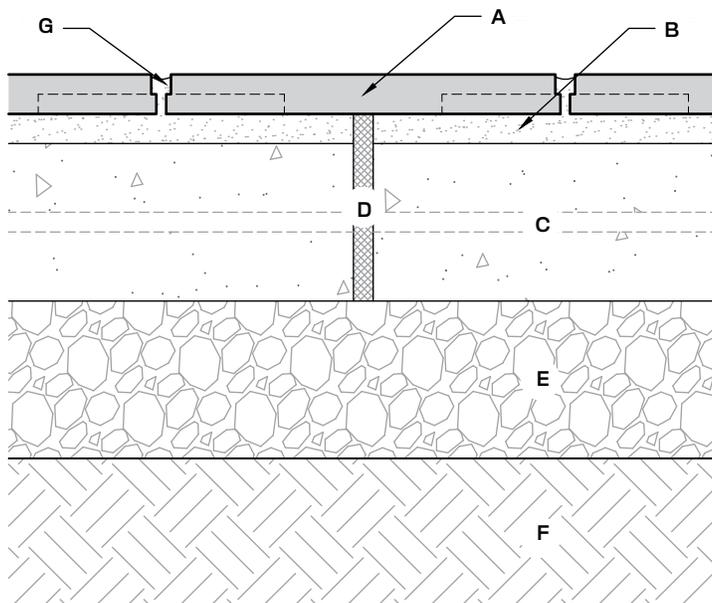

- A. Montrose Slab, 1" (25mm) thick
- B. Latex mortar, min. 3/4" (20mm)
- C. Reinforced concrete slab, min. 4" (100mm)
- D. Expansion joint, 1/2" (13mm)
- E. Dense graded base, min. 4" (100mm) compacted
- F. Compacted subgrade soil
- G. Latex mortar joint, 1/2" (13mm) recommended




# GRAND FLAGSTONE

## FEATURES

- 15 unique shapes replicate large, irregular flagstone with natural stone texture
- Fast installations with easy-to-install pattern
- Uniform thickness to create comfortable end result
- High strength concrete means long term durability
- Multiple natural color blends available

## PALLET



Dimensions: 42"L x 42"W x 24"H  
 Weight: 2,000± lbs (inc. pallet)  
 Coverage: 90 sq ft (assumes 3/8" joint)  
 Layers Per Pallet: 8 (random assortment of layers)

## MATERIAL

WETCAST  
 VIBRALOCK®

## COLOR OPTIONS

FOND DU LAC




SLATE GRAY



AUBURN RIDGE  
 (Special Order)




Refer to our website for the most recent color offerings.




### LAYER: 1

Dimensions: 42"L x 38"W x 1.75"H  
 Weight: 245 lbs




### LAYER: 2

Dimensions: 42"L x 38"W x 1.75"H  
 Weight: 245 lbs



### LAYER: 3

Dimensions: 42"L x 38"W x 1.75"H  
 Weight: 245 lbs




### LAYER: 4

Dimensions: 42"L x 38"W x 1.75"H  
 Weight: 245 lbs


# GRAND FLAGSTONE

## INTERLOCKING LAYERS

COMMON POINTS

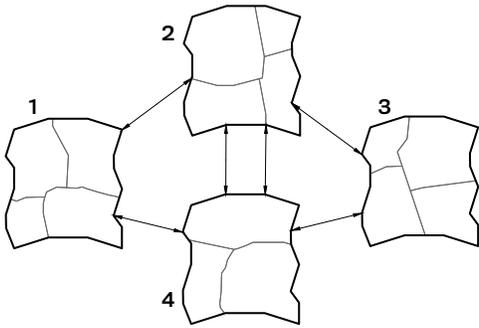


PROPER PLACEMENT




Note: Outside dimensions of each layer are identical to all other layers, allowing any layer to be substituted anywhere in the pattern.

± 3/8" joints (typical)

## PATTERNS - PATIO

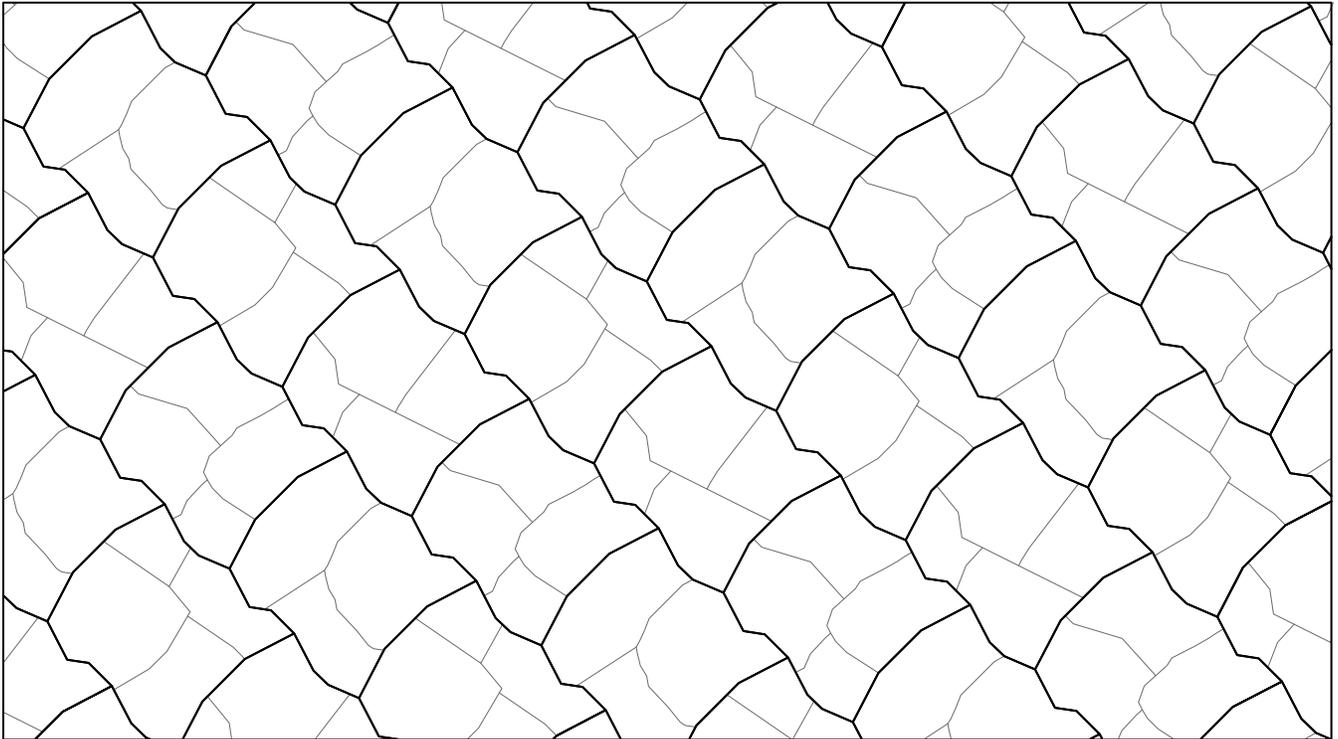


## WALKWAY

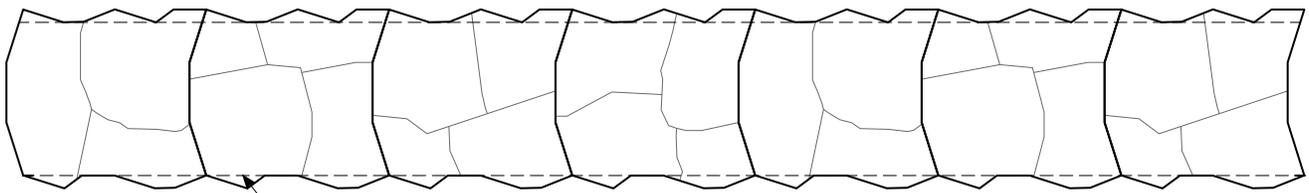

Leave jagged edge or trim to provide smooth edge (optional)

## LAYOUT ORIENTATION


### INCORRECT

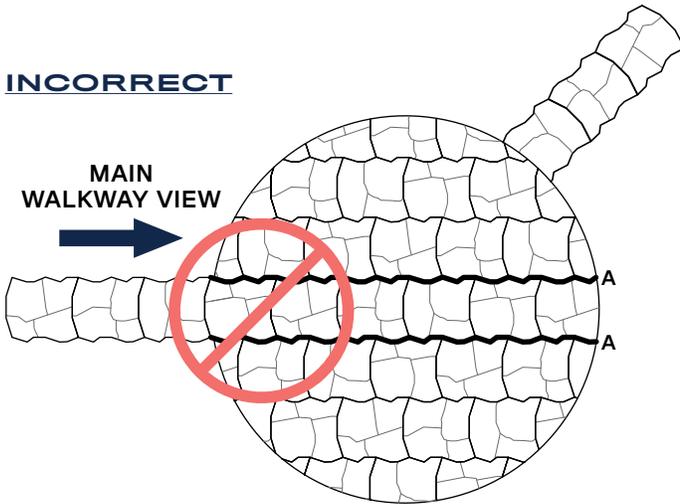

Layout orientation is important with Grand Flagstone. Due to the nature of the interlocking sets of slabs, there are long, unbroken joints between rows. Often, the irregular nature of the Grand Flagstone limits how noticeable these unbroken joints are in the finished project. However, the lines become slightly more noticeable when you are looking parallel to the unbroken joints than when you are looking at them on an angle. To limit this effect, Grand Flagstone layers should be laid at a 45 degree angle from the most common viewing angle. This viewing angle would most likely be a patio entrance or step location.

A. Long, unbroken lines caused by seam between layers


### CORRECT

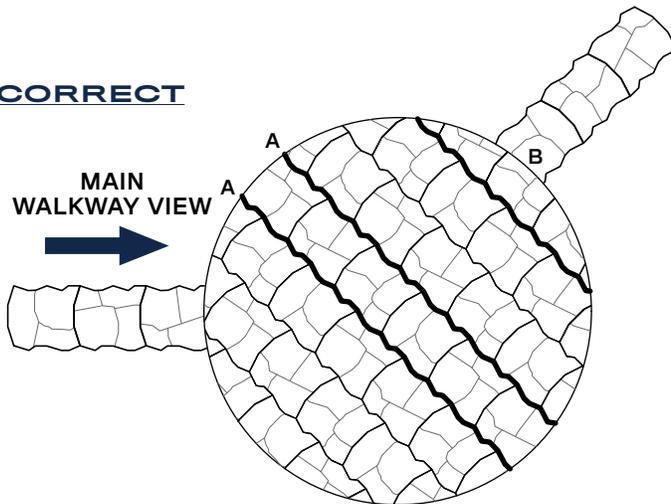

A. Long, unbroken lines caused by seam between layers oriented at 45° angle from main view

B. Long, unbroken lines caused by seam between layers oriented as close to 45° angle from secondary view as possible.

## PROCEDURE FOR INSTALLING CRACKED PIECES

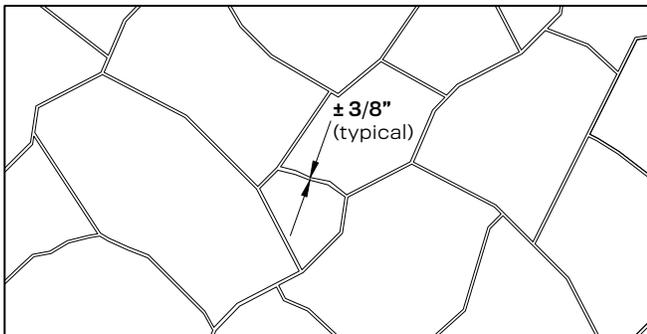

- Trim Broken Edges if needed
- Install Pieces with Typical 3/8" (10 mm) Joint

Individual pieces of Grand Flagstone can crack either during delivery to the job or during on-site handling prior to placement. Typically less than 5% of the pieces will crack. There are two methods to deal with cracked pieces.

The first method is to use the cracked pieces to fill in around the perimeter of the project where there is always a need for small pieces.

The second method is to use the cracked pieces to enhance the layout pattern. Since Grand Flagstone is designed to create an irregular flagstone walking surface, an extra crack simply provides another joint line in the Grand Flagstone pattern. Place the cracked pieces next to each other with a 3/8" (10 mm) joint between them. The joint is filled with polymeric jointing sand just like all the other joints. If necessary, the cracked pieces may need to be trimmed to create a smoother edge or provide a larger joint to match all the other joints in your project.

## INSTALLATION GUIDE

### BEDDING SAND INSTALLATION

Using screed rails on the compacted granular base, apply bedding sand at a maximum thickness of 1" (25mm). By using a screed board along the top of the screed rails, the bedding sand will level evenly. Bedding sand should be compacted since Grand Flagstone slabs should not be compacted after installation.

### FLAGSTONE INSTALLATION

- Begin by laying the individual pieces of Grand Flagstone on the screeded bedding material according to your detailed project plan.
- Separate individual pieces approximately 3/8" (10 mm) from each other. When units are set with a 3/8" gap, a full pallet will produce 90 square feet (8.36 m<sup>2</sup>) of coverage.
- Cut units as needed to finish edges.
- NOTE: To ensure proper color distribution, mix layers from several bundles at one time.

**Plate compaction of Grand Flagstone slabs after installation is not necessary, and is also not recommended. Use of plate compaction on Grand Flagstone will void the warranty.**

### INTERLOCKING LAYERS

Grand Flagstone has been designed so each layer of slabs on a pallet is an interlocking set. Each interlocking set, or layer, of slabs has been designed to interlock with all other layers.

### OTHER CONSIDERATIONS

**Not suitable for vehicular traffic.**

### JOINT SAND INSTALLATION


Once the flagstone pieces are installed, fill all joints with jointing sand suitable for large joints. Sweep the sand into the joints between flagstones until the joints are completely filled. Follow the jointing sand manufacturer's recommendations for wetting the sand. You may need to repeat this process with more dry sand in a few days to completely fill the joints between individual slabs.

## GENERAL NOTES FOR DETAIL

This page shows a typical detail for Grand Flagstone.

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

### TYPICAL RESIDENTIAL INSTALLATION

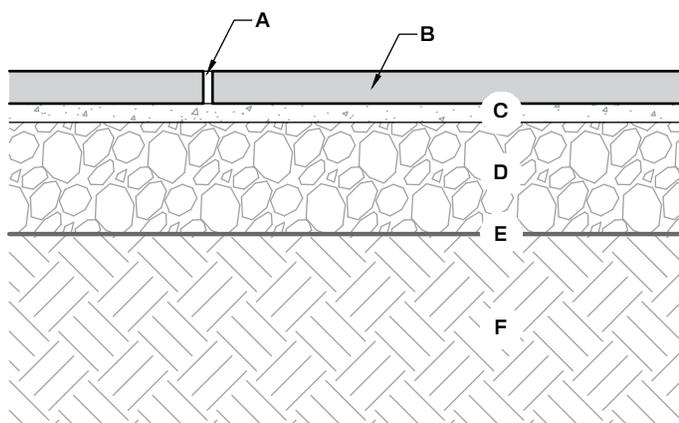

- A. Polymeric jointing sand between slabs ( $\pm 3/8"$  (9.5 mm) wide)
- B. Grand Flagstone Slabs (1.75" (45 mm) thick)
- C. Coarse bedding sand (1" (25 mm) thick)
- D. Compacted gravel base (6" (150 mm) thick)
- E. Woven geotextile (optional)
- F. Suitable, compacted subgrade




# DIMENSIONAL FLAGSTONE

## FEATURES

- Six unique shapes with 24 unique stone textures
- Uniform thickness and accurate dimensions translates into fast installation and a beautiful end result

## PALLET




Weight: 2,350± lbs (inc. pallet)  
 Coverage: 98 sq ft  
 Layers Per Pallet: 8  
 Section: 12.25 sq ft per layer

**MATERIAL**  
**WETCAST**  
**VIBRALOCK®**


## COLOR OPTIONS




Refer to our website for the most recent color offerings.




**UNIT: 24 X 24**  
 Dimensions: 24"L x 24"W x 2"H  
 Weight: 96 lbs  
 Coverage: 4 sq ft  
 Units Per Pallet: 8



**UNIT: 24 X 18**  
 Dimensions: 24"L x 18"W x 2"H  
 Weight: 72 lbs  
 Coverage: 3 sq ft  
 Units Per Pallet: 8



**UNIT: 18 X 18**  
 Dimensions: 18"L x 18"W x 2"H  
 Weight: 54 lbs  
 Coverage: 2.25 sq ft  
 Units Per Pallet: 8



**UNIT: 18 X 12**  
 Dimensions: 18"L x 12"W x 2"H  
 Weight: 36 lbs  
 Coverage: 1.5 sq ft  
 Units Per Pallet: 8




**UNIT: 12 X 12**  
 Dimensions: 12"L x 12"W x 2"H  
 Weight: 24 lbs  
 Coverage: 1 sq ft  
 Units Per Pallet: 8




**UNIT: 12 X 6**  
 Dimensions: 12"L x 6"W x 2"H  
 Weight: 12 lbs  
 Coverage: .5 sq ft  
 Units Per Pallet: 8

# DIMENSIONAL FLAGSTONE

## PATTERNS - PATIO

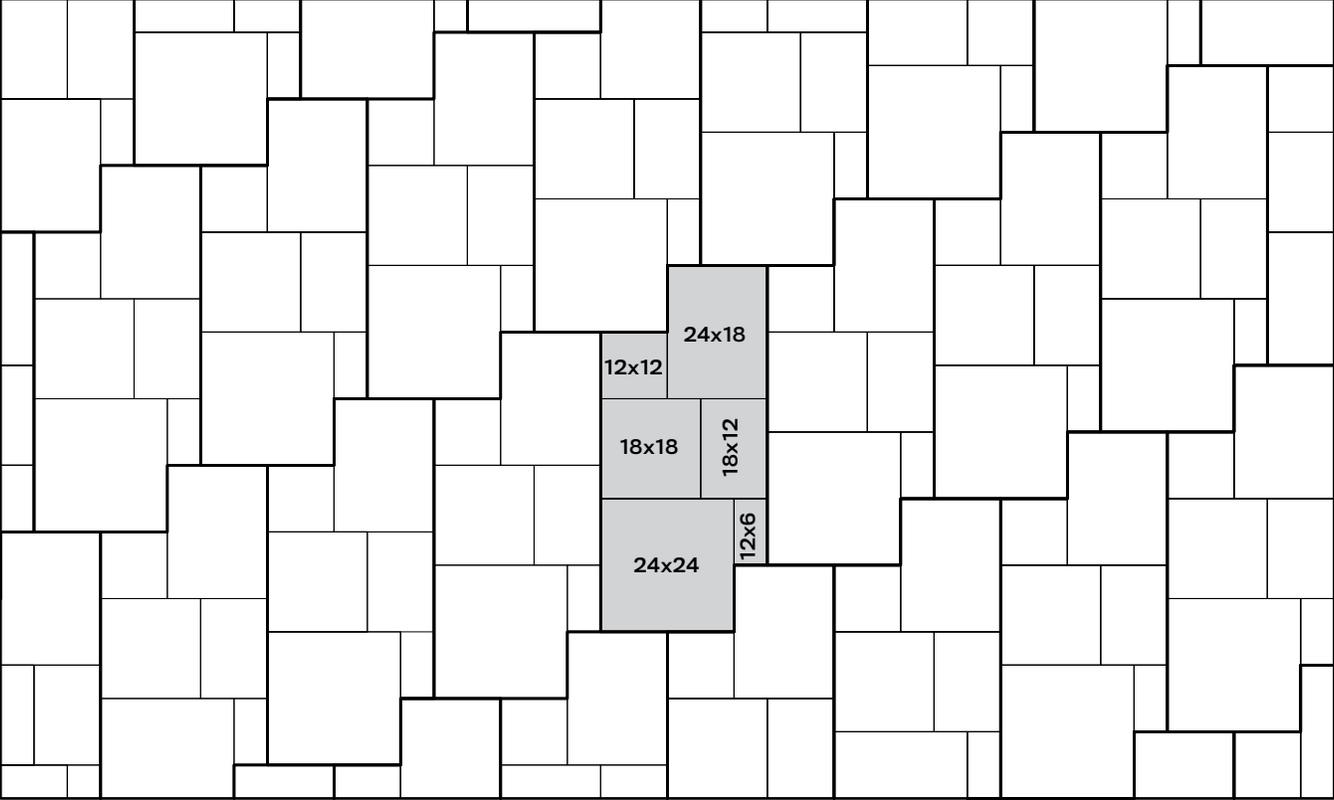

## WALKWAY

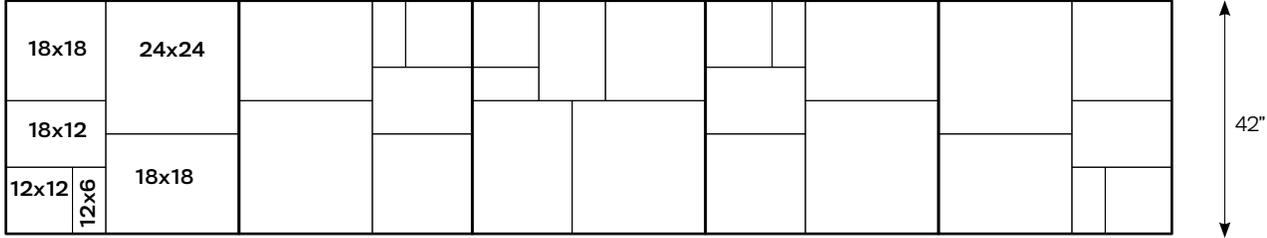

SLABS & PAVERS

## INSTALLATION GUIDE

### BEDDING SAND INSTALLATION

Using screed rails on the compacted granular base, apply bedding sand at a maximum thickness of 1" (25mm). By using a screed board along the top of the screed rails, the bedding sand will level evenly.

### FLAGSTONE INSTALLATION

- Begin by laying the individual pieces of Dimensional Flagstone on the screeded bedding material according to your detailed project plan.
- Push flagstone slabs directly together so the bottom edges butt tight. There is no need to space the slabs to create the necessary joint. Joint is pre-set in the unit.
- Cut units as needed to finish edges of installation.
- NOTE: To ensure proper color distribution, mix layers from several bundles at one time.

**Plate compaction on the surface of Dimensional Flagstone slabs is not necessary, and is also not recommended. Use of plate compaction on the surface of Dimensional Flagstone will void the warranty.**

### JOINT SAND INSTALLATION

Once the flagstone pieces are installed, fill all joints with jointing sand suitable for large joints. Sweep the sand into the joints between flagstones until the joints are completely filled. Follow the jointing sand manufacturer's recommendations for wetting the sand. You may need to repeat this process with more dry sand in a few days to completely fill the joints between individual slabs.

### OTHER CONSIDERATIONS


**Not suitable for vehicular traffic.**

## GENERAL NOTES FOR DETAILS

This page shows a typical detail for Dimensional Flagstone.

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern and product.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

### TYPICAL RESIDENTIAL INSTALLATION

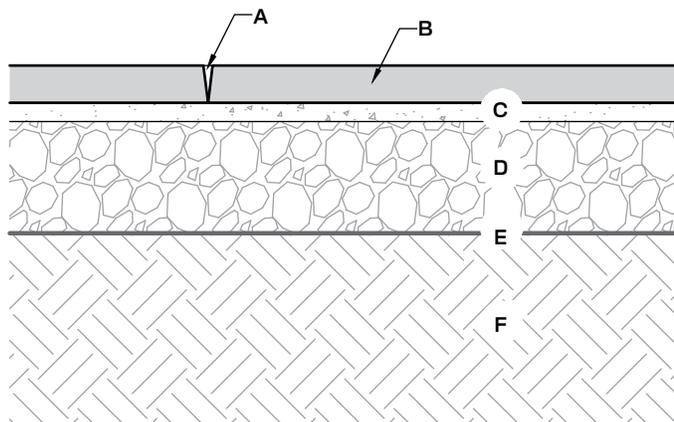

- A. Polymeric jointing sand between slabs
- B. Dimensional Flagstone Slabs (2" (51 mm) thick)
- C. Coarse bedding sand (1" (25 mm) thick)
- D. Compacted gravel base (6" (150 mm) thick)
- E. Woven geotextile (optional)
- F. Suitable, compacted subgrade




# NEW MISSION

## FEATURES

- Interlocking pavement on a generous scale, with showstopping texture and an elegant “random” pattern. Perfect for residential traffic.
- Tighter joints for non-permeable applications
- Three sizes and multiple face textures
- Suitable for residential vehicular traffic

## PALLET



Weight: 3,050± lbs (inc. pallet)  
 Coverage: 100 sq ft  
 Linear Feet (Soldier Course): 140 ft  
 Layers Per Pallet: 8  
 Section: 12.5 sq ft per layer

**MATERIAL**  
**WETCAST**  
**VIBRALOCK®**



### UNIT: 6 X 9

Dimensions: 5 11/16" L x 8 1/2" W x 2 3/4" H  
 Weight: 10 lbs  
 Coverage: .33 sq ft  
 Units Per Pallet: 80



### UNIT: 9 X 9

Dimensions: 8 1/2" L x 8 1/2" W x 2 3/4" H  
 Weight: 15 lbs  
 Coverage: .5 sq ft  
 Units Per Pallet: 40

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY



BLUESTONE



AUBURN RIDGE  
 (Special Order)




### UNIT: 9 X 12

Dimensions: 11 5/16" L x 8 1/2" W x 2 3/4" H  
 Weight: 20 lbs  
 Coverage: .66 sq ft  
 Units Per Pallet: 80


Refer to our website for the most recent color offerings.

PATTERNS - PATIO

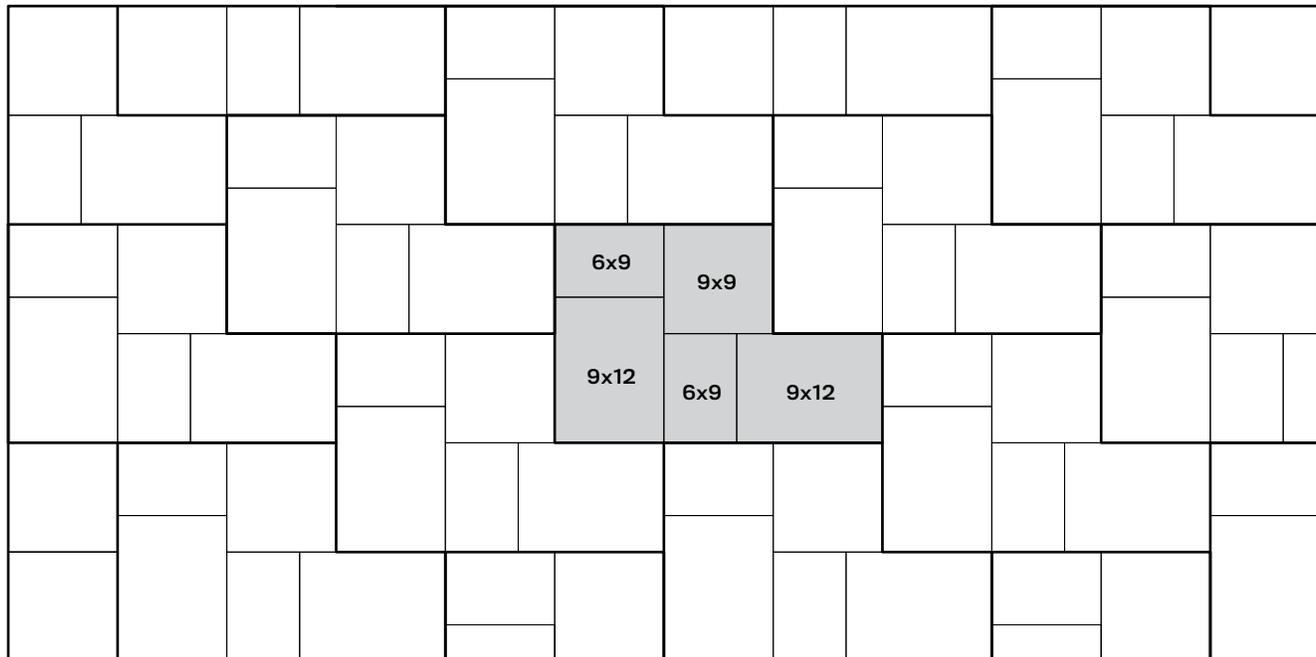

BORDER COURSE

Each size paver has a 9" side. Run these sides end-over-end to create a soldier course to border your driveway, patio and walkways. For added aesthetic value, use a different color paver for the soldier course.

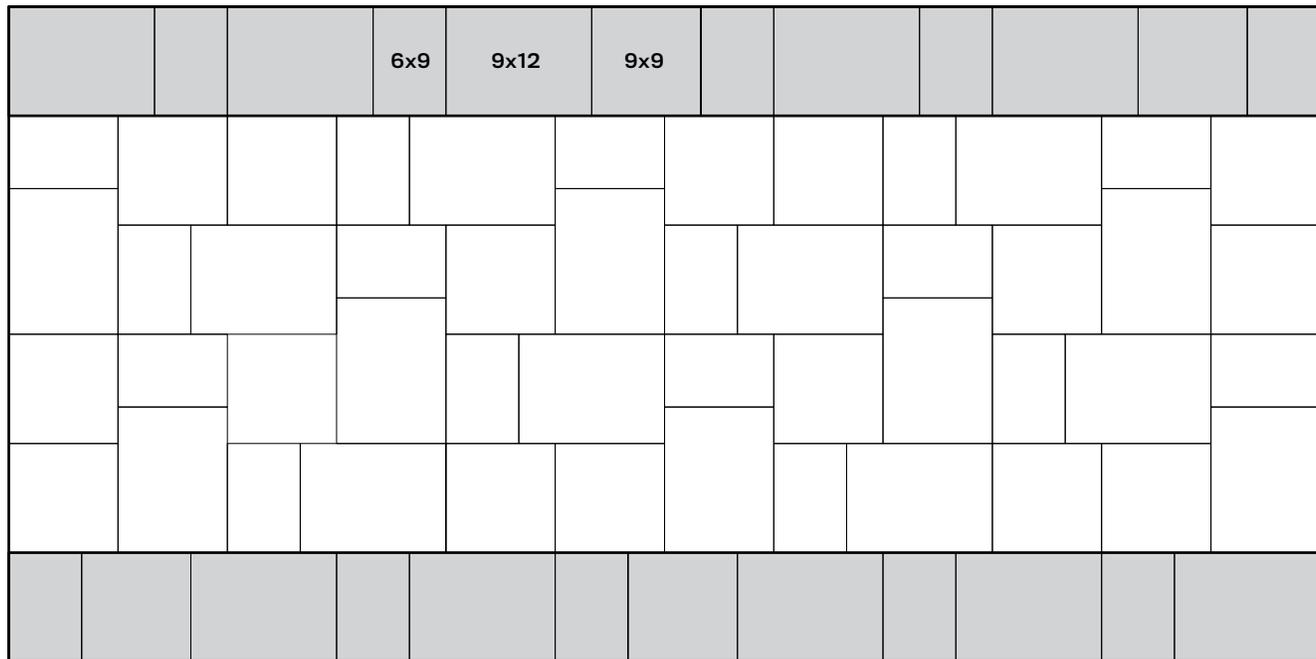


GENERAL NOTES FOR DETAILS

This page shows typical details for New Mission Pavers.

- These drawings are for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only.
- Sections shown are the minimum recommendations.
- Adequate surface drainage should be provided to prevent ponded water.
- These sections are not intended for permeable pavement applications.
- When snowplowing New Mission Pavers, a poly cutting edge must be used to avoid marking the surface of the paver.


TYPICAL PEDESTRIAN AND RESIDENTIAL VEHICULAR DETAIL

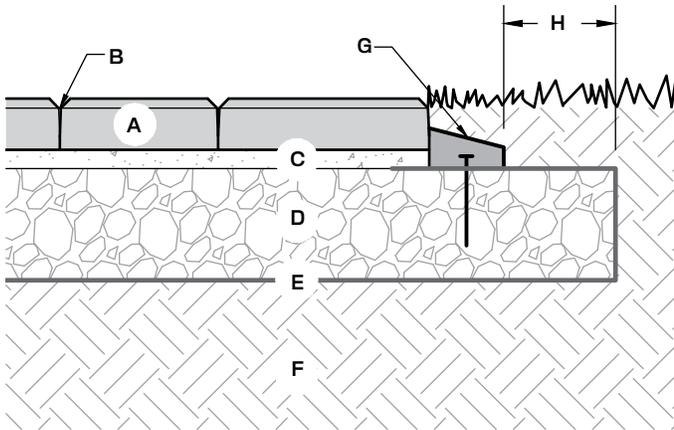

- A. New Mission Pavers (2.75" (70 mm) thick)
- B. Polymeric jointing sand between pavers
- C. Bedding sand, ASTM C33, <1% finer than 0.075 mm (1" (25 mm) thick)
- D. Compacted dense-graded gravel base (minimum 6" (152 mm) thick)
- E. Woven geotextile (as required)
- F. Compacted suitable subgrade
- G. Plastic or metal edging strip
- H. 6" (152 mm) minimum

Commercial projects with vehicular traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.

TYPICAL LIGHT COMMERCIAL VEHICULAR DETAIL

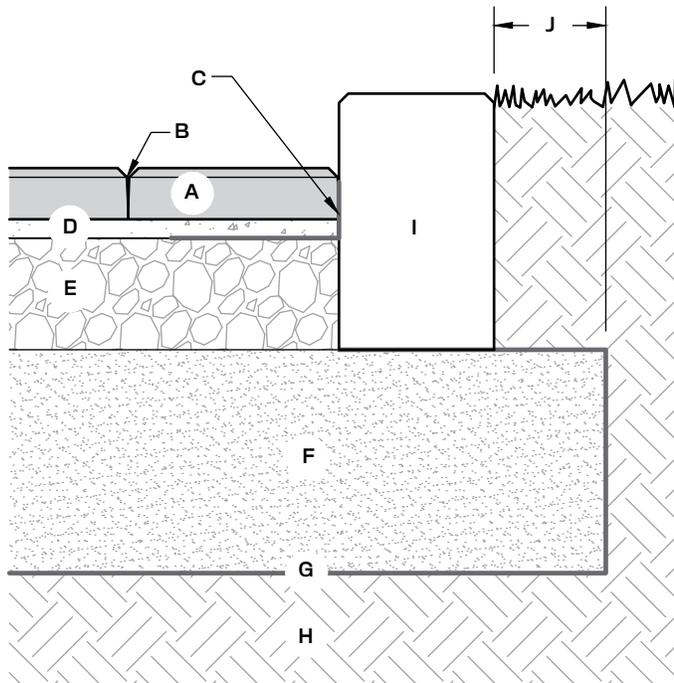

- A. New Mission Pavers (2.75" (70 mm) thick)
- B. Polymeric jointing sand between pavers
- C. 12" (305 mm) wide geotextile turned up against curb
- D. Bedding sand, ASTM C33, <1% finer than 0.075 mm (1" (25 mm) thick)
- E. Compacted dense-graded gravel base (minimum 8" (203 mm) thick)
- F. Free-draining sand subbase (minimum 12" (305 mm) thick, if required)
- G. Woven geotextile (as required)
- H. Compacted suitable subgrade
- I. Cast-in-Place concrete edging or curb
- J. 6" (152 mm) minimum

Section is suitable for vehicular applications assuming <100,000 equivalent single axle loads (ESALs), competent subgrade with California bearing ratio (CBR) >5, and low speeds (<25 mph (40 kph)).

Subgrade preparation, subbase requirements, and subsurface draining requirement should be determined by the project geotechnical engineer.


# AMARO®

## FEATURES

- Twelve textures provide a reclaimed brick aesthetic with consistent quality
- Rich, bold colors create perfect accents to make every project pop
- The paver can be placed with one hand to speed up installation
- Suitable for residential vehicular traffic

**MATERIAL**  
**WETCAST**  
**VIBRALOCK®**

## PALLET



Weight:	2,300± lbs (inc. pallet)
Coverage:	72± sq ft
Linear Feet (Soldier Course):	96 ft
Linear Feet (Sailor Course):	288 ft
Layers Per Pallet:	8
Pavers Per Layer:	48



## UNIT

Dimensions:	9"L x 3"W x 2.75"H
Weight:	6 lbs
Coverage:	.1875 sq ft
Units Per Pallet:	384

## COLOR OPTIONS

CHARCOAL




MERLOT




## PATTERNS


1/2 RUNNING BOND




1/3 RUNNING BOND



HERRINGBONE



BASKETWEAVE




Refer to our website for the most recent color offerings.

## GENERAL NOTES FOR DETAILS

This page shows typical details for Amaro® Pavers.

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only.
- Sections shown are the minimum recommendations for residential drives and pedestrian loading.
- Commercial projects with vehicular traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Adequate surface drainage should be provided to prevent ponded water.
- These sections are not intended for permeable pavement applications.
- When snowplowing Amaro® Pavers, a poly cutting edge must be used to avoid marking the surface of the paver.

## TYPICAL PEDESTRIAN AND RESIDENTIAL VEHICULAR DETAIL

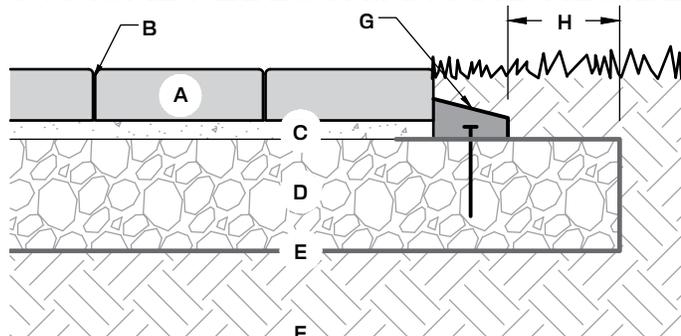

- A. Amaro® Pavers (2.75" (70 mm) thick)
- B. Polymeric jointing sand between pavers
- C. Bedding sand, ASTM C33, <1% finer than 0.075 mm (1" (25 mm) thick)
- D. Compacted dense-graded gravel base (minimum 6" (152 mm) thick)
- E. Woven geotextile (as required)
- F. Compacted suitable subgrade
- G. Plastic or metal edging strip
- H. 6" (152 mm) minimum



# SUPERIOR STEPPERS

## FEATURES

- Eight different shapes for a rustic, authentic stone appearance
- Various color offerings compliment your existing backyard environment

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)




LIMESTONE  
(Special Order)



## PALLET



Weight: 1,300 lbs (inc. pallet)  
 Coverage: 52 sq ft  
 Pieces Per Pallet: 16 (random assortment)  
 Section: 3.25 sq ft per 1 piece

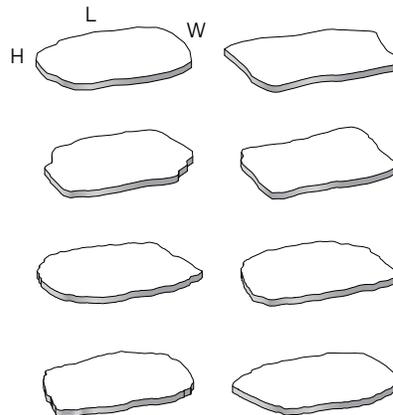

## UNITS: 1 - 8

Dimensions: 27"L x 21"W x 2"H  
 Weight: 78 lbs  
 Coverage: 3.25 sq ft


Refer to our website for the most recent color offerings.

## GENERAL NOTES FOR DETAILS

This page shows a typical detail for Superior Steppers.

- This drawing is for preliminary reference only (not for final construction).
- Block size and placement shown are for reference only, individual steps vary with installation pattern.

## TYPICAL INSTALLATION

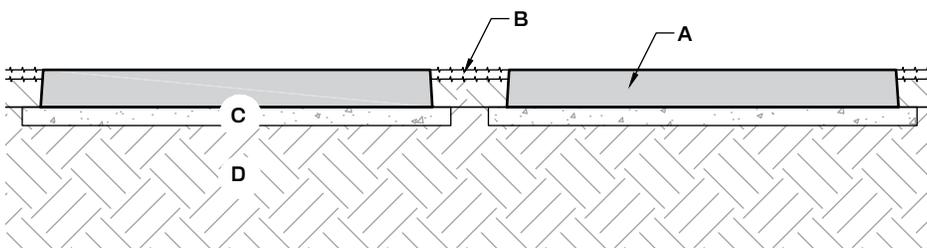

- A. Superior Stepper Stone (2" (50 mm) thick)
- B. Turf between Superior Stepper Stones
- C. Coarse bedding sand min. 1" (25 mm) thick compacted
- D. Compacted existing sub-grade

# STEPS

GENERAL INFORMATION  
IRREGULAR  
DIMENSIONAL



## INSTALLATION GUIDE

### BASIC STEP INSTALLATION NOTES FOR:

- Irregular
- Dimensional

Refer to product pages for specific information and details pertaining to individual products.

### MEASUREMENTS

Begin the step installation process by measuring the total rise required and calculating the number of steps to be used. Each step has a 7" rise, but should be sloped approximately 1/2" such that the back of the step is higher than the front of the step. This slope will facilitate surface water drainage. With appropriate sloping, the net rise of each step is 7-1/2". Divide the total rise by 7-1/2" to get the number of steps required.

### CALCULATIONS

Next, calculate the tread width. Generally, when the grade allows, a 12" or wider tread is desirable. To calculate the tread width, divide the total allowable horizontal run minus the width of the top step, by the number of steps minus one. The one less will account for the top step.

#### CONSIDER THE FOLLOWING EXAMPLE:

Total rise = 45", Total horizontal run = 94", Width of top step = 24",  
Rise of steps = 7",

Number of steps =  $45" \div 7-1/2"/\text{Step} = 6 \text{ Steps}$

Tread Depth =  $(94"-24") \div (6-1) = 14" \text{ Tread Depth}$

### EXCAVATION

Excavate and grade the area for the first step. Steps should be placed on at least 3" of free draining soil, such as sand or pea-stone. Compact soil to a minimum of 95% Standard Proctor.

### PLACEMENT

Place step with straps, a gravity lifting clamp, or a vacuum lift using a small excavator or skid-steer to lift the piece into place. Practice safe handling procedures during this process.


### FILL

Fill behind each step with free draining soil and compact to 95% standard proctor. Remember to slope fill to allow for proper drainage when next step is placed. Continue placing steps in this manner until finish grade is reached.

## TYPICAL STEP INSTALLATION DETAILS

This page shows a typical detail for steps.

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual steps vary with installation pattern.

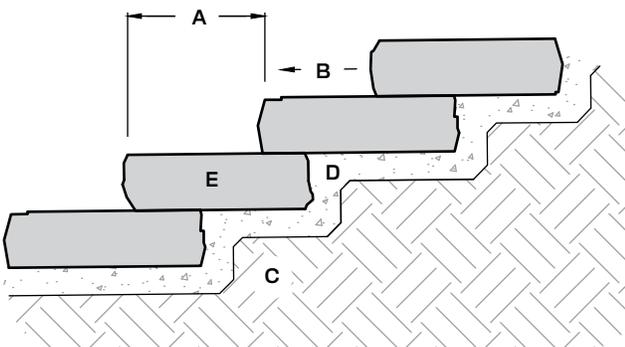

- A. Tread width varies (12" or more is desirable)
- B. Slope 1-2% (to allow drainage)
- C. Compact subbase material to a minimum of 95% max. dry density (or as specified by Engineer)
- D. Free-draining granular material (3" thick minimum compact to a min. of 95% max. dry density)
- E. Step block



# IRREGULAR

## FEATURES

- Stone-like shapes and textures create inviting walkways
- Consistent rise equals fast installation and safe end result
- Quality materials and long term durability
- Multiple natural color blends available
- Complimentary products offer a variety of creative possibilities

## MATERIAL


### WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY



SUPERIOR BUFF



AUBURN RIDGE  
(Special Order)





LIMESTONE  
(Special Order)



Refer to our website for the most recent color offerings.

## LARGE 6' PALLET

Weight: 3,900± lbs (inc. pallet)  
Pieces Per Pallet: 3 (random assortment)



## SNAPPED FACE



### UNIT: A

Dimensions: 72"L x 30"W x 7"H  
Weight: 1,300± lbs

### UNIT: B

Dimensions: 72"L x 30"W x 7"H  
Weight: 1,300± lbs

### UNIT: C

Dimensions: 72"L x 30"W x 7"H  
Weight: 1,300± lbs

Individual steps cannot be requested, the pallets come in a random assortment.

All dimensions are nominal.

# IRREGULAR


## STANDARD 7" RISE PALLET

Weight: 4,200± lbs (inc. pallet)  
Pieces Per Pallet: 8 (random assortment)

WEATHERED FACE




STEPS




### UNIT: A

Dimensions: 54"L x 24"W x 7"H  
Weight: 458± lbs




### UNIT: B

Dimensions: 60"L x 24"W x 7"H  
Weight: 600± lbs




### UNIT: C

Dimensions: 42"L x 17"W x 7"H  
Weight: 349± lbs



### UNIT: D

Dimensions: 48"L x 28"W x 7"H  
Weight: 567± lbs



### UNIT: E

Dimensions: 42"L x 26"W x 7"H  
Weight: 476± lbs



### UNIT: F

Dimensions: 48"L x 24"W x 7"H  
Weight: 512± lbs

Individual steps cannot be requested, the pallets come in a random assortment.

All dimensions are nominal.



# DIMENSIONAL

## FEATURES

- Stone-like shapes and textures create inviting walkways
- Consistent rise equals fast installation and safe end result
- Quality materials and long term durability
- Multiple natural color blends available
- Complimentary products offer a variety of creative possibilities


## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY



SUPERIOR BUFF



AUBURN RIDGE (Special Order)




LIMESTONE (Special Order)



Refer to our website for the most recent color offerings.


### 3' PALLET

Weight: 3,050± lbs (inc. pallet)  
Pieces Per Pallet: 8




**UNIT**  
Dimensions: 36"L x 18"W x 7"H  
Weight: 375± lbs

### GUILLOTINE FACE



### 4' PALLET

Weight: 4,050± lbs (inc. pallet)  
Pieces Per Pallet: 8




**UNIT**  
Dimensions: 48"L x 18"W x 7"H  
Weight: 500± lbs

### SNAPPED FACE



### 4' PALLET (NEW)

Weight: 3,800± lbs (inc. pallet)  
Pieces Per Pallet: 6




**UNIT**  
Dimensions: 48"L x 21"W x 7"H  
Weight: 625± lbs

### SPLITFACE



### 4' XL PALLET

Weight: 2,750± lbs (inc. pallet)  
Pieces Per Pallet: 4




**UNIT**  
Dimensions: 48"L x 24"W x 7"H  
Weight: 675± lbs

### CHISELED FACE



### 5' PALLET (NEW)

Weight: 3,600± lbs (inc. pallet)  
Pieces Per Pallet: 4




**UNIT**  
Dimensions: 60"L x 24"W x 7"H  
Weight: 875± lbs

### SPLITFACE



### 6' PALLET

Weight: 4,000± lbs (inc. pallet)  
Pieces Per Pallet: 3



**UNIT**  
Dimensions: 72"L x 30"W x 7"H  
Weight: 1,320± lbs

### SNAPPED FACE



# FIRE FEATURES

GENERAL INFORMATION  
BELVEDERE® FIRE PIT  
DIMENSIONAL FIRE PIT  
KODAH® FIRE PIT  
BELVEDERE® FIREPLACE



### BASIC INSTALLATION NOTES FOR ROUND & SQUARE FIRE PIT KITS

- Belvedere® Fire Pit
- Dimensional Fire Pit
- Kodah® Fire Pit


Refer to product pages for specific information and details pertaining to individual products.

1. Familiarize yourself with the construction details in this Technical Guide.
2. Mark out the location for your fire pit. Note dimensions shown are nominal so mark an area slightly larger than shown.
3. Excavate for drain stone base (approx. 6")
4. Fill excavated area with drain stone, level, and compact.
5. Place and center steel ring on prepared base.
6. Place blocks per the pattern. (For Round Kit, keep Blocks 1 1/2" off steel ring)
7. **WARNING!** Do not place the fire pit directly atop a patio surface. Instead, the fire pit should be "cut in" to the patio surface to avoid damage to the patio caused by conductive heat transfer.

#### ADDITIONAL STEPS ARE FOR ROUND FIRE PITS ONLY

8. After placing blocks around the ring, adjust the blocks in or out to make the circle close and fit tight. If the blocks do not close the circle, move all blocks slightly in. If the blocks seem too long, move the blocks slightly out.
9. Place caps in circle around fire pit. Adjust the caps in or out to make them fit tightly together.
10. Note: Not suitable for large fires. Fire size should not allow flame to contact Caps on Round Fire Pit.

Gas conversion kits are available for both Round and Square Fire Pit Kits.

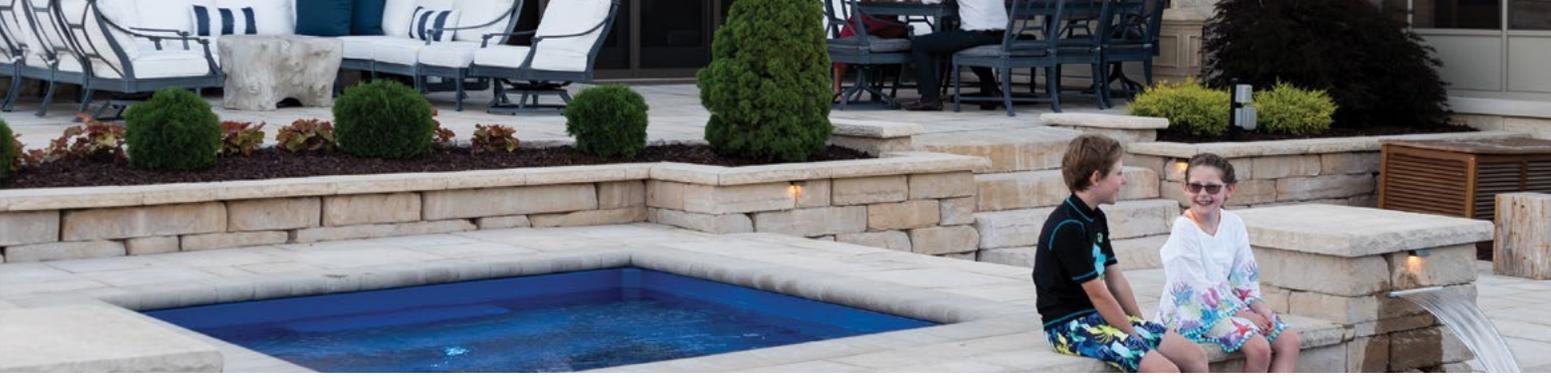


# BELVEDERE® FIRE PIT

## FEATURES

- Featuring the look of weathered fieldstone
- Includes 52 wetcast concrete stones and a 14-gauge steel liner


## PALLET



Dimensions: 42"L x 42"W x 30"H  
 Weight: 1,320 lbs (inc. pallet)

## MATERIAL WETCAST

## INSTALLED PLAN VIEW



Finished Dimensions: 58" Dia. x 14-1/2"H

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE (Special Order)



Refer to our website for the most recent color offerings.


## TYPICAL INSTALLATION

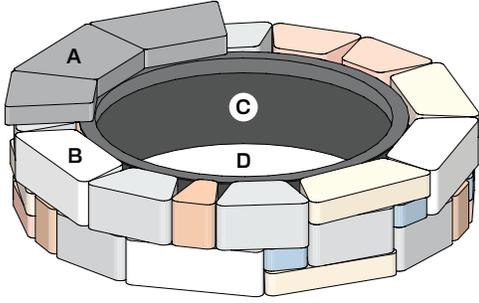

- A. Cap layer (three Cap Blocks shown for reference)
  - B. Belvedere® Fire Pit Blocks
  - C. 14-gauge steel ring (37" dia. opening)
  - D. 6" minimum drainstone base underneath
- (See Block Pattern and Cross Section Detail for more information)

# BELVEDERE® FIRE PIT


## BLOCK PATTERN ELEVATION



### BLOCK KEY (Nominal Dimensions)



## CROSS SECTION

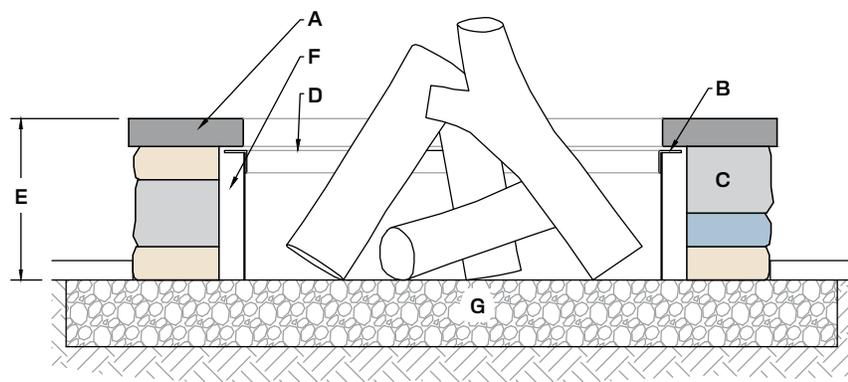

- A. Caps
- B. Caps do not contact lip of steel ring
- C. Belvedere® Fire Pit Blocks
- D. 14-gauge steel ring (37" dia. opening)
- E. 14-1/2" overall height
- F. ±2" gap
- G. 6" minimum drainstone base underneath




# DIMENSIONAL FIRE PIT

## FEATURES

- Featuring the texture of quarried stone
- Includes 36 wetcast concrete stones and a 12-gauge steel liner

## PALLET



Dimensions: 42"x42"x30"  
Weight: 1,130 lbs (inc. pallet)

## MATERIAL WETCAST

### COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)




Refer to our website for the most recent color offerings.

## INSTALLED PLAN VIEW



Finished  
Dimensions: 44" L X 44" W X 12" H

## TYPICAL INSTALLATION

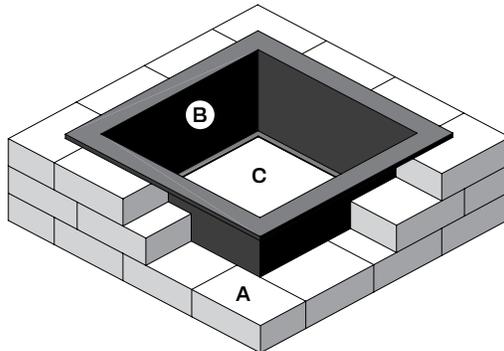

- A. Dimensional Wall Blocks (overlap at corners as shown)
- B. 12-gauge steel ring (28"x28" opening), 12" tall, hangs directly on blocks
- C. 6" minimum drainstone base underneath




# KODAH® FIRE PIT

## FEATURES

- Featuring the modern, clean aesthetic of snapped limestone
- Includes 16 wetcast concrete stones and a 12-gauge steel liner

## PALLET

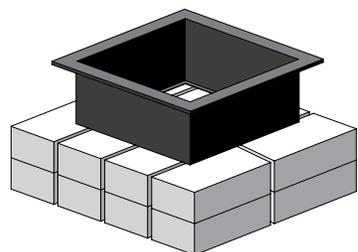

Dimensions: 48"x42"x30"  
 Weight: 1,700 lbs (inc. pallet)

## MATERIAL WETCAST

### COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
 (Special Order)




Refer to our website for the most recent color offerings.

## INSTALLED PLAN VIEW



Finished  
 Dimensions: 51" L X 51" W X 12" H

## TYPICAL INSTALLATION

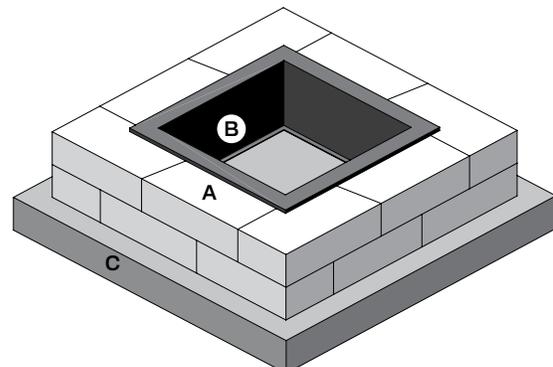

- A. Kodah® Wall Blocks (overlap at corners as shown, and abut matching block tapers)
- B. 12-gauge steel ring (28"x28" opening), 12" tall, hangs directly on blocks
- C. 6" minimum drainstone base underneath



# BELVEDERE® FIREPLACE

## FEATURES

- Each unit piece is a solid precast unit featuring the texture of weathered field stone
- Complete kit, includes everything you need to construct the fireplace. See components.
- No concrete footing required in most cases, saves time and money
- Very easy to install with convenient lift hooks cast into all large components

## PALLETS

1. Includes firebox, insert, small pipe and accessories
2. Includes chimney and large pipe
3. Includes hearth, mantle, cap and spark arrestor

Total Weight: 10,000 lbs

## MATERIAL WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY





AUBURN RIDGE  
(Special Order)



Refer to our website for the most recent color offerings.

## ELEVATIONS

Finished  
Dimensions: 6'L X 3'-8"W X 9'-8"H

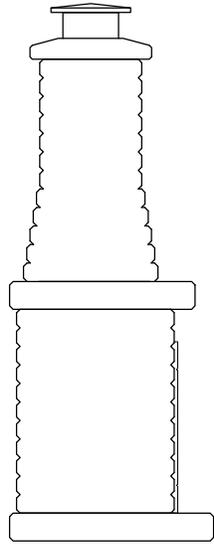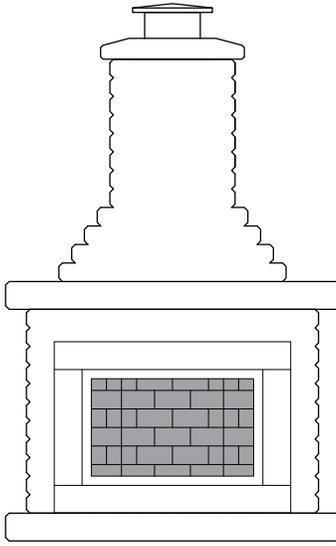


**KIT COMPONENTS**

**MASONRY COMPONENTS**


CAP = 200 LBS




CHIMNEY = 2,300 LBS




MANTLE = 1,400 LBS



FIREBOX = 3,000 LBS




HEARTH = 3,000 LBS

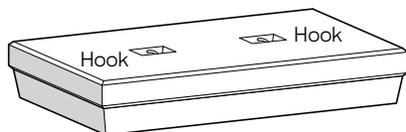

**ADDITIONAL COMPONENTS**


CHIMNEY CAP WITH SPARK ARRESTOR



DOUBLE WALL STAINLESS STEEL CHIMNEY LINER



STAINLESS STEEL FIREPLACE INSERT




ALSO INCLUDED:


- MISCELLANEOUS FASTENERS
- DETAILED INSTRUCTIONS

# BELVEDERE® FIREPLACE

## ASSEMBLED FIREPLACE

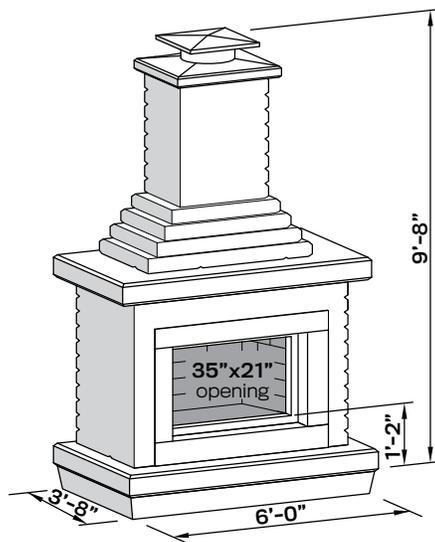


## FOUNDATION INSTALLATION DETAIL

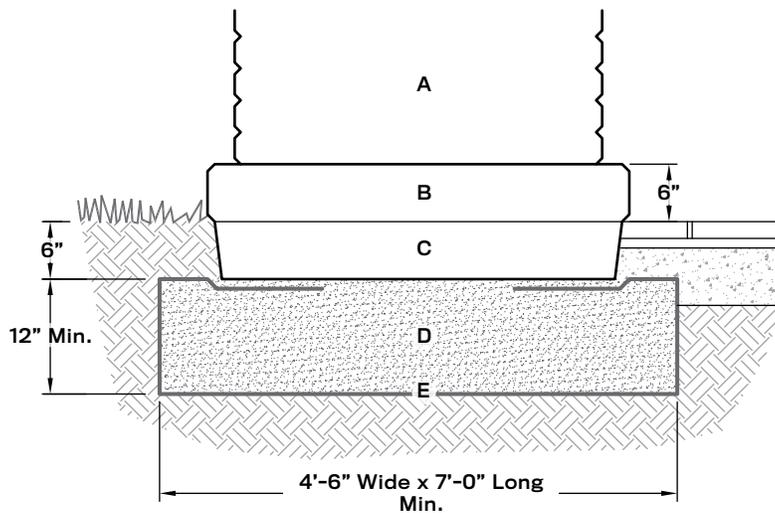

- A. Precast fireplace firebox
- B. Precast fireplace hearth
- C. Bury untextured portion of hearth below grade
- D. Crushed stone footing
- E. Woven geotextile

## HEARTH INSTALLATION DETAIL

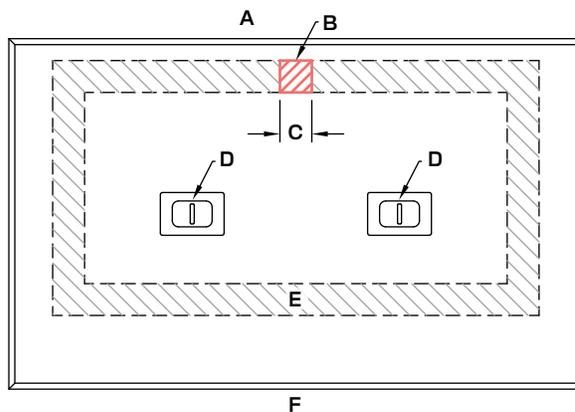

- A. Back side of hearth
- B. No mortar here (for drainage)
- C. 4" centered
- D. Lift hook
- E. Place mortar between scribe lines except where shown
- F. Front side of hearth

## FIREPLACE KIT TYPICAL INSTALLATION

### PLANNING

- Familiarize yourself with all applicable local building codes. Only install the fireplace in a location and in such a way as to meet all relevant codes and requirements.
- Obtain all necessary permits.
- Choosing the proper site orientation for any outdoor fire place is a critical step minimize excess smoke or downdraft. Consider the following when selecting the fire place location and orientation:
  - a. Consider the prevailing wind direction and shelter the opening from the wind and its eddie currents.
  - b. Nearby structures or trees will affect the draw of the chimney. Locating the fireplace under the canopy of a tree may adversely effect the draw of the chimney.
  - c. If the fireplace is built near an enclosure or porch be sure to allow adequate ventilation for any smoke to escape.
- Make sure to install the fireplace an adequate distance from any combustable material and/or structure, including but not limited to, buildings, decks or trees.
- Never install the fireplace in an area near combustable flooring material, such as a wood deck.

### SAFETY

- Prior to starting your project, contact your local utility marking service and have utilities located in project area. Hand dig around utilities that are in or near the location of any excavation.
- Perform all work in accordance with all local and federal OSHA requirements.
- Be sure to use appropriate personal protective equipment at all times. Hard hats must be worn if objects could be lifted overhead, and/or if required by law.
- Never stand under or in the fall-path of any of the components as they are being placed.
- Keep fingers and other extremities above and clear of the bottom surface of each component when placing them.
- Only use equipment and chains that are rated to safely handle the weights of the heaviest piece of the fireplace. Be sure to factor in the working angle of the chain or strap when determining the total load that will be required.
- Wear appropriate fall protection if working at or above heights from which an injury from falling could occur and/or heights that require fall protection according to local and federal safety standards.

### TOOLS AND EQUIPMENT NEEDED TO INSTALL FIREPLACE KIT

- A skid steer, excavator or crane capable of safely lifting 3,000lbs 6' up and 2,300lbs 12' up
- Rated chains or lifting straps capable of lifting 3,000lbs factoring in the angle of the lift
- Plate compactor
- Hand Tools: Shovel, Rake, Trowel, Straight Screwdriver, Pliers,
- Cordless drill capable of drilling into concrete
- Lifting straps for setting chimney cap
- Bucket, mortar tub, or wheelbarrow for mixing mortar.

### STEP 1. PREPARE THE FOOTING

- **Note: The following foundation detail and installation instructions may not be suitable if existing soils are fine-grained clays or silts or if poor soil conditions, such as expansive, compressible, frost-susceptible, or saturated soils, exist at the site. Consult a local geotechnical engineer familiar with the soils in your area if these conditions exist.**
- Excavate for the crushed stone footing according to the Fireplace Foundation Installation Detail.
- Remove topsoil, roots, organic materials, and debris from the excavation.
- Existing subgrade should be firm, granular, and free-draining with a minimum load bearing capacity of 2,000 lbs per square foot. If subgrade soils are disturbed during excavation, compact disturbed soils to 95% of Standard Proctor.
- Install the woven geotextile per the detail shown below(note, weed mat or felt fabric are not suitable alternatives to woven geotextile).
- Place the crushed stone footing in three compacted 4" lifts achieving 95% of Standard Proctor throughout the footing.
- Grade the top of the footing to be level in both directions and 6" below the desired

### STEP 2. INSTALL HEARTH

- Make sure that the crushed stone footing is perfectly level and that the top of the footing is 6" below finished grade.
- Using appropriately rated equipment and lifting chains or straps, place the hearth unit on the prepared footing with the front side facing the the desired location of the firebox opening. Identify the front side according to the Hearth Installation Detail.
- Make sure that the hearth unit is level in both directions, as this will affect the appearance of the finished fireplace. If the hearth is not level, make adjustments accordingly.

**Note: Heat from the fire can potentially cause surface fractures, which won't impact the structural stability of the fireplace**

### STEP 3. INSTALL FIREBOX

- Using the provided mortar, place a thin (approximately 1/4") bed of mortar uniformly around the center of the hearth inside the reference lines that are molded into the hearth. Keep the center 4" at the back clear of mortar to allow for proper drainage (as shown in Hearth Installation Detail).
- While mortar is still fresh, set the firebox on the hearth. Be sure to center the walls of the firebox in the center of the reference lines that are molded into the hearth. Check the firebox for level and make adjustments to the mortar bed as necessary. If the gap between the firebox and the hearth is greater than 1/4", your mortar bed is either too thick, or the mortar was not fresh when the firebox was placed. In this case, remove the firebox, clean off the existing mortar, reapply the mortar thinner and more workable, and reset the firebox.

### STEP 4. INSTALL STAINLESS INSERT

- Prepare the firebox to receive the stainless insert. Clean out excess mortar and debris from the inside and outside of firebox as this will effect how the inserts sits.
- Set Stainless Insert inside firebox. Use care to ensure that insert is not scratched or damaged. Center and level insert in opening.
- Secure the insert to the concrete firebox with the attached screws. Use the top two holes on vertical flanges on each side of the insert. The holes for these screws must be predrilled with the included bit. Prepare chimney opening. (Fasten insert to firebox with screws, unscrew vent collar, remove and save the vent collar, expand chimney opening, test-fit inner chimney pipe in opening).

### STEP 5. INSTALL MANTLE

- Place a uniform, thin bed of mortar around the entire upper surface of the firebox.
- Place mantle on firebox with the front face facing the front of the fireplace (the front face can be identified as it is approximately 8" from the reference line, the back face of the mantle is approximately 3" from the reference line).
- When placing the mantle on the firebox, align it relative to the firebox in the following way: centered side-to-side (approximately a 4.5" overhang on each side), 5" (nominal) overhang in the front, approximately flush in the back.

### STEP 6. INSTALL CHIMNEY

- Place a very thin bed of mortar inside the reference line on the mantle. Too much mortar will cause an unsightly gap to be visible between the mantle and the chimney. Concrete adhesive can be substituted for mortar on this step.
- Set the chimney on the mantle with the front side of the chimney facing the front side of the fireplace (the front is the cleaner looking of the two sides, the back has a slightly visible vertically staggered mold seam). Align the chimney so that it is flush with the outside of the reference lines.

### STEP 7. INSERT CHIMNEY PIPES

- This kit includes two sections of double-wall chimney pipe.
- Remove the inner wall sections from the outer wall sections and connect the two inner wall sections together.
- Insert the connected inner wall section into the chimney and connect it to the crimped open stainless steel insert. (Note, this step will be very difficult if the latter part of Step 4 was not properly followed, including crimping the chimney opening and test-fitting the chimney pipe to the chimney opening).
- Expand the bottom of the outer-wall chimney pipe with pliers.
- Connect the vent collar from Step 4 to the bottom of the outer-wall chimney pipe.
- Connect the two outer wall chimney pipes together.
- Insert the outer-wall chimney pipe and vent collar assembly into the chimney and around the inner wall (Note, the vent collar does not need to be re-screwed to the stainless insert).

### STEP 8. INSTALL CHIMNEY CAP AND SPARK ARRESTOR

- Apply a thin bed of mortar or an appropriate exterior concrete adhesive to the top of the chimney.
- Safely lift and place chimney cap on chimney with lifting straps that are rated to handle the weight of the chimney cap safely. Ensure that the straps are attached to the chimney cap in such a way as to make it impossible for the chimney cap to be dropped during placement. **Be sure that no person is ever below the chimney cap as it is being lifted.**
- Center the chimney cap on the chimney.
- Securely fasten the spark arrestor to the chimney. The easiest way to accomplish is to perform the following:
  - a. Back off the attached spark arrestor anchor screws
  - b. One person lift and hold the outer wall chimney pipe a eight inches above the top of the chimney cap.
  - c. With the outer chimney pipe elevated, lower the spark arrestor onto the outer chimney pipe until the spark arrestor alignment guides are seated on the chimney pipe.
  - d. Securely fasten the spark arrestor anchor screws to the chimney pipe, gradually tightening opposing screws a few turns at a time until all are tightly secured.

### STEP 9. FINISHING TOUCHES

- Clean off any excess mortar or drips from mortar that visible.
- Clean out the weep-hole (small drainage cavity at the bottom center of the backside of the firebox).
- Grade around the hearth in such a way to allow for water to drain away from the fireplace.
- Install non-combustable patio material in front of the fireplace up to grade such that only the textured portion of the hearth is exposed.
- Ensure that the owner of the fireplace receives the included User Manual, and firebox information.


# COPING & CAPS

DIMENSIONAL COPING

BELVEDERE® COPING

24", 30" AND 34" COLUMN CAPS

27" COLUMN CAPS (BELVEDERE®)

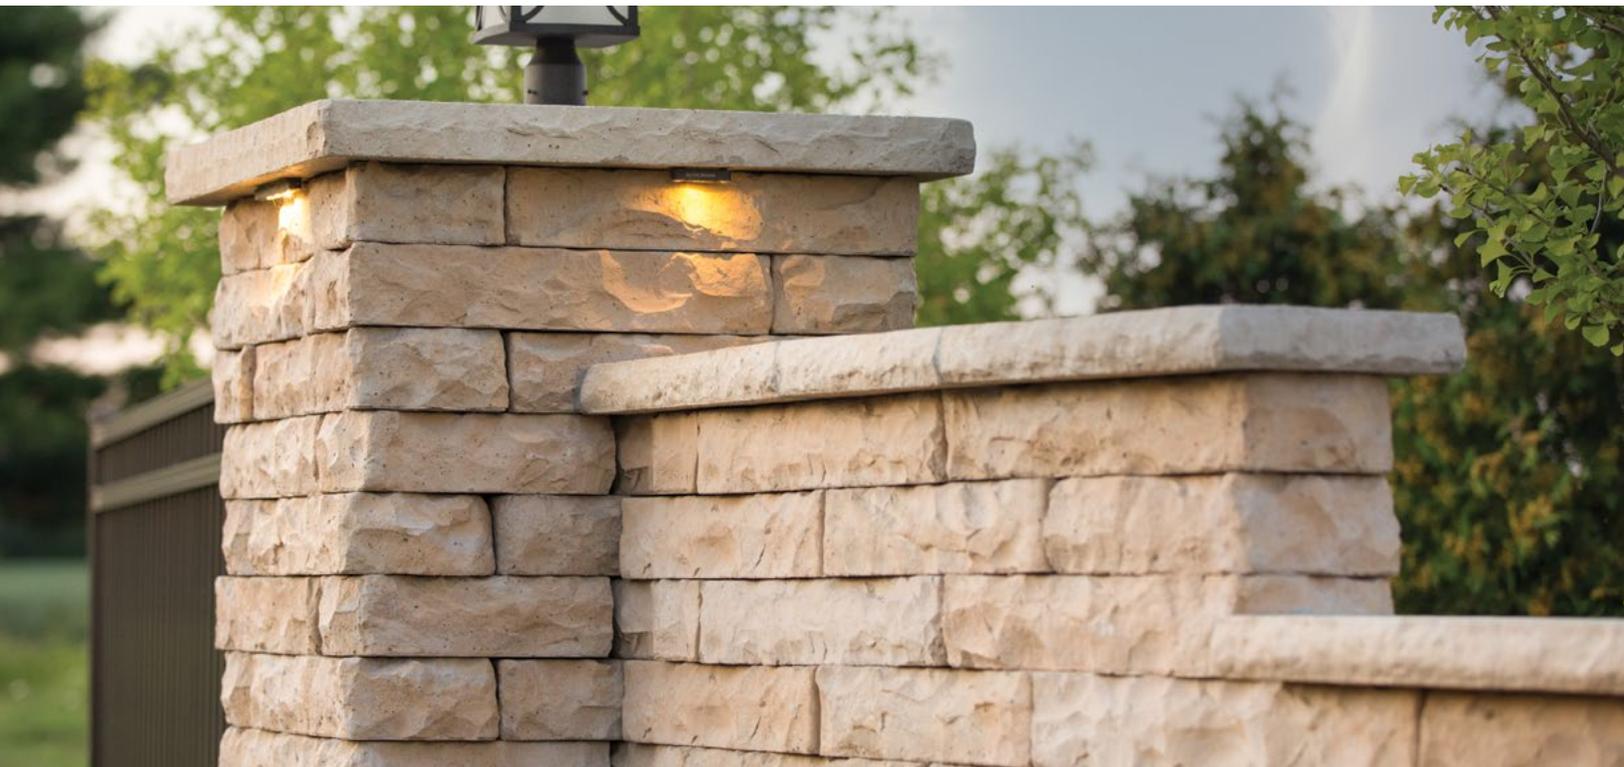




# DIMENSIONAL COPING

## FEATURES


- Chiseled, natural stone texture
- Comfortable dimensions for seat walls
- Formal appearance perfect for any wall application

## PALLET



Weight: 2,000 lbs (inc. pallet)  
 Linear Feet: 63  
 Layers Per Pallet: 6  
 Section: 10.5 linear ft per layer

## MATERIAL WETCAST



### UNIT: 24"


Dimensions: 24"L x 12.5"W x 2.5"H  
 Weight: 63± lbs  
 Units Per Pallet: 18

## COLOR OPTIONS

SUPERIOR BUFF




SLATE GRAY



### UNIT: 18"

Dimensions: 18"L x 12.5"W x 2.5"H  
 Weight: 47± lbs  
 Units Per Pallet: 12

LIMESTONE  
(Special Order)



### UNIT: COPING END

Dimensions: 19"L x 12.5"W x 2.5"H  
 Weight: 49± lbs  
 Units Per Pallet: 6

Refer to our website for the most recent color offerings.




# BELVEDERE® COPING

## FEATURES

- Multiple face textures for each basic block size provide a more random look for your finished project
- Three standard coping blocks are finished on the front, back and top faces with an approximate 1" taper on each side from the front to the back of the block
- Two end units are finished on the front, back, top and one of the sides with approximate 1" taper on one side from the front to the back of the block
- End units are useful for constructing corners and ends

## PALLET



Weight: 1,550± lbs (inc. pallet)  
 Linear Feet: 66  
 Layers Per Pallet: 6  
 Section: 11 linear ft per layer

### UNIT: 9

Dimensions: 6"L x 10.25"W x 2.25"H  
 Weight: 10± lbs  
 Units Per Pallet: 24



## MATERIAL WETCAST

### UNIT: 10

Dimensions: 12"L x 10.25"W x 2.25"H  
 Weight: 20± lbs  
 Units Per Pallet: 24



## COLOR OPTIONS

FOND DU LAC



SLATE GRAY




AUBURN RIDGE  
(Special Order)




### UNIT: 11

Dimensions: 18"L x 10.25"W x 2.25"H  
 Weight: 30± lbs  
 Units Per Pallet: 12




### UNIT: 12 (LEFT END)

Dimensions: 18"L x 10.25"W x 2.25"H  
 Weight: 30± lbs  
 Units Per Pallet: 6



### UNIT: 13 (RIGHT END)

Dimensions: 18"L x 10.25"W x 2.25"H  
 Weight: 30± lbs  
 Units Per Pallet: 6



Refer to our website for the most recent color offerings.




# COLUMN CAPS (24", 30", 34")

## FEATURES

- Dimensional, chiseled face
- Large format and subtle textures
- Designed to coordinate with HIGH FORMAT® wall products

## 24" CAP PALLET

Weight: 1,300± lbs (inc. pallet)



**UNIT: 24"**

Weight: 120± lbs  
Units Per Pallet: 10

## MATERIAL

WETCAST

## COLOR OPTIONS

SUPERIOR BUFF



SLATE GRAY




LIMESTONE  
(Special Order)



## 30" CAP PALLET

Weight: 1,400± lbs (inc. pallet)




**UNIT: 30"**

Weight: 230± lbs  
Units Per Pallet: 6

Refer to our website for the most recent color offerings.

## 34" CAP PALLET

Weight: 1,800± lbs (inc. pallet)



**UNIT: 34"**

Weight: 295± lbs  
Units Per Pallet: 6




# COLUMN CAPS (27" BELVEDERE®)

## FEATURES

- Irregular, weathered edge face
- Large format with Belvedere® texture
- Designed to coordinate with HIGH FORMAT® wall products

## 27" CAP PALLET

Weight: 1,600± lbs (inc. pallet)



**UNIT: 27"**

Weight: 150± lbs

Units Per Pallet: 10

## MATERIAL

WETCAST

## COLOR OPTIONS

FOND DU LAC



SLATE GRAY



AUBURN RIDGE  
(Special Order)



LIMESTONE  
(Special Order)



Refer to our website for the most recent color offerings.



## LIFETIME LIMITED WARRANTY

We want you to feel comfortable and confident when starting your project. That's why we make sure you have the resources you need to get the job done right. Everything we make, we back with a lifetime limited warranty.

HIGH FORMAT® products as manufactured by HIGH FORMAT® are backed by a lifetime limited warranty from the manufacturer to the original end user, for products used in residential applications. This assurance of product quality is applicable where products have been correctly installed to manufacturer's specifications. Any properly installed hardscape material manufactured by HIGH FORMAT® that deteriorates due to the concrete in the product not meeting the design strength specification will be replaced by the manufacturer. The following items are not covered by this warranty: color variances and the appearance of surface stains resulting from chemical reactions such as efflorescence or differential curing; damage caused by installation, misuse or abuse of the materials; deterioration caused by de-icing salts or fertilizers; damage resulting from sub-grade settlement or movement, hairline cracks that do not affect the structural performance of the product, spalling of less than three percent of the surface area, contact with chemicals or paint, discoloration due to airborne contamination, staining, oxidation, or improper sealing. Products purchased must be registered with the manufacturer within 60 days of end user's purchase for warranty to be valid. You may register your project at [HIGHFORMAT.COM/WARRANTY](https://HIGHFORMAT.COM/WARRANTY).

All warranty claims must be made prior to the removal or disposal of the defective product. Warranty claims will be reviewed by a company representative and may require samples of defective product for analysis. Warranty does not include removal, installation, or transportation to replace the material. Warranty is not transferable and is extended to the original end user only. Proof of purchase is required.

**For additional questions please contact us at (877) 777-6558**

NOTE: This warranty applies to Wetcast, TEKTRAMAT®, and VIBRALOCK® products only.



## ADDITIONAL INFORMATION

### COLOR:

We at HIGH FORMAT®, along with our media partners, do our best to produce print and digital materials that accurately reflect the true shades and tones of our product. However, we cannot guarantee perfect color matching for project photos, color swatches, or other picture representations. Final color selection should be made from actual material which can be viewed at your local dealer location.

Integral pigments are incorporated into the raw materials for all HIGH FORMAT® products to intentionally produce subtle shades and color variations throughout each block or paver. Therefore no product seen in a photograph will be precisely duplicated. For the most natural appearance, install products from multiple pallets simultaneously. This will create a blended, natural look.

### EFFLORESCENCE:

Efflorescence is a naturally occurring, chalky, white residue commonly found on concrete surfaces. The presence of efflorescence in no way degrades the integrity of any product. It can usually be removed with efflorescence cleaners and often washes away over time. HIGH FORMAT® does not cover the presence of efflorescence under warranty.

### PACKAGING:

Variation in color can occur where packaging comes into contact with the product. Often, these variations will fade with time. This does not affect the integrity of the material, and it is not considered to be a defect. Color variation caused by contact with packaging materials is not covered under warranty.

### POLYMERIC HAZE:

Improper installation of ancillary polymeric sand products may result in the presence of polymeric haze. This discoloration can potentially mute the vibrant colors of concrete products. Hazing is not indicative of the quality of the HIGH FORMAT® product, and should not be considered a source of concern for the product's durability. Because HIGH FORMAT® cannot regulate selection or installation of aftermarket accessory materials, we do not warranty against the presence of polymeric haze. In general, polymeric haze can be cleaned and washes away over time.

### HEAVY EQUIPMENT:

The broad surface dimensions of HIGH FORMAT®'s slab products are not engineered for vehicular traffic and compaction equipment. The exceptions to this exclusion are the more traditionally dimensioned New Mission and Amaro® pavers. Both New Mission and Amaro® can be used as driveway pavers and/or finish-compacted. If a compactor is used to aid in installation of New Mission or Amaro® Pavers, then a urethane pad should be used with the compactor to protect the detailed surfaces of the pavers from damage.

### NORMAL MAINTENANCE AND CARE:



As with any product that is continually exposed to the natural environment, cleaning and care may be desired over time to maintain the appearance of your hard scapes. Generous rinsing with water and light scrubbing with a stiff, plastic bristle brush is generally the best way to remove dirt that has accumulated over time. Cleaners and mild detergent designed to be used on concrete products may be used as well. Always follow all manufacturer instructions and test on a small area when using any cleaner. Power washers may cause damage at close range.

### WINTER CARE:

All metal snow shovels and snow blower blades have the potential to damage concrete surfaces. All snowplows, snow blowers and shovels used to clear HIGH FORMAT® products of snow should use plastic blades or guards. De-icing salts will damage concrete and should not be used with HIGH FORMAT® products unless they are made with TEKTRAMAT® technology. HIGH FORMAT® does not cover damage done by snow removal, de-icing, or improper loading under warranty.

### NATURAL STONE:

Natural stone is a product of nature. Surface texture and color will vary piece to piece and crate to crate. Our partnering quarries work hard to ship consistent, high quality product, but you should expect variation. Samples are suggested, but will not guarantee color. We highly recommend all material be delivered prior to installation and that available material is blended throughout your project. Each installation will be uniquely different and perfectly created in nature!

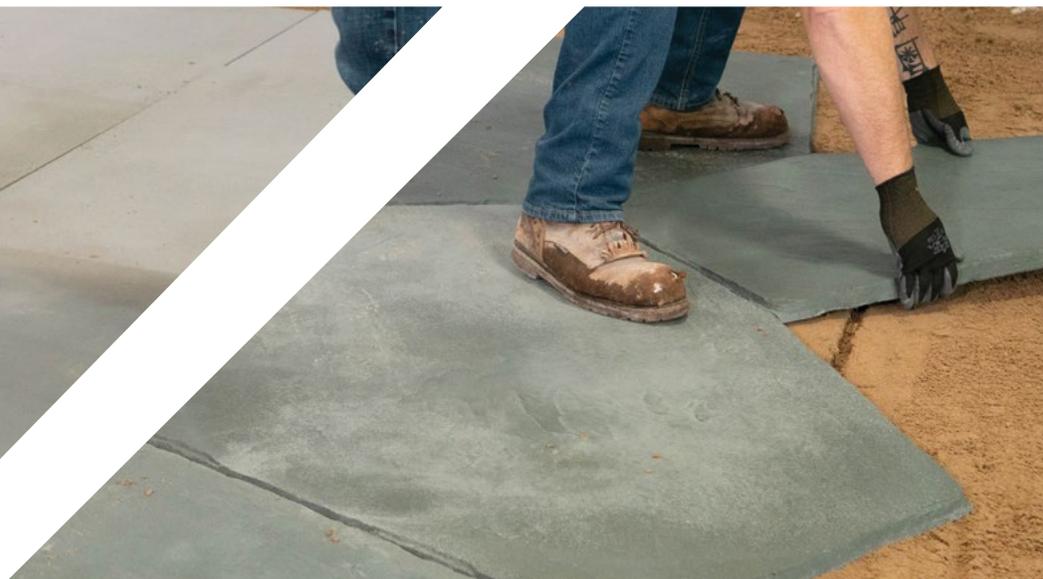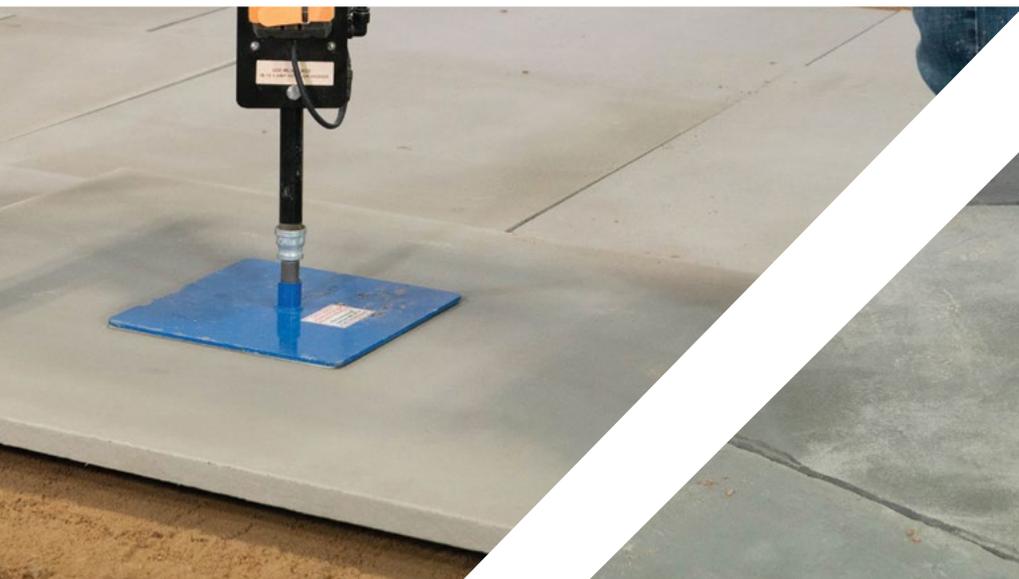

**HIGHFORMAT.COM**  
**(877) 777-6558**

**05481 US 31 SOUTH, CHARLEVOIX, MI 49720**