

2024

**PRODUCT
DATA**



TRANSFORMING
HARDSCAPES

UNILOCK[®]

THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

BUILD VERTICALS FASTER

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours - not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.



Learn more

UNI-CARA[®]
MODULAR SYSTEM

TABLE OF CONTENTS - CHICAGO

PAVERS

ADA Paver	4
Anchorlock™	5
Arcana™	6
Artline™ Il Campo°	7
Artline™ Smooth	8
Artline™ Umbriano°	9
Beacon Hill™ Flagstone	10
Beacon Hill™ Smooth	12
Bristol Valley°	14
Brussels Block°	16
Copthorne°	17
Courtstone°	18
Eco-Line°	19
Eco-Optiloc™	20
Eco-Priora™	21
Eco-Promenade°	22
Promenade EcoTerra™	23
Granito™	24
Hex™	25
Hollandstone™	26
Holland Premier™	28
Mattoni™	29
Natural Stone - Limestone	30
Natural Stone - Sandstone	32
Nordic Cobble™	34
Optiloc°	35
Porcelain	36
Promenade™	39
Richcliff°	41
Series™	42
Skyline™	44
Soreno™	45
Town Hall°	46
Treo° Smooth	47
Tribeca Cobble™	48
Turfstone™	49
Umbriano™	50
Westport™	52
Westport™ Smooth	53

RETAINING WALLS

Brussels Dimensional Stone°	54
DuraHold°	55
Estate Wall™	56
Lineo™ Dimensional Stone	57
Mackinaw™	58
Olde Quarry™	59
Olde Quarry™ Smooth	60
Pisa™	61
Pisa™ Smooth XL	62
Rivercrest° Wall	63
SienaEdge™	64
SienaStone™	65
U-Cara° Multiface Wall System	67
U-Cara° Modular System	72
U-Cara° Wall Mount System	73
Architectural Coping	74
Brussels Fullnose™	75
6x12 Fullnose	76
Ledgestone™	77
Umbriano° Coping	79
Universal U-Grip™ Base	80

FIRE FEATURES

Sunset Firepit	81
Unilock Elements	82


ACCESSORIES

Paver Cleaners and Adhesives	84
Paver Sealers and Sand Products	85
Permeable Chip Products	86
Geotextiles and Fabric Products	86
Gator Base System	87
Edging & Stainless FP Insert	88
Unilock Pedestal System	89


PRODUCT AND INSTALLATION INFORMATION

Sealer and Polysand Best Practices	90
Terms and Conditions of Sale	91
Laying Patterns	92
Freight Rates	94
Important Notes	94
Product Directory	98

APPLICATION INDEX

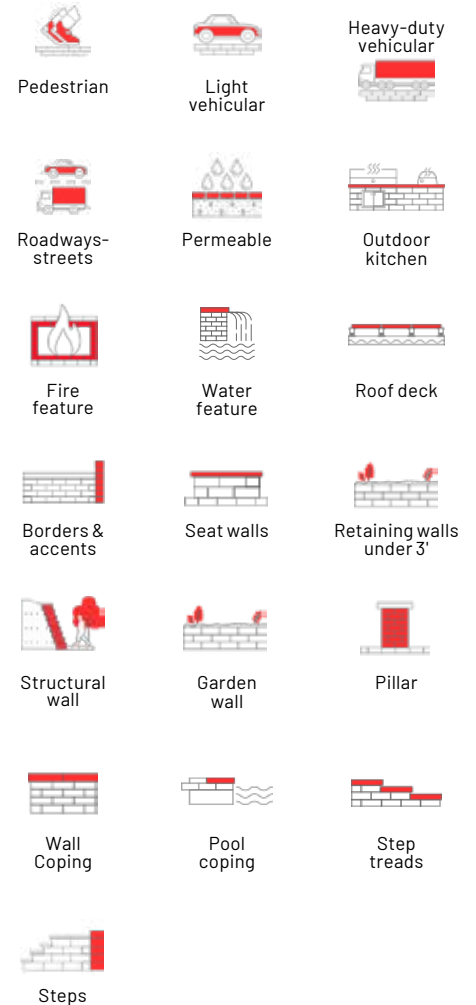

DESCRIPTION OF EDGE DETAILS





APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
 Eligible for LEED v4.1 credits

	12 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Sections	-
	Stone	0.97

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Sections	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	1.02
	Sections	-
	Layer	11.81
	Bundle	94.49

UNITS PER	SqFt	1.03
	Sections	-
	Bundle	96.00

LBS PER	Layer	389
	Sections	-
	Bundle	3,114

COLORS	Reflectance	Stock
Charcoal	SR n/a SRI n/a	SO
Red	SR n/a SRI n/a	SO



CHARCOAL



RED

Single Unit



STANDARD
 300 x 300 x 70mm
 11 7/8 x 11 7/8 x 2 3/4
 96 units/Bundle
 .97 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
 Eligible for LEED v4.1 credits

LAYING PATTERN



Anchorlock A

	8 7/8 x 8 7/8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

SQFT PER	Bundle	86.72
	Layer	10.84
	Sections	-
	Stone	0.41

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.46
	Sections	-
	Bundle	213.36

LBS PER	Layer	374
	Sections	-
	Bundle	2,991

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO



NATURAL

Single Unit



STANDARD
 225 x 225 x 80mm
 8 7/8 x 8 7/8 x 3 1/8
 213.36 units/Bundle
 .41 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY.** 1/3 stones incorporated in each bundle; 16 pieces per bundle. The 1/3 stone is not shown. Product is optimized for mechanical installation. All measurements are nominal. Contact Unilock for more information.



	12 x 24	18 x 24	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM	50 MM

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	4.00	6.00	8.00
	Sections	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.49	0.50	0.50
	Sections	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79

SAILOR LNFT PER	SqFt	0.99	0.66	0.50
	Sections	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79

UNITS PER	SqFt	0.50	0.33	0.25
	Sections	-	-	-
	Bundle	18.00	18.00	18.00

LBS PER	Layer	96	144	192
	Sections	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	✓	✓	✓
Corvara	SR n/a SRI 34	✓	✓	✓
Modena	SR n/a SRI 53	✓	✓	✓
Vivanto	SR n/a SRI 16	✓	✓	✓

APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 0 mm

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits



AVORIO



CORVARA




MODENA




VIVANTO


LAYING PATTERNS



Arcana Random A



Arcana Random C



Arcana Random F



X & T Slab Spacers
Bagged Separately
(see page 86)

Single Units



12 x 24
301 x 606 x 50mm
11⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
2 Sq.Ft./Stone



18 x 24
453 x 606 x 50mm
17⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
3 Sq.Ft./Stone



24 x 24
606 x 606 x 50mm
23⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
4 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Unilock recommends installing Arcana using X & T Slab Spacers. Please see page 86. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Il Campo
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERN



Artline Random A



BAVARIAN BLEND

GRANITE BLEND

	Bundle Type	RANDOM
	Plant Produced	CHICAGO
	Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Sections	-
	Bundle	192.00

LBS PER	Layer	370
	Sections	-
	Bundle	2,963

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	✓
Granite Blend	SR n/a SRI n/a	✓

7 Unit Random Bundle



UNIT A
 125 x 169 x 70mm
 4 7/8 x 6 3/4 x 2 3/4"
 32 units/Bundle
 .23 Sq.Ft./Stone



UNIT B
 125 x 262.5 x 70mm
 4 7/8 x 10 3/8 x 2 3/4"
 32 units/Bundle
 .35 Sq.Ft./Stone

7 Unit Random Bundle



UNIT C
 125 x 337.5 x 70mm
 4 7/8 x 13 3/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT D
 125 x 450 x 70mm
 4 7/8 x 17 3/4 x 2 3/4"
 32 units/Bundle
 .61 Sq.Ft./Stone



UNIT E
 187.5 x 225 x 70mm
 7 1/2 x 8 7/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT F
 187.5 x 337.5 x 70mm
 7 1/2 x 13 3/8 x 2 3/4"
 16 units/Bundle
 .69 Sq.Ft./Stone



UNIT G
 187.5 x 450 x 70mm
 7 1/2 x 17 3/4 x 2 3/4"
 16 units/Bundle
 .91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance

COMFORT STEP

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	MARENGO
	Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Sections	-
	Bundle	192.00

LBS PER	Layer	370
	Sections	-
	Bundle	2,963

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	✓
Fossil	SR n/a SRI 21	✓
Steel Mountain	SR n/a SRI 32	✓

LAYING PATTERN



Artline Random A





BAVARIAN BLEND



FOSSIL



STEEL MOUNTAIN

7 Unit Random Bundle		
	UNIT A 125 x 169 x 70mm 4 7/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone	UNIT B 125 x 262.5 x 70mm 4 7/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone

7 Unit Random Bundle					
	UNIT C 125 x 337.5 x 70mm 4 7/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone	UNIT D 125 x 450 x 70mm 4 7/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61 Sq.Ft./Stone	UNIT E 187.5 x 225 x 70mm 7 1/2 x 8 7/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone	UNIT F 187.5 x 337.5 x 70mm 7 1/2 x 13 3/8 x 2 3/4" 16 units/Bundle .69 Sq.Ft./Stone	UNIT G 187.5 x 450 x 70mm 7 1/2 x 17 3/4 x 2 3/4" 16 units/Bundle .91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYSOAK™

Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Sections	-
	Bundle	192.00

LBS PER	Layer	373
	Sections	-
	Bundle	2,986

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓

LAYING PATTERN



Artline Random A



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

7 Unit Random Bundle



UNIT A
 125 x 169 x 70mm
 4 7/8 x 6 3/4 x 2 3/4"
 32 units/Bundle
 .23 Sq.Ft./Stone



UNIT B
 125 x 262.5 x 70mm
 4 7/8 x 10 3/8 x 2 3/4"
 32 units/Bundle
 .35 Sq.Ft./Stone

7 Unit Random Bundle



UNIT C
 125 x 337.5 x 70mm
 4 7/8 x 13 3/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT D
 125 x 450 x 70mm
 4 7/8 x 17 3/4 x 2 3/4"
 32 units/Bundle
 .61 Sq.Ft./Stone



UNIT E
 187.5 x 225 x 70mm
 7 1/2 x 8 7/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT F
 187.5 x 337.5 x 70mm
 7 1/2 x 13 3/8 x 2 3/4"
 16 units/Bundle
 .69 Sq.Ft./Stone



UNIT G
 187.5 x 450 x 70mm
 7 1/2 x 17 3/4 x 2 3/4"
 16 units/Bundle
 .91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C



ALPINE GREY



BAVARIAN



FOSSIL



WALNUT

		XL UNIT	
Bundle Type	RANDOM	SINGLE	
Plant Produced	MARENGO	MARENGO	
Thickness (mm)	60 MM	60 MM	

SQFT PER	Bundle	116.57	116.57
	Layer	11.66	11.66
	Section	-	-
	Stone	-	5.83

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.32
	Section	-	-
	Layer	-	3.74
	Bundle	-	37.40

SAILOR LNFT PER	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30

UNITS PER	SqFt	-	0.17
	Section	-	-
	Bundle	80.00	20.00

LBS PER	Layer	322	324
	Section	-	-
	Bundle	3,221	3,241

COLORS	Reflectance	Stock	Stock
Alpine Grey	SR n/a SRI n/a	✓	✓
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Walnut	SR n/a SRI n/a	✓	-

3 Unit Random Bundle				Single Unit	
	LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone	SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone	SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone		XL UNIT 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B



BAVARIAN



FOSSIL



WALNUT

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

SQFT PER	Bundle	81.60
	Layer	11.66
	Section	-
	Stone	-

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	65.45

UNITS PER	SqFt	-
	Section	-
	Bundle	56.00

LBS PER	Layer	426
	Section	-
	Bundle	2,979

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Walnut	SR n/a SRI n/a	✓

3 Unit Random Bundle



LARGE RECTANGLE
 380 x 570 x 80mm
 15 x 22 1/2 x 3 1/8"
 14 Units/Bundle
 2.08 SqFt./Stone



SQUARE
 380 x 380 x 80mm
 15 x 15 x 3 1/8"
 21 units/Bundle
 1.39 Sq.Ft./Stone



SMALL RECTANGLE
 380 x 190 x 80mm
 15 x 7 1/2 x 3 1/8"
 21 units/Bundle
 .69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES


ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™ (Champagne and Opal)
 Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BAVARIAN




DARK CHARCOAL



FOSSIL



GRANITE FUSION



IVORY



CHAMPAGNE



OPAL BLEND

3 Unit Random Bundle



LARGE RECTANGLE
 380 x 570 x 60mm
 15 x 22 1/2 x 2 3/8"
 20 Units/Bundle
 2.08 Sq.Ft./Stone



SQUARE
 380 x 380 x 60mm
 15 x 15 x 2 3/8"
 30 units/Bundle
 1.39 Sq.Ft./Stone




SMALL RECTANGLE
 380 x 190 x 60mm
 15 x 7 1/2 x 2 3/8"
 30 units/Bundle
 .69 Sq.Ft./Stone

Single Unit



SMALL RECTANGLE
 380 x 190 x 60mm
 15 x 7 1/2 x 2 3/8"
 150 Units/Bundle
 .78 Sq.Ft./Stone



XL UNIT
 950 x 570 x 60mm
 37 1/2 x 22 1/2 x 2 3/8"
 20 units/Bundle
 5.83 Sq.Ft./Stone

		SMALL RECTANGLE	XL UNIT
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	MARENGO	MARENGO	MARENGO
Thickness (mm)	60 MM	60 MM	60 MM

SQFT PER	Bundle	116.57	116.57	116.57
	Layer	11.66	11.66	11.66
	Sections	-	-	-
	Stone	-	0.78	5.83

PER BUNDLE	Layers	10.00	10.00	10.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	0.80	0.32
	Sections	-	-	-
	Layer	-	9.35	3.74
	Bundle	-	93.50	37.40

SAILOR LNFT PER	SqFt	0.80	1.60	0.53
	Sections	-	-	-
	Layer	9.35	18.70	6.23
	Bundle	93.50	187.01	62.30

UNITS PER	SqFt	-	1.29	0.17
	Sections	-	-	-
	Bundle	80.00	150.00	20.00

LBS PER	Layer	322	315	325
	Sections	-	-	-
	Bundle	3,216	3,150	3,249

COLORS	Reflectance	Stock	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	✓	✓
Dark Charcoal	SR n/a SRI n/a	-	✓	-
Fossil	SR .22 SRI 21	✓	-	✓
Granite Fusion	SR .28 SRI 29	✓	✓	✓
Ivory	SR n/a SRI n/a	-	✓	-
Champagne	SR n/a SRI n/a	✓	✓	✓
Opal Blend	SR n/a SRI n/a	✓	-	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS




APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYSOAK™  (Opal Only)
 Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

SQFT PER	Bundle	81.60
	Layer	11.66
	Section	-
	Stone	-


PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	65.45

UNITS PER	SqFt	-
	Section	-
	Bundle	56.00


LBS PER	Layer	426
	Section	-
	Bundle	2,982

COLORS	Reflectance	Stock
Bavarian	SR .22 SRI 21	✓
Fossil	SR .28 SRI 29	SO
Granite Fusion	SR .28 SRI 29	✓
Opal Blend 	SR .28 SRI 29	SO

LAYING PATTERNS



BeaconHill Fixed
Random A



BeaconHill Fixed
Random B



BAVARIAN



FOSSIL



GRANITE FUSION



OPAL BLEND

3 Unit Random Bundle		LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 1/2 x 3 1/8" 14 Units/Bundle 2.08 SqFt/Stone		SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone		SMALL RECTANGLE 380 x 190 x 80mm 15 x 7 1/2 x 3 1/8" 21 units/Bundle .69 Sq.Ft./Stone
-----------------------------	---	--	---	---	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR[™]
 Refined surface and long-lasting color

EASYSOFT[™]

Factory sealed to provide integral stain resistance


COMFORT STEP

Ultra smooth surface texture


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Random A



Bristol Valley Random B

		XL UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	116.57	116.57
	Layer	11.66	11.66
	Section	-	-
	Stone	-	5.83

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-


SOLDIER LNFT PER	SqFt	-	0.32
	Section	-	-
	Layer	-	3.74
	Bundle	-	37.40

SAILOR LNFT PER	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30


UNITS PER	SqFt	-	0.17
	Section	-	-
	Bundle	80.00	20.00

LBS PER	Layer	330	321
	Section	-	-
	Bundle	3,302	3,210

COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Steel Mountain	SR n/a SRI n/a	✓	✓
Walnut	SR n/a SRI n/a	✓	-



BAVARIAN







FOSSIL



STEEL MOUNTAIN



WALNUT

3 Unit Random Bundle				Single Unit	
	LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.08 SqFt./Stone	SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone	SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone		XL UNIT 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR[™]
 Refined surface and long-lasting color

EASYSOFT[™]

Factory sealed to provide integral stain resistance


COMFORT STEP

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

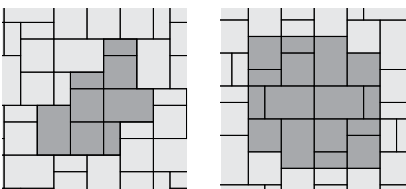

Bristol Valley Random A Bristol Valley Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

SQFT PER	Bundle	81.60
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Sections	-
	Layer	9.35
	Bundle	65.45

UNITS PER	SqFt	-
	Sections	-
	Bundle	56.00

LBS PER	Layer	418
	Sections	-
	Bundle	2,925

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	SO
Steel Mountain	SR n/a SRI n/a	✓



BAVARIAN



FOSSIL



STEEL MOUNTAIN

3 Unit Random Bundle



LARGE RECTANGLE
 380 x 570 x 80mm
 15 x 22 1/2 x 3 1/8"
 14 Units/Bundle
 2.08 SqFt./Stone



SQUARE
 380 x 380 x 80mm
 15 x 15 x 3 1/8"
 21 units/Bundle
 1.39 Sq.Ft./Stone



SMALL RECTANGLE
 380 x 190 x 80mm
 15 x 7 1/2 x 3 1/8"
 21 units/Bundle
 69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Weathered
 Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


ANTIQUED™

Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Brussels Multi-Unit
 Random AC



Brussels Multi-Unit
 Random AD



Brussels Multi-Unit
 Random AE

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	ELKHORN / CHICAGO		
Thickness (mm)	70 MM	70 MM	70 MM

SQFT PER	Bundle	88.70	94.91	95.70
	Layer	11.09	11.86	9.57
	Sections	12.67	15.82	31.90
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	8.00	8.00	10.00
	Sections	7.00	6.00	3.00

SOLDIER LNFT PER	SqFt	1.72	1.44	0.86
	Sections	21.84	22.70	27.30
	Layer	19.11	17.03	8.19
	Bundle	152.86	136.22	81.89

SAILOR LNFT PER	SqFt	2.87	1.73	1.43
	Sections	36.33	27.30	45.67
	Layer	31.78	20.47	13.70
	Bundle	254.28	163.78	137.01

UNITS PER	SqFt	5.05	2.53	1.25
	Sections	64.00	40.00	40.00
	Bundle	448.00	240.00	120.00

LBS PER	Layer	358	389	311
	Sections	409	518	1,037
	Bundle	2,865	3,110	3,112

COLORS	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
River	SR n/a SRI 34	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓



LIMESTONE



RIVER



SANDSTONE



SIERRA

Single Units



HALF
 104 x 173 x 70mm
 4 x 6 7/8 x 2 3/4"
 448 units/Bundle
 .20 Sq.Ft./Stone



STANDARD
 173 x 208 x 70mm
 6 7/8 x 8 1/4 x 2 3/4"
 240 units/Bundle
 .40 Sq.Ft./Stone



XL
 208 x 348 x 70mm
 8 1/4 x 13 3/4 x 2 3/4"
 120 units/Bundle
 .80 Sq.Ft./Stone

Notes: **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Surface Texture - Textured

Joint Spacing - 3 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place concrete

EASYSKID™


Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYING PATTERNS



Copthorne BW A



Copthorne RB C



ARCTIC GREY



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK



STEEL BLUE

Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	60 MM

SQFT PER	Bundle	89.20
	Layer	11.15
	Sections	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.43
	Sections	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Sections	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Sections	-
	Bundle	600.00

LBS PER	Layer	294
	Sections	-
	Bundle	2,349

COLORS	Reflectance	Stock
Arctic Grey	SR 49 SRI 57	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI 38	✓
Burnt Clay	SR n/a SRI 40	✓
Old Oak	SR n/a SRI 41	✓
Steel Blue	SR n/a SRI n/a	✓

Single Unit



STANDARD

65 x 200 x 60mm
2 5/8 x 7 7/8 x 2 3/8"
600 Units/Bundle
.15 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 15 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from European cobblestones

ULTIMA™

Up to 4x stronger than poured-in-place concrete

EASYCLEAN™


Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

Bundle Type		RANDOM	
Plant Produced		AYR	
Thickness (mm)		60 MM	
SQFT PER	Bundle	98.30	
	Layer	12.29	
	Sections	-	
	Stone	-	
PER BUNDLE	Layers	8.00	
	Sections	-	
SOLDIER LNFT PER	SqFt	-	
	Sections	-	
	Layer	-	
	Bundle	-	
SAILOR LNFT PER	SqFt	2.25	
	Sections	-	
	Layer	27.69	
	Bundle	221.52	
UNITS PER	SqFt	-	
	Sections	-	
	Bundle	384.00	
LBS PER	Layer	291	
	Sections	-	
	Bundle	2,326	
COLORS		Reflectance	Stock
Basalt		SR n/a SRI n/a	✓

LAYING PATTERNS



Courtstone Fixed Random A



BASALT

5 Unit Random Bundle	XL RECTANGLE	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	SQUARE
	215 x 130 x 60mm 8 1/2 x 5 x 2 3/8"	185 x 130 x 60mm 7 3/8 x 5 x 2 3/8"	165 x 130 x 60mm 6 1/2 x 5 x 2 3/8"	145 x 130 x 60mm 5 x 5 3/4 x 2 3/8"	130 x 130 x 60mm 5 x 5 x 2 3/8"
	128 Units/Bundle .30 SqFt/Stone	64 Units/Bundle .28 SqFt/Stone	64 Units/Bundle .23 SqFt/Stone	64 Units/Bundle .20 SqFt/Stone	64 Units/Bundle .18 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Custom (see below)
 Umbriano Mottled / Il Campo Brushed
 Joint Spacing - 6.25 mm
 Void - 5.80%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™  (Umbriano)

Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Ecoline Fixed Random A

Bundle Type	RANDOM
Plant Produced	MULTI-PLANT
Thickness (mm)	100 MM

SQFT PER	Bundle	55.17
	Layer	11.03
	Sections	-
	Stone	-

PER BUNDLE	Layers	5.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Sections	-
	Bundle	160.00

LBS PER	Layer	513
	Sections	-
	Bundle	2,564

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local Sales Representative for color options.		



CLASSIC
Thrumix Finish



IL CAMPO®
Brushed Finish











SERIES™
Exposed Granite Finish



SMOOTH
Premier Finish



UMBRIANO®
Mottled Finish with/
ColorFusion and EasyClean

8 Unit Random Bundle								
	UNIT A	UNIT B	UNIT C	UNIT D	UNIT E	UNIT F	UNIT G	UNIT H
	357 x 84 x 100mm	317 x 84 x 100mm	277 x 84 x 100mm	237 x 84 x 100mm	357 x 114 x 100mm	317 x 114 x 100mm	277 x 114 x 100mm	237 x 114 x 100mm
	14 x 3 3/8 x 3 7/8"	12 1/2 x 3 3/8 x 3 7/8"	10 7/8 x 3 3/8 x 3 7/8"	9 3/8 x 3 3/8 x 3 7/8"	14 x 4 1/2 x 3 7/8"	12 1/2 x 4 1/2 x 3 7/8"	10 7/8 x 4 1/2 x 3 7/8"	9 3/8 x 4 1/2 x 3 7/8"
	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle	20 Units/Bundle
	.32 SqFt/Stone	.29 SqFt/Stone	.25 SqFt/Stone	.21 SqFt/Stone	.44 SqFt/Stone	.39 SqFt/Stone	.34 SqFt/Stone	.29 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Chamfer
- Surface Texture - Custom (see below)
- Umbriano Mottled / Il Campo Brushed
- Joint Spacing - 7mm
- Void - 7.3%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™  (Umbriano)

Factory sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoOptiloc Cluster A

		ALL FINISHES
	Bundle Type	SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	80 MM

SQFT PER	Bundle	84.80
	Layer	10.60
	Sections	-
	Stone	0.50

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Sections	-
	Bundle	168.00

LBS PER	Layer	358
	Sections	-
	Bundle	2,860

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local Sales Representative for color options.		



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ColorFusion and EasyClean

Single Unit



STANDARD

- 250 x 250 x 80mm
- 9 7/8 x 9 7/8 x 3 1/8"
- 168 Units/Bundle
- .50 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Micro
- Surface Texture - Smooth / Custom (see below)
- Umbriano Mottled / Il Campo Brushed
- Joint Spacing - 7mm
- Void - 4.6-7.08%

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™  (Umbriano)

Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS

See laying patterns on page 92.

	CLASSIC	ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	80 MM	80 MM

SQFT PER	Bundle	75.95	75.95
	Layer	10.85	10.85
	Section	-	-
	Stone	0.31	0.31

PER BUNDLE	Layers	7.00	7.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.27	1.27
	Section	-	-
	Layer	13.78	13.78
	Bundle	96.46	96.46

SAILOR LNFT PER	SqFt	2.54	2.54
	Section	-	-
	Layer	27.56	27.56
	Bundle	192.91	192.91

UNITS PER	SqFt	3.23	3.23
	Section	-	-
	Bundle	245.00	245.00

LBS PER	Layer	381	388
	Section	-	-
	Bundle	2,669	2,717

COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	-	✓
River	SR .32 SRI 34	✓	-
Sierra	SR n/a SRI n/a	✓	-
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO

Please contact your local Sales Representative for color options.



CLASSIC Thrumix Finish

IL CAMPO® Brushed Finish

SERIES™ Exposed Granite Finish

SMOOTH Premier Finish

UMBRIANO® Mottled Finish with/ColorFusion and EasyClean

Single Units



RECTANGLE
120 x 240 x 80mm
4¾ x 9½ x 3 ⅛"
245 units/Bundle
.31 Sq.Ft./Stone

Herringbone Bundle



RECTANGLE
120 x 240 x 80mm
4¾ x 9½ x 3 ⅛"
217 units/Bundle



SMALL UNIT
120 x 120 x 80mm
4¾ x 4¾ x 3 ⅛"
56 units/Bundle

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Custom (see below)
 Umbriano Mottled / Il Campo Brushed
 Joint Spacing - 7 mm
 Void - 10.12 %

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSKIN™  (Umbriano)

Factory sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoPromenade
3x12 RB_A



EcoPromenade
3x12_DHB_B



CLASSIC
Thrumix Finish



IL CAMPO®
Brushed Finish



SERIES™
Exposed Granite Finish



SMOOTH
Premier Finish



UMBRIANO®
Mottled Finish with/
ColorFusion and EasyClean

Single Unit



STANDARD

75 x 300 x 100mm
 3 x 11 7/8 x 3 7/8"
 264 units/Bundle
 .24 Sq.Ft./Stone

		ALL FINISHES
	Bundle Type	SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	100 MM

SQFT PER	Bundle	63.94
	Layer	10.66
	Section	-
	Stone	0.24

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	10.83
	Bundle	64.96

SAILOR LNFT PER	SqFt	4.06
	Section	-
	Layer	43.31
	Bundle	259.84

UNITS PER	SqFt	4.13
	Section	-
	Bundle	264.00

LBS PER	Layer	465
	Section	-
	Bundle	2,789

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local Sales Representative for color options.		

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

ECOTERRA®

Reduced carbon emissions and refined surface protection

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49


SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	393
	Section	-
	Bundle	3,140

COLORS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	✓
Light Steel Gray	SR n/a SRI n/a	✓

LAYING PATTERNS



4x12 RB_A



4x12 HB_C



LIGHT OPAL BLEND



LIGHT STEEL GRAY

Single Unit



4 x 12
 100 x 300 x 70 mm
 3⁷/₈ x 11⁷/₈ x 2³/₄
 288 units/Bundle
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Granito Textured
 Joint Spacing - 7 mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

ARTISTA™

Boldly mottled color finish


EASYCLEAN™

Factory Sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Granito Fixed Random_A



Pattern Hex_A



SABIA



SCURO

	ENDURACOLOR	HEX
Bundle Type	RANDOM	SINGLE
Plant Produced	PICKERING	PICKERING
Thickness (mm)	60 MM	70 MM

SQFT PER	Bundle	94.14	73.92
	Layer	10.46	9.24
	Section	-	-
	Stone	-	2.6

PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	0.85	-
	Section	-	-
	Layer	8.86	-
	Bundle	79.72	-

UNITS PER	SqFt	-	0.39
	Section	-	-
	Bundle	72.00	192.00

LBS PER	Layer	287	306.24
	Section	-	-
	Bundle	2,583	2,450

COLORS	Reflectance	Stock	Stock
Sabia	SR n/a SRI n/a	✓	✓
Scuro	SR n/a SRI n/a	✓	✓

3-Unit Random Bundle



SMALL RECTANGLE
 180 x 360 x 60mm
 7 x 14 1/4 x 2 3/8"
 27 units/Bundle



SQUARE
 360 x 360 x 60mm
 14 1/4 x 14 1/4 x 2 3/8"
 27 units/Bundle



LARGE RECTANGLE
 360 x 540 x 60mm
 14 1/4 x 21 1/4 x 2 3/8"
 18 units/Bundle

Single Unit



HEX
 200 x 200 x 70mm
 7 7/8 x 7 7/8 x 2 3/4"
 192 units/Bundle
 .42 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3 mm

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™ 

Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



HexPaver A



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

		8 x 8	8 x 8
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	70 MM

SQFT PER	Bundle	108.31	73.92
	Layer	10.83	9.24
	Section	-	-
	Stone	0.45	0.39

PER BUNDLE	Layers	10.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

UNITS PER	SqFt	2.22	2.60
	Layer	24	24
	Bundle	240.00	192.00

LBS PER	Layer	276	306
	Section	-	-
	Bundle	2,762	2,450

COLORS	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	SO
Midnight Sky	SR .17 SRI 15	✓	SO
Winter Marvel	SR .35 SRI 38	✓	SO

Single Unit



205 x 205 x 60mm
 8 x 8 x 2 3/8"
 240 Units/Bundle
 .45 SqFt/Stone



200 x 200 x 70mm
 7 7/8 x 7 7/8 x 2 3/4"
 192 Units/Bundle
 .39 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Hollandstone 4x8
RB_B



Hollandstone 4x8
HB_C



Hollandstone 4x8
BW_D



AUTUMN RED



CHARCOAL



RIVER



SIERRA

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	118.00
	Layer	11.80
	Section	19.67
	Stone	0.22

PER BUNDLE	Layers	10.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	29.53
	Layer	17.72
	Bundle	177.17

SAILOR LNFT PER	SqFt	3.00
	Section	59.06
	Layer	35.43
	Bundle	354.33

UNITS PER	SqFt	4.58
	Section	90.00
	Bundle	540.00

LBS PER	Layer	323
	Section	538
	Bundle	3,229

COLORS	Reflectance	Stock
Autumn Red	SR n/a SRI n/a	✓
Charcoal	SR .12 SRI 9	✓
River	SR .32 SRI 34	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



STANDARD
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 540 units/Bundle
 .22 Sq.Ft./Stone

Notes: **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth / Series Exposed
 Umbriano Mottled / Il Campo Brushed
 Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano®)

Factory sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano®)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Hollandstone 4x8 RB_LB



CLASSIC
Thruxim Finish



IL CAMPO®
Brushed Finish



SERIES™
Exposed Granite Finish



SMOOTH
Premier Finish



UMBRIANO®
Mottled Finish with/
ColorFusion and EasyClean

	4 x 8	HERRINGBONE
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	80 MM	80 MM

SQFT PER	Bundle	82.60	82.60
	Layer	11.80	11.80
	Section	-	-
	Stone	0.22	0.22

PER BUNDLE	Layers	7.00	7.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.50	-
	Section	-	-
	Layer	17.71	-
	Bundle	124.00	-

SAILOR LNFT PER	SqFt	3.00	-
	Section	-	-
	Layer	35.43	-
	Bundle	248.03	-

UNITS PER	SqFt	4.58	4.58
	Section	-	-
	Bundle	378.00	378.00

LBS PER	Layer	429	423
	Section	-	-
	Bundle	3,005	2,963

COLORS	Reflectance	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local Sales Representative for color options.			

Single Unit



STANDARD
 100 x 200 x 80mm
 3 7/8 x 7 7/8 x 3 1/8"
 378 units/Bundle
 .22 Sq.Ft./Stone

Herringbone Bundle



RECTANGLE
 100 x 200 x 80mm
 3 7/8 x 7 7/8 x 3 1/8"
 350 Units/Bundle



SMALL UNIT
 100 x 200 x 80mm
 3 7/8 x 3 7/8 x 3 1/8"
 56 Units/Bundle

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Holland Premier
4x8 RB_B




Holland Premier
4x8 HB_C



Holland Premier
4x8 BW_D



CHARLESTON



DARK CHARCOAL




GRANITE



HERITAGE BROWN



IVORY



RIVER



SIERRA

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	118.00
	Layer	11.80
	Section	-
	Stone	0.22

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.50
	Section	-
	Layer	17.72
	Bundle	177.17

SAILOR LNFT PER	SqFt	3.00
	Section	-
	Layer	35.43
	Bundle	354.33

UNITS PER	SqFt	4.58
	Section	-
	Bundle	540.00

LBS PER	Layer	327
	Section	-
	Bundle	3,270

COLORS	Reflectance	Stock
Charleston	SR n/a SRI 36	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Heritage Brown	SR n/a SRI n/a	✓
Ivory	SR n/a SRI n/a	✓
River	SR .22 SRI 19	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



STANDARD
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 540 units/Bundle
 .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES


ENDURACOLOR™
 Refined surface and long-lasting color

ANTIQUED™
 Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Mattoni RB_A




Mattoni HB_C



COCOA BROWN



DARK CHARCOAL



GRANITE FUSION



SABLE

	SMOOTH
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	111.60
	Layer	11.16
	Section	-
	Stone	0.16

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	141.73

SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	566.92

UNITS PER	SqFt	6.45
	Section	-
	Bundle	720.00

LBS PER	Layer	306
	Section	-
	Bundle	3,062

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI 29	✓
Sable	SR n/a SRI n/a	✓

Single Unit



STANDARD
 60 x 240 x 60mm
 2 3/8 x 9 1/2 x 2 3/8"
 720 Units/Bundle
 .16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Limestone Slabs



	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM	22 MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS



APPEARANCE


Edge Detail - Sawn Edge

Surface Texture - Riven


TECHNICAL INFORMATION

More information is available online.


LAYING PATTERNS



Pattern 12x24 RB A



Pattern 24x24 RB B



Pattern Multi-Unit C



BLACK RIVER

Single Units	12 x 24	18 x 24	24 x 24	24 x 36
	300 x 600 x 22mm	450 x 600 x 22mm	600 x 600 x 22mm	600 x 900 x 22mm
	11 7/8 x 23 5/8 x 7/8"	17 3/4 x 23 5/8 x 7/8"	23 5/8 x 23 5/8 x 7/8"	23 5/8 x 35 1/2 x 7/8"
	2.0 Sq.Ft./Stone	3.0 Sq.Ft./Stone	4.0 Sq.Ft./Stone	6.0 Sq.Ft./Stone
	90 units/Crate	62 units/Crate	40 units/Crate	30 units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. Please see important notice on page 94 regarding installation practices. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. **Product is not intended for vehicular applications.**

Natural Stone - Limestone Steps, Coping and Pillar Cap



	48 x 12 ROCK FACED COPING	48 x 14 ROCK FACED COPING	24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 MM	50 MM	64 MM	64 MM

UNITS PER	Crate	20.00	20.00	14.00	12.00
	SqFt	-	-	-	-

LBS PER	Unit	106	128	186	200
	Crate	2,122	2,552	2,606	2,402

APPLICATIONS



APPEARANCE

Edge Detail - Rock Faced
Surface Texture - Riven

TECHNICAL INFORMATION

More information is available online.



BLACK RIVER

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓

	48 x 16 STEP
Bundle Type	SINGLE
Thickness (mm)	150 MM




FCFT PER	Crate	32.00
----------	-------	-------

LNFT PER	Crate	24.00
----------	-------	-------

UNITS PER	Crate	6.00
-----------	-------	------

LBS PER	Unit	421
	Crate	2,526

COLORS	Stock
Black River	✓

48" Step		48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4" 6 units/Crate	
Pillar Cap		24" PILLAR CAP 600 x 600 x 64mm 23 5/8 x 23 5/8 x 2 5/8" 14 units/Crate	28" PILLAR CAP 710 x 710 x 64mm 28 x 28 x 2 5/8" 12 units/Crate
Coping		48 x 12 ROCK FACE 1,200 x 300 x 50mm 47 1/4 x 11 7/8 x 2" 20 units/Crate	48 x 14 ROCK FACE 1,200 x 344 x 50mm 47 1/4 x 13 5/8 x 2" 20 units/Crate

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. **Product is not intended for vehicular applications.**

Natural Stone - Sandstone Slabs



	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM	22 MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

APPLICATIONS



APPEARANCE

Edge Detail

Sawn Edge (Golden Sand, Greyfield and Ivory Sand)

Rock Faced (Autumn Harvest and Stone Cliff Grey)

Surface Texture

Brushed (Golden Sand, Greyfield and Ivory Sand)


Riven (Autumn Harvest and Stone Cliff Grey)

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	✓	✓	✓	✓
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	✓	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓


TECHNICAL INFORMATION

More information is available online.


LAYING PATTERNS



NaturalStone
12x24 RB A



NaturalStone 24x24
RB B



NaturalStone Multi-
Unit C



AUTUMN HARVEST



GOLDEN SAND



GREYFIELD



IVORY SAND



STONE CLIFF GREY

Single Units



12 x 24
300 x 600 x 22mm
11 7/8 x 23 5/8 x 7/8"
90 units/Crate
2.0 Sq.Ft./Stone



18 x 24
450 x 600 x 22mm
17 3/4 x 23 5/8 x 7/8"
62 units/Crate
3.0 Sq.Ft./Stone



24 x 24
600 x 600 x 22mm
23 5/8 x 23 5/8 x 7/8"
40 units/Crate
4.0 Sq.Ft./Stone



24 x 36
600 x 900 x 22mm
23 5/8 x 35 1/2 x 7/8"
30 units/Crate
6.0 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY. This product is not intended for vehicular applications.** Unilock offers adjustable pedestals. ** Product is only available to dealers. ** Please see important notice on page 94 regarding installation practices. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Steps, Coping and Pillar Cap



APPLICATIONS



APPEARANCE

Edge Detail - Rock Faced

Surface Texture

Brushed (Golden Sand, Greyfield and Ivory Sand)

Riven (Stone Cliff Grey)

TECHNICAL INFORMATION

More information is available online.

	48 x 16 STEP
Bundle Type	SINGLE
Thickness (mm)	150 MM

FCFT PER	Crate	32.00
-----------------	-------	-------

LNFT PER	Crate	24.00
-----------------	-------	-------

UNITS PER	Crate	6.00
------------------	-------	------

LBS PER	Unit	421
	Crate	2,526

COLORS		Stock
Ivory Sand		SO

	48 x 12 4' FULLNOSE COPING	48 x 12 4' ROCK FACED COPING	48 x 14 4' ROCK FACED COPING	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 MM	50 MM	50 MM	65 MM	65 MM

UNITS PER	Crate	20.00	20.00	20.00	14.00	12.00
	SqFt	-	-	-	-	-

LBS PER	Unit	106	106	128	186	200
	Crate	2,116	2,122	2,552	2,606	2,402

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	✓	-	SO	SO
Greyfield	SR n/a SRI n/a	✓	✓	-	-	-
Ivory Sand	SR n/a SRI n/a	✓	✓	-	✓	SO
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓



GOLDEN SAND



GREYFIELD



IVORY SAND



STONE CLIFF GREY

Pillar Caps



**24 x 24
PILLAR CAP**
600 x 600 x 65mm
23 5/8 x 23 5/8 x 2 5/8"
14 units/Crate



**28 x 28
PILLAR CAP**
725 x 725 x 65mm
28 5/8 x 28 5/8 x 2 5/8"
12 units/Crate

Step & Coping



48 x 16 STEP
1,200 x 150 x 400mm
47 1/4 x 5 7/8 x 15 3/4"
6 units/Crate
Ivory Sand Only
SPECIAL ORDER



4' FULLNOSE 48 x 12
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"
20 units/Crate



4' ROCK FACE 48 x 12
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"
20 units/Crate



4' ROCK FACE 48 x 14
1,200 x 50 x 350mm
47 1/4 x 2 x 13 7/8"
20 units/Crate
Stone Cliff Grey Only



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


LAYING PATTERNS




NordicCobble_A



NordicCobble_Fan




NordicCobble_Circle



DARK CHARCOAL



GRANITE FUSION



OPAL

	PREMIER
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	98.25
	Layer	9.83
	Section	-
	Stone	0.09

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	3.39
	Section	-
	Layer	33.31
	Bundle	333.07

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	10.99
	Section	-
	Bundle	1,080

LBS PER	Layer	230.00
	Section	-
	Bundle	2,300

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal	SR n/a SRI n/a	✓

Single Unit



STANDARD
89.9 x 94 x 60mm
3 5/8 x 3 3/4 x 2 3/8"
1,080 units/Bundle
.09 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS




APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Custom (see below)
 Umbriano Mottled / Il Campo Brushed
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


EASYCLEAN™  (Umbriano)
 Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)
 Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Optiloc A



Optiloc B



CLASSIC
Thrumix Finish



IL CAMPO®
Brushed Finish



SERIES™
Exposed Granite Finish



SMOOTH
Premier Finish



UMBRIANO®
Mottled Finish with/
ColorFusion and EasyClean

		ALL FINISHES
	Bundle Type	SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	80 MM

SQFT PER	Bundle	77.33
	Layer	9.67
	Section	-
	Stone	0.54

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	122.83

SAILOR LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	122.83

UNITS PER	SqFt	1.86
	Section	-
	Bundle	144.00

LBS PER	Layer	350
	Section	-
	Bundle	2,801

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local Sales Representative for color options.		

Single Unit



STANDARD
 260 x 260 x 80mm
 10 ¼ x 10 ¼ x 3 ⅞"
 144 units/Bundle
 .54 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Surface Texture - Stone Finish


TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS



Porcelain 24x24
RB_A



Porcelain 24x24
SB_B



CHAMONIX BIANCO




CHAMONIX GREY



GOTHAM GREY



GOTHAM NERO



NEW ENGLAND WHITE



NEW ENGLAND IVORY



NEW ENGLAND
COLD GRAY



TRAVSTONE BEIGE

	DEL CONCA SQUARE PRESSED EDGE	DEL CONCA COPING
Bundle Type	SINGLE	SINGLE
Thickness (mm)	20 MM	30 MM

SQFT PER	Crate	248.00	-
	Box	7.75	-
	Unit	3.88	-

PER CRATE	Box	32.00	38.00
	SqFt	248.00	-
	Unit	64.00	38.00

UNITS PER	Crate	64.00	38.00
	Box	2.00	1.00

LBS PER	Unit	36	30
	SqFt	9	-
	Box	72	30
	Crate	2,288	1,127

COLORS	Reflectance	Stock	Stock
Chamonix Bianco	SR n/a SRI n/a	✓	-
Chamonix Grey	SR n/a SRI n/a	✓	-
Gotham Grey	SR n/a SRI n/a	✓	✓
Gotham Nero	SR n/a SRI n/a	✓	-
New England White	SR n/a SRI n/a	✓	-
New England Ivory	SR n/a SRI n/a	✓	-
New England Cold Gray	SR n/a SRI n/a	✓	-
Travstone Beige	SR n/a SRI n/a	✓	✓

Single Units



DEL CONCA SQUARE
600 x 600 x 20mm
23 5/8 x 23 5/8 x 7/8"
3.88 Sq.Ft./Stone
64 Units/Crate



DEL CONCA COPING
330 x 600 x 30mm
13 x 23 5/8 x 1 1/4"
38 Units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Porcelain tile is available for purchase by Unilock Authorized Dealers only. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



APPLICATIONS



APPEARANCE

Surface Texture - Woodgrain Finish (DelConca) & Stone Finish


TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS



Porcelain 16x32
RB_C




Porcelain 16x32
HB_D




COSMIC GREY



DOVE GREY
TRAVERTINE



NEW ENGLAND WHITE



NEW ENGLAND IVORY



NEW ENGLAND
COLD GRAY



QUARTZITE
DARK GRAY



QUARTZITE SAND

	DEL CONCA RECTANGLE PRESSED EDGE	UNILOCK RECTANGLE PRESSED EDGE
Bundle Type	SINGLE	SINGLE
Thickness (mm)	20 MM	20 MM

SQFT PER	Pallet	165.36	186.00
	Box	6.89	6.89
	Unit	3.45	3.44

PER PALLET	Box	24.00	27.00
	SqFt	165.36	186.00
	Unit	48.00	54.00

UNITS PER	Pallet	48.00	54.00
	Box	2.00	2.00

LBS PER	Unit	32	32
	SqFt	9	9
	Box	64	64
	Pallet	1,538	1,726

COLORS	Reflectance	Stock	Stock
Cosmic Grey	SR n/a SRI n/a	-	✓
Dove Grey Travertine	SR n/a SRI n/a	-	✓
New England White	SR n/a SRI n/a	✓	-
New England Ivory	SR n/a SRI n/a	✓	-
New England Cold Gray	SR n/a SRI n/a	✓	-
Quartzite Dark Gray	SR n/a SRI n/a	✓	-
Quartzite Sand	SR n/a SRI n/a	✓	-

Single Unit



DEL CONCA RECTANGLE
400 x 800 x 20mm
15 3/4 x 31 1/2 x 7/8"
3.45 Sq.Ft./Stone
48 Units/Crate



UNILOCK RECTANGLE
400 x 800 x 20mm
15 3/4 x 31 1/2 x 7/8"
3.44 Sq.Ft./Stone
54 Units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Porcelain tile is available for purchase by UniLock Authorized Dealers only. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact UniLock for more information. Porcelain tile is not covered by UniLock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



APPLICATIONS




APPEARANCE

Surface Texture - Stone Finish


TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS



Porcelain Fixed
Random_G



Porcelain Fixed
Random_H



TRAVSTONE BEIGE

	DEL CONCA MODULAR BUNDLE	
	Bundle Type	RANDOM
	Thickness (mm)	20 MM

SQFT PER	Pallet	434.00
	Box	-
	Unit	-

PER PALLET	Box	-
	SqFt	-
	Unit	-

UNITS PER	Pallet	192
	Box	-

LBS PER	Unit	-
	SqFt	-
	Box	-
	Pallet	3,973

COLORS	Reflectance	Stock
Travstone Beige	SR n/a SRI n/a	✓

Modular Bundle



12 x 12
300 x 300 x 20mm
11 7/8 x 11 7/8 x 7/8"
64 units/62 Sq.Ft.



12 x 24
300 x 600 x 20mm
11 7/8 x 23 5/8 x 7/8"
64 units/124 Sq.Ft.



24 x 24
600 x 600 x 20mm
23 5/8 x 23 5/8 x 7/8"
64 units/248 Sq.Ft.

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information.
Product is not intended for vehicular applications.



APPLICATIONS




APPEARANCE

Edge Detail - Rounded
 Surface Texture - Custom (see below)
 Umbriano Mottled / Il Campo Brushed
 Joint Spacing - 4 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™  (Umbriano)
 Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	6 x 24	6 x 24
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	70 MM	150 MM

SQFT PER	Bundle	93.00	46.50
	Layer	11.62	11.63
	Section	-	-
	Stone	0.97	0.97

PER BUNDLE	Layers	8.00	4.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.51	0.51
	Section	-	-
	Layer	-	5.91
	Bundle	47.24	23.62


SAILOR LNFT PER	SqFt	2.03	2.03
	Section	-	-
	Layer	23.63	23.62
	Bundle	-	94.49

UNITS PER	SqFt	1.03	1.03
	Section	-	-
	Bundle	96.00	48.00

LBS PER	Layer	372	798
	Section	-	-
	Bundle	2,978	3,192

COLORS	Reflectance	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local Sales Representative for color options.			

LAYING PATTERN



Promenade Multi-Unit Random G



CLASSIC Thrumix Finish

IL CAMPO® Brushed Finish

SERIES™ Exposed Granite Finish

SMOOTH Premier Finish

UMBRIANO® Mottled Finish with/ColorFusion and EasyClean

Single Units



6 x 24
 150 x 600 x 70mm
 5 7/8 x 23 3/8 x 2 3/4"
 72 units/Bundle
 1.29 Sq.Ft./Stone



6 x 24
 150 x 600 x 150mm
 5 7/8 x 23 3/8 x 5 7/8"
 48 units/Bundle
 .97 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Multi-Finish Available
 Joint Spacing - 4 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

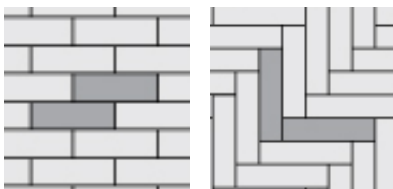

Promenade 4x12
 RB_H

Promenade 4x16
 HB_C



CLASSIC
 Thrumix Finish

IL CAMPO®
 Brushed Finish

SERIES™
 Exposed Granite Finish

SMOOTH
 Premier Finish

UMBRIANO®
 Mottled Finish with/
 ColorFusion and EasyClean

		3 x 12	4 x 12	4 x 16	8 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	100 MM	100 MM	100 MM	100 MM
SQFT PER	Bundle	63.94	58.13	51.67	51.67
	Layer	10.66	11.63	10.33	10.33
	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
PER BUNDLE	Layers	6.00	5.00	5.00	5.00
	Sections	-	-	-	-
SOLDIER LNFT PER	SqFt	1.35	1.02	0.76	0.51
	Section	-	-	-	-
	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	59.06	39.37	26.25
SAILOR LNFT PER	SqFt	4.06	3.05	3.05	1.52
	Section	-	-	-	-
	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	177.17	157.48	78.74
UNITS PER	SqFt	4.13	3.10	2.32	0.77
	Section	-	-	-	-
	Bundle	264.00	180.00	120.00	40.00
LBS PER	Layer	465	532	469	483
	Section	-	-	-	-
	Bundle	2,789	2,659	2,345	2,414
COLORS		Reflectance	Stock	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO	SO	SO
Please contact your local Sales Representative for color options.					

Single Units



3 x 12
 75 x 300 x 100mm
 3 x 11 7/8 x 3 7/8"
 264 units/Bundle
 .24 Sq.Ft./Stone



4 x 12
 100 x 300 x 100mm
 3 7/8 x 11 7/8 x 3 7/8"
 180 units/Bundle
 .32 Sq.Ft./Stone



4 x 16
 100 x 400 x 100mm
 3 7/8 x 15 3/4 x 3 7/8"
 120 units/Bundle
 .43 Sq.Ft./Stone



8 x 24
 200 x 600 x 100mm
 7 7/8 x 23 5/8 x 3 7/8"
 40 units/Bundle
 1.29 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. **Please note that weights are only estimated as custom finishes will alter bundle weight.** Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Surface Texture - Textured

Joint Spacing - 10 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™

Factory sealed to provide integral stain resistance

REALA™

Cast from natural stone

ULTIMA™


Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits


LAYING PATTERNS



Richcliff Fixed Random A



Richcliff Fixed Random B



Richcliff LargeRec HB_H



DAWN MIST



PEBBLE TAUPE



SMOKE SHALE

		LARGE RECTANGLE	
Bundle Type		RANDOM	SINGLE
Plant Produced		AYR	AYR
Thickness (mm)		60 MM	60 MM

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	-	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-





SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	-	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	✓
Pebble Taupe	SR n/a SRI n/a	✓	✓
Smoke Shale	SR n/a SRI n/a	✓	✓

3 Unit Random Bundle		RECTANGLE 226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 SqFt./Stone		SQUARE 226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone		SMALL RECTANGLE 150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone	Single Unit		LARGE RECTANGLE 302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone
----------------------	---	---	---	--	---	---	-------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Series Exposed
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Series_4x8_HB_G



Series_4x8_RB_F



GOLDEN TAN



ONYX BLACK

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	117.90
	Layer	11.79
	Section	19.67
	Stone	0.22

PER BUNDLE	Layers	10.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	29.53
	Layer	17.72
	Bundle	177.17

SAILOR LNFT PER	SqFt	3.01
	Section	59.06
	Layer	35.43
	Bundle	354.33

UNITS PER	SqFt	4.58
	Section	90.00
	Bundle	540.00

LBS PER	Layer	306
	Section	511
	Bundle	3,065

COLORS	Reflectance	Stock
Golden Tan	SR n/a SRI n/a	✓
Onyx Black	SR n/a SRI n/a	✓

Single Unit



4 x 8
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 540 units/Bundle
 .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Series Exposed
 Joint Spacing - 3 mm

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Series 4x12_RB_L



Series 4x12_HB_M



Series 4x12_DHB_N



ARCTIC GREY



NORDIC STAR

	4 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	✓

Single Unit



4 x 12
 100 x 300 x 80mm
 3 7/8 x 11 7/8 x 3 1/8"
 288 units/Bundle
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 2 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1 credits

LAYING PATTERNS




Skyline 24x24_SB_A



Skyline 24x24_RB_B



CHAMOIS



SILVER GREY

Single Unit		<p>24 x 24 606 x 606 x 50mm 23 7/8 x 23 7/8 x 2" 20 units/Bundle 4.00 Sq.Ft./Stone</p>		<p>PEDESTAL SYSTEM Contact your local Unilock Rep for more information.</p>
-------------	---	---	--	---

	24 x 24
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	50 MM

SQFT PER	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

UNITS PER	SqFt	0.25
	Section	-
	Bundle	20.00

LBS PER	Layer	183
	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR. 41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications.** Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



APPLICATIONS




APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 0 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


EASYSOAK™ 
 Factory sealed to provide integral stain resistance

COMFORT STEP™
 Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Soreno 16x32 RB_A

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM

SQFT PER	Bundle	64.27	64.27
	Layer	3.57	3.57
	Section	-	-
	Stone	3.57	3.57

PER BUNDLE	Layers	18.00	18.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.37	0.38
	Section	-	-
	Layer	1.34	1.34
	Bundle	24.04	24.12

SAILOR LNFT PER	SqFt	0.75	0.75
	Section	-	-
	Layer	2.67	2.67
	Bundle	48.13	48.06

UNITS PER	SqFt	0.28	0.28
	Section	-	-
	Bundle	18.00	18.00

LBS PER	Layer	86	86
	Section	-	-
	Bundle	1,549	1,549

COLORS	Reflectance	Stock	Stock
Light Granite	SR n/a SRI 50	✓	-
Toscana Beige	SR n/a SRI 77	✓	-
Dark Charcoal	SR n/a SRI n/a	-	✓



LIGHT GRANITE



TOSCANA BEIGE

Single Units



16 x 32
 407 x 815 x 50mm
 16 x 32 x 2"
 18 units/Bundle
 3.57 Sq.Ft./Stone



PEDESTAL SYSTEM
 Contact your local Unilock Rep for more information.

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 10 mm
 Void - 6.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYSOAK™ 

Factory sealed to provide integral stain resistance

REALA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Town Hall 4x10 DHB_B



Town Hall 4x10 HB_B



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

	STANDARD
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 MM

SQFT PER	Bundle	88.41
	Layer	11.05
	Section	-
	Stone	0.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓

Single Units



STANDARD
 250 x 100 x 70mm
 9 7/8 x 3 7/8 x 2 3/4"
 320 units/Bundle
 .28 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 7mm
 Void - 5.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	SMOOTH
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	108.99
	Layer	10.90
	Section	-
	Stone	-

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	1.35
	Section	-
	Layer	14.76
	Bundle	147.64

UNITS PER	SqFt	-
	Section	-
	Bundle	210.00

LBS PER	Layer	295
	Section	-
	Bundle	2,949

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	✓

LAYING PATTERNS



Treo Fixed Random_R Treo Fixed Random_S



GRANITE



RIVER



SIERRA



TUSCANY

Random Bundle		LARGE RECTANGLE 225 x 337.5 x 60mm 8 7/8 x 13 3/8 x 2 3/8" 60 units/Bundle .82 Sq.Ft./Stone		SQUARE 225 x 225 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone		SMALL RECTANGLE 112.5 x 225 x 60mm 4 1/2 x 8 7/8 x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone
----------------------	---	--	---	--	---	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Series Exposed Textured
 Joint Spacing - 10mm
 Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	SERIES EXPOSED TEXTURED
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	-
	Section	-
	Bundle	304.00

LBS PER	Layer	378
	Section	-
	Bundle	3,022

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓

LAYING PATTERNS






Tribeca Cobble Fixed
 Random_A



COBALT GREY



PEPPERED GRANITE

Random Bundle		LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone		RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾" 88 units/Bundle .32 Sq.Ft./Stone		SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 7/8 x 2 ¾" 128 units/Bundle .25 Sq.Ft./Stone
----------------------	---	--	---	---	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2mm
 Void - 40%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	SMOOTH
Bundle Type	SINGLE
Plant Produced	CHICAGO/ ELKHORN
Thickness (mm)	80 MM

SQFT PER	Bundle	80.00
	Layer	10.00
	Section	-
	Stone	2.50

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.40
	Section	-
	Bundle	32.00

LBS PER	Layer	249
	Section	-
	Bundle	1,995

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

LAYING PATTERNS



Turfstone A



NATURAL

Single Unit



LARGE RECTANGLE
 400 x 600 x 80mm
 15 ¾ x 23 ⅝ x 3 ⅛"
 32 units/Bundle
 2.50 Sq.Ft./Stone

Notes: **Special Order - lead time is required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



*8x16 unit only

APPEARANCE

Edge Detail - Rounded
Surface Texture - Umbriano Mottled
Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR[™]
Refined surface and long-lasting color

EASYCLEAN[™]

Factory sealed to provide integral stain resistance


COLORFUSION[™]

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano Fixed
Random_A



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

Single Unit



8 x 16
200 x 400 x 70mm
7 7/8 x 15 3/4 x 2 3/8"
96 units/Bundle
.86 Sq.Ft./Stone

		XL	4 x 8	8 x 16
Bundle Type	RANDOM	SINGLE	SINGLE	SINGLE
Plant Produced	MARENGO	MARENGO	MARENGO	GEORGETOWN
Thickness (mm)	60 MM	60 MM	60 MM	70 MM

SQFT PER	Bundle	116.57	116.57	118.00	82.67
	Layer	11.66	11.66	11.80	10.33
	Section	-	-	-	-
	Stone	-	5.83	0.22	0.86

PER BUNDLE	Layers	10.00	10.00	10.00	8.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	-	0.32	1.50	0.76
	Section	-	-	-	-
	Layer	-	3.74	17.72	7.87
	Bundle	-	37.40	159.45	62.99

SAILOR LNFT PER	SqFt	0.80	0.53	3.00	1.52
	Section	-	-	-	-
	Layer	9.35	6.23	35.43	15.75
	Bundle	93.50	62.30	318.90	125.98

UNITS PER	SqFt	-	0.17	4.58	1.16
	Section	-	-	-	-
	Bundle	80.00	20.00	540.00	96.00

LBS PER	Layer	320	320	320	331
	Section	-	-	-	-
	Bundle	3,199	3,199	3,201	2,647

COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	-	SO
Grenada White	SR n/a SRI n/a	✓	✓	-	-
Midnight Sky	SR .17 SRI 15	✓	-	✓	SO
Summer Wheat	SR .42 SRI 48	✓	✓	-	SO
Winter Marvel	SR .35 SRI 38	✓	-	-	SO

Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 units/Bundle
2.331 Sq.Ft./Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 units/Bundle
1.554 Sq.Ft./Stone



SMALL RECTANGLE
190 x 380 x 60mm
7 1/2 x 15 x 2 3/8"
30 units/Bundle
.77 Sq.Ft./Stone

Single Units



XL
570 x 950 x 60mm
22 1/2 x 37 1/2 x 2 3/8"
20 units/Bundle
5.83 Sq.Ft./Stone



4 x 8
100 x 200 x 60mm
4 x 8 x 2 3/8"
540 units/Bundle
.22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Only the 8x16 is approved for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3 mm

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR[™]

Refined surface and long-lasting color

EASYCLEAN[™] 

Factory sealed to provide integral stain resistance


COLORFUSION[™]

Subtly mottled colored finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano 4x12 HB_1



Umbriano 4x12 RB_H

	4 x 12
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	80 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓



FRENCH GREY




MIDNIGHT SKY



WINTER MARVEL

Single Unit



4 x 12
 100 x 300 x 80mm
 3 7/8 x 11 7/8 x 3 1/8"
 288 units/Bundle
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



		RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	ELKHORN	ELKHORN
Thickness (mm)	70 MM	70 MM

SQFT PER	Bundle	94.19	94.19
	Layer	11.77	11.77
	Section	-	-
	Stone	-	0.34

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.71
	Section	-	-
	Layer	-	8.33
	Bundle	-	66.67

SAILOR LNFT PER	SqFt	1.24	1.42
	Section	-	-
	Layer	14.57	16.67
	Bundle	116.56	133.33

UNITS PER	SqFt	-	2.97
	Section	-	-
	Bundle	160.00	280.00

LBS PER	Layer	372	361
	Section	-	-
	Bundle	2,976	2,884

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	✓	-
Sierra	SR n/a SRI n/a	✓	-

APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


CLASSIC COAT

Factory-sealed to protect surface texture and color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Westport Fixed
Random_A




Westport Fixed
Random_B



CHARCOAL







GRANITE



RIVER



SIERRA

Random Bundle		LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone		SQUARE 254 x 254 x 70mm 10 x 10 x 2 ¾" 56 units/Bundle .67 Sq.Ft./Stone		RECTANGLE 127x 254 x 70mm 5 x 10 x 2 ¾" 72 units/Bundle .34 Sq.Ft./Stone	Single Unit		RECTANGLE 127x 254 x 70mm 5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone
---------------	---	---	---	--	--	---	-------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix

CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

		5 x 10
Bundle Type	RANDOM	SINGLE
Plant Produced	ELKHORN	ELKHORN
Thickness (mm)	70 MM	70 MM

SQFT PER	Bundle	94.19	94.19
	Layer	11.77	11.77
	Section	-	-
	Stone	0.59	0.34

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.71
	Section	-	-
	Layer	-	8.33
	Bundle	-	66.67


SAILOR LNFT PER	SqFt	1.24	1.42
	Section	-	-
	Layer	14.57	16.67
	Bundle	116.56	133.33

UNITS PER	SqFt	1.70	2.97
	Section	-	-
	Bundle	160.00	280.00


LBS PER	Layer	372	361
	Section	-	-
	Bundle	2,976	2,884

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	✓	-
Sierra	SR n/a SRI n/a	✓	-

LAYING PATTERNS



Westport Fixed
Random_A



Westport Fixed
Random_B



CHARCOAL







GRANITE



RIVER



SIERRA

Random Bundle		LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 3/4" 32 units/Bundle 1.01 Sq.Ft./Stone		SQUARE 254 x 254 x 70mm 10 x 10 x 2 3/4" 56 units/Bundle .67 Sq.Ft./Stone		RECTANGLE 127x 254 x 70mm 5 x 10 x 2 3/4" 72 units/Bundle .34 Sq.Ft./Stone	Single Unit		5 x 10 127x 254 x 70mm 5 x 10 x 2 3/4" 280 units/Bundle .34 Sq.Ft./Stone
----------------------	---	---	---	--	---	---	--------------------	---	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

SUNSET FIREPIT KITS

Located on page 80



ROUND



SQUARE

	TAPERED	STANDARD
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	36.00	32.00
	Layer	6.00	5.33
	Stone	0.25	0.33

PER BUNDLE	Layers	6.00	6.00
	Sections	-	4.00

LNFT PER	Bundle	108.00	96.00
	Unit	0.75	1.00

UNITS PER	SqFt	4.00	3.00
	Section	-	24.00
	Bundle	144.00	96.00

LBS PER	Layer	488	491
	Section	-	736
	Bundle	2,930	2,944

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	✓	-
Limestone	SR.n/a SRI n/a	-	✓
Sandstone	SR.n/a SRI n/a	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓



GRANITE



LIMESTONE



SANDSTONE



SIERRA

Single Units



TAPERED

229 x 100 x 200mm
9 x 3 7/8 x 7 7/8"
144 units/Bundle
.25 Fc.Ft./Stone




STANDARD

300 x 100 x 200mm
11 7/8 x 3 7/8 x 7 7/8"
96 units/Bundle
.33 Fc.Ft./Stone

Notes: **SMALL TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY.** Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. LedgeStone™, Brussels Block® XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TIE-BACK	1/2 COPING	CORNER 45°
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 MM	300 MM	300 MM

FCFT PER	Bundle	2.00	3.00	7.04
	Layer	2.00	3.00	7.04
	Stone	2.00	3.00	7.04

PER BUNDLE	Layers	1.00	1.00	1.00
	Sections	-	-	-

LNFT PER	Bundle	-	3.00	-
	Unit	-	3.00	-

UNITS PER	SqFt	0.50	0.33	0.14
	Sections	-	-	-
	Bundle	1.00	1.00	1.00

LBS PER	Layer	1,660	800	1,480
	Sections	-	-	-
	Bundle	1,660	800	1,480

COLORS	Reflectance	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO



NATURAL

Single Units		TIE-BACK 1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 2.00 Fc.Ft./Stone		1/2 COPING 915 x 300 x 600mm 36 x 11 7/8 x 23 5/8" 1 unit/Bundle 3.00 Fc.Ft./Stone		CORNER 45° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone
--------------	---	--	---	---	---	--

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		CORNER	COPING TAPERED
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	31.25	20.83	18.74
	Layer	6.25	4.17	2.34
	Stone	-	0.52	0.26

PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	4.00	4.00	3.00

LNFT PER	Bundle	62.30	41.60	66.00
	Unit	1.04	1.04	0.92

UNITS PER	SqFt	-	1.92	3.84
	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00

LBS PER	Layer	608	453	299
	Section	760	566	797
	Bundle	3,040	2,264	2,392

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



GRANITE



RIVER



SANDSTONE



SIERRA

Random Bundle				Single Units		
		LARGE TAPERED 380 x 150 x 230mm 15 x 5 7/8 x 9" 20 units/Bundle .63 Fc.Ft./Stone	MEDIUM TAPERED 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 20 units/Bundle .52 Fc.Ft./Stone		SMALL TAPERED 250 x 150 x 230mm 9 7/8 x 5 7/8 x 9" 20 units/Bundle .42 Fc.Ft./Stone	

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. **Quarry tubing is only added to orders if requested.** LedgeStone™, Olde Quarry™ coping, Brussels Block® XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		PILLAR UNIT
Bundle Type	RANDOM	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	31.91	29.97
	Layer	10.64	9.99
	Stone	-	0.33



PER BUNDLE	Layers	3.00	3.00
	Sections	-	3.00

LNFT PER	Bundle	94.46	-
	Unit	1.50	-

UNITS PER	SqFt	-	3.00
	Section	-	30.00
	Bundle	63.00	90.00

LBS PER	Layer	948	890
	Section	-	890
	Bundle	2,845	2,670

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓
Graphite	SR.n/a SRI n/a	✓	✓
River	SR.n/a SRI n/a	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓

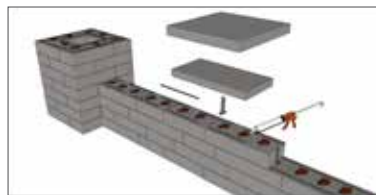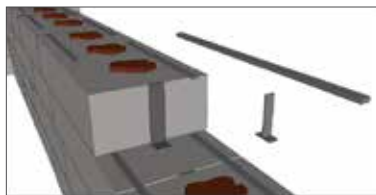

Lineo spacers are used to provide shadow effect during installation and are provided with your Lineo product.
1 Package = 144 Spacers / 68 T's



GRANITE



GRAPHITE



RIVER



SIERRA

Random Bundle	XL RECTANGLE	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	Single Unit	PILLAR UNIT
	600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 18 units/Bundle .33 Fc.Ft./Stone	500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle .33 Fc.Ft./Stone	400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle .55 Fc.Ft./Stone	300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle .44 Fc.Ft./Stone		300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 90 units/Bundle .33 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced on a required, refundable skid. Lineo spacers are shipped with random wall bundles to create even spacing between units. LedgeStone™, Unilock Natural Stone or 6" x 12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split

TECHNOLOGIES

REALA™

Cast from natural stone wall

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER / PILLAR
Bundle Type	RANDOM	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	102 MM	102 MM

FCFT PER	Bundle	11.07	12.95
	Layer	2.214	2.59
	Stone	-	-

PER BUNDLE	Layers	5.00	5.00
	Sections	-	-

LNFT PER	Bundle	33.00	-
	Unit	-	-

UNITS PER	SqFt	-	-
	Section	-	-
	Bundle	25.00	20.00

LBS PER	Layer	242.31	173.4
	Section	-	-
	Bundle	1,211.05	867.01

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓



BUFF



COASTAL SLATE

Random Bundle	LARGE WEDGE	MEDIUM WEDGE	SMALL WEDGE	Corner / Pillar Bundle	CORNER/PILLAR UNIT
	26.96 (23.97) x 4 x 9" 685 (609) x 102 x 229mm 5 units/Bundle .71 Fc.Ft./Stone	18.97 (15.98) x 4 x 9" 482 (406) x 102 x 229mm 10 Units/ Bundle .48 Fc.Ft./Stone	10.98 (8.0) x 4 x 9" 279 (203) x 102 x 229mm 10 Units/ Bundle .26 Fc.Ft./Stone		14.96 (13.46) x 4 x 9" 380 (342) x 102 x 229mm 20 Units/ Bundle .647 Fc.Ft./Stone <i>(10 rights + 10 lefts per bundle)</i>

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. While coping is optional with Mackinaw wall, if you are looking for coping, Ledgestone™ or Unilock Natural Stone complement it well. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER	COPING
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	WISCONSIN	CHICAGO	CHICAGO
Thickness (mm)	114 MM	114 MM	75 MM

FCFT PER	Bundle	33.75	30.89	24.00
	Layer	5.63	6.18	3.00
	Stone	-	-	-

PER BUNDLE	Layers	6.00	5.00	8.00
	Sections	5.00	4.00	4.00

LNFT PER	Bundle	90.00	82.40	96.00
	Unit	-	-	-

UNITS PER	SqFt	-	2.59	4.00
	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00

LBS PER	Layer	521	630	380
	Section	625	788	760
	Bundle	3,125	3,150	3,039

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



GRANITE



RIVER



SANDSTONE



SIERRA

Random Bundle	15" LARGE TAPERED	12" MEDIUM TAPERED	9" SMALL TAPERED	Single Units	CORNER	COPING TAPERED
	380 x 114 x 230mm 15 x 4 1/2 x 9" 30 units/Bundle .47 Fc.Ft./Stone	305 x 114 x 230mm 12 x 4 1/2 x 9" 30 units/Bundle .38 Fc.Ft./Stone	230 x 114 x 230mm 9 x 4 1/2 x 9" 30 units/Bundle .28 Fc.Ft./Stone		300 x 114 x 230mm 11 7/8 x 4 1/2 x 9" 80 units/Bundle .39 Fc.Ft./Stone	305 x 75 x 305mm 12 x 3 x 12" 96 units/Bundle .25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. Quarry Coping sold and produced on a returnable, refundable pallet. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** LedgeStone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	WISCONSIN	WISCONSIN
Thickness (mm)	114 MM	114 MM

FCFT PER	Bundle	33.75	18.24
	Layer	5.63	6.08
	Stone	-	0.38

PER BUNDLE	Layers	6.00	3.00
	Sections	-	-

LNFT PER	Bundle	-	18.24
	Unit	-	0.38

UNITS PER	SqFt	-	2.65
	Section	-	-
	Layer	15.00	16.00
	Bundle	90.00	48.00

LBS PER	Layer	498	641
	Section	-	-
	Bundle	2,988	1,922


COLORS	Reflectance	Stock	Stock
Midnight Charcoal	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓
Natural Grey	SR.n/a SRI n/a	✓	✓



MIDNIGHT CHARCOAL



SANDSTONE



NATURAL GREY

Random Bundle		15" LARGE TAPERED 380 x 114 x 230mm 15 x 4 1/2 x 9" 30 units/Bundle .33 Fc.Ft./Stone		12" MEDIUM TAPERED 305 x 114 x 230mm 12 x 4 1/2 x 9" 30 units/Bundle .33 Fc.Ft./Stone		9" SMALL TAPERED 230 x 114 x 230mm 9 x 4 1/2 x 9" 30 units/Bundle .55 Fc.Ft./Stone	Single Unit		CORNER 306.6 x 114 x 228.6mm 12 x 4 1/2 x 9" 48 units/Bundle .38Fc.Ft./Stone
---------------	---	---	---	--	---	---	-------------	---	---

Notes: **SOLD IN FULL BUNDLES ONLY.** Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** Ledgestone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	CORNER	XL UNIT	COPING
Bundle Type	DOUBLE	SINGLE	DOUBLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	30.01	26.66	20.34
	Layer	10.00	5.33	2.91
	Stone	1.67	1.50	0.48

PER BUNDLE	Layers	3.00	5.00	7.00
	Sections	6.00	-	2.00

LNFT PER	Bundle	-	53.34	82.95
	Unit	-	1.33	1.97

UNITS PER	SqFt	0.60	-	2.06
	Section	3.00	-	21.00
	Bundle	18.00	40.00	42.00

LBS PER	Layer	547	618	411
	Section	274	-	1,437
	Bundle	1,641	3,091	2,875

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
Nevada	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



GRANITE



NEVADA



SIERRA

Sold Individually



CORNER
200 x 150 x 300mm
7 7/8 x 5 7/8 x 11 7/8"
18 Double units/Bundle
36 Single units/Bundle
1.67 Fc.Ft./Double Unit



XL TAPERED UNIT
400 x 150 x 300mm
15 3/4 x 5 7/8 x 11 7/8"
32 Single units/Bundle
.67 Fc.Ft./Stone



COPING
300 x 75 x 300mm
11 7/8 x 3 x 11 7/8"
42 Double units/Bundle
.48 Fc.Ft./Stone

Notes: **XL UNITS ARE SOLD IN FULL BUNDLES ONLY.** Corner and XL Units are produced and sold on a required, refundable skid. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Coping bundles are Double units, packaged with 16 closed end pieces per bundle. (8 Left & 8 Right). 12" Closed End Coping pieces are not sold separately. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor web site under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	XL CORNER	XL TAPERED	COPING & CLOSED-END / COPING
Bundle Type	SINGLE	SINGLE	BUNDLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	58.15	25.84	15.50
	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32

PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	-	-	3.00

LNFT PER	Bundle	-	-	62.99
	Unit	-	-	1.31

UNITS PER	SqFt	1.03	1.55	3.10
	Section	-	-	16.00
	Bundle	60.00	40.00	48.00

LBS PER	Layer	719	627	285
	Section	-	-	761
	Bundle	3,593	3,135	2,282


COLORS	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓	✓
Granite	SR n/a SRI n/a	✓	✓	✓
Midnight Charcoal	SR n/a SRI n/a	✓	✓	✓
Natural Grey	SR n/a SRI n/a	-	-	✓
Sandstone	SR n/a SRI n/a	-	-	✓



FIELDSTONE



GRANITE




MIDNIGHT CHARCOAL



NATURAL GREY



SANDSTONE

Sold Individually		XL CORNER 400 x 150 x 200mm 15 3/4 x 5 7/8 x 7 7/8" 60 units/Bundle 0.97 Fc.Ft./Stone	2 Unit Bundle		XL TAPERED 400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 1/8" 40 units/Bundle 0.65 Fc.Ft./Stone		COPING 400 x 75 x 300mm 15 3/4 x 3 x 11 1/8" 24 units/Bundle 0.32 Fc.Ft./Stone		CLOSED-END / COPING 400 x 75 x 300mm 15 3/4 x 3 x 11 1/8" 24 units/Bundle 0.32 Fc.Ft./Stone
-------------------	---	--	---------------	---	--	---	---	---	--

Notes: **XL CORNER AND TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID.** Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	WALL	CORNER
Bundle Type	RANDOM	RANDOM
Plant Produced	AYR	AYR
Thickness (mm)	57 MM	57 MM

FCFT PER	Bundle	24.30	16.21
	Layer	3.04	4.05
	Stone	-	-

PER BUNDLE	Layers	8.00	4.00
	Sections	-	-

LNFT PER	Bundle	130.69	-
	Unit	-	-

UNITS PER	SqFt	-	2.47
	Section	-	-
	Bundle	128.00	40.00

LBS PER	Layer	249	293
	Section	-	-
	Bundle	1,990	1,173






COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓



BUFF



COASTAL SLATE

Corner Bundle		LONG CORNER UNIT 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm 20 units/Bundle		SHORT CORNER UNIT 14½ x 9-10 x 2¼" 375 x 230-250 x 57mm 20 units/Bundle
	Random Bundle		STANDARD UNIT 1 8 x 9-10 x 2¼" 200 x 230-250 x 57mm 32 units/Bundle	
		STANDARD UNIT 3 12 x 9-10 x 2¼" 300 x 230-250 x 57mm 32 units/Bundle		STANDARD UNIT 4 17 x 9-10 x 2¼" 425 x 230-250 x 57mm 32 units/Bundle

Notes: RIVERCREST UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD	COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	180 MM	180 MM

FCFT PER	Bundle	20.88	20.88
	Layer	6.96	6.96
	Stone	1.74	1.74

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	35.43	35.43
	Unit	2.45	2.45

UNITS PER	SqFt	0.57	0.57
	Section	-	-
	Bundle	12.00	12.00

LBS PER	Layer	898	901
	Section	-	-
	Bundle	2,695	2,702

COLORS	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓
Granite	SR n/a SRI n/a	✓	✓
Midnight Charcoal	SR n/a SRI n/a	✓	✓



FIELDSTONE



GRANITE



MIDNIGHT CHARCOAL

Single Units



STANDARD
900 x 180 x 290mm
35 1/2 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone



COPING
900 x 180 x 290mm
35 1/2 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



	CORNER 90	CORNER 45	STANDARD	STANDARD 925	COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM

FCFT PER	Bundle	17.19	13.50	12.00	6.00	12.00
	Layer	5.73	4.50	4.00	2.00	4.00
	Stone	2.87	2.25	2.00	2.00	2.00

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	-	-	6.00

LNFT PER	Bundle	-	-	19.50	9.75	19.50
	Unit	-	-	3.25	3.25	3.25

UNITS PER	SqFt	0.35	0.44	0.50	0.50	0.50
	Section	-	-	-	-	1.00
	Bundle	6.00	6.00	6.00	3.00	6.00

LBS PER	Layer	954	790	926	872	919
	Section	-	-	-	-	459
	Bundle	2,862	2,370	2,778	2,617	2,756

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	-	-	-	-	✓
Nevada	SR n/a SRI n/a	SO	SO	SO	SO	✓
Sierra	SR n/a SRI n/a	SO	SO	SO	SO	✓

APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits








GRANITE



NEVADA



SIERRA

Single Units					
	CORNER 90°	CORNER 45°	STANDARD	STANDARD 925	COPING
	925 x 185 x 500mm	925 x 185 x 500mm	1000 x 185 x 500mm	1000 x 185 x 925mm	1000 x 185 x 500mm
	36 1/2 x 7 3/8 x 19 3/4"	36 1/2 x 7 3/8 x 19 3/4"	39 3/8 x 7 3/8 x 19 3/4"	39 3/8 x 7 3/8 x 36 1/2"	39 3/8 x 7 3/8 x 19 3/4"
	6 units/Bundle	6 units/Bundle	6 units/Bundle	3 units/Bundle	6 units/Bundle
	2.87 Fc.Ft./Stone	2.25 Fc.Ft./Stone	2.00 Fc.Ft./Stone	2.00 Fc.Ft./Stone	2.00 Fc.Ft./Stone

Notes: For Special Order units - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Coping units can be sold individually to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

TECHNOLOGIES

CLASSIC™
 Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits



DUSK

	48" STEP
Bundle Type	SINGLE
Plant Produced	GORMLEY
Thickness (mm)	180 MM

FCFT PER	Bundle	13.95
	Layer	4.65
	Stone	2.33

PER BUNDLE	Layers	3.00
	Sections	-

LNFT PER	Bundle	24.00
	Unit	4.00

UNITS PER	SqFt	0.43
	Section	-
	Bundle	6.00

LBS PER	Layer	1,081
	Section	-
	Bundle	3,242

COLORS	Reflectance	Stock
Dusk	SR.n/a SRI n/a	✓

Single Unit




48" STEP
 1200 x 180 x 500mm
 47 1/4 x 7 x 19 3/4"
 6 units/Bundle
 2.33 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Multiple (see below)

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color


COLORFUSION™ (UMBRIANO®)
Subtly mottled colored finish

TECHNICAL INFORMATION


Conforms to ASTM C 1372
Eligible for LEED v4.1 credits



Download the U-Cara Modular
Fireplace Installation Guide.

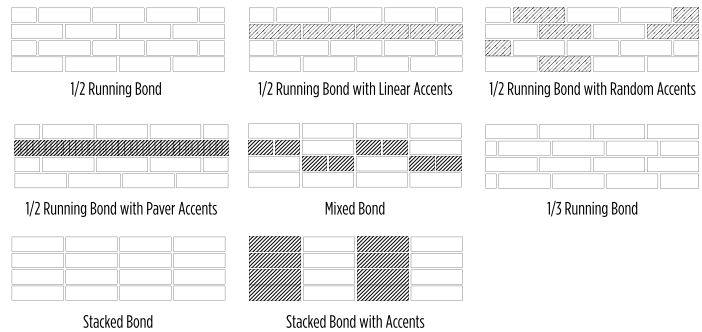

Pitched Finish



Smooth Finish



Umbriano Finish



Series Finish



Lavano



Subway



U-Cara® Multi-Face Wall System

Fascia Panels	STANDARD SMOOTH	CLOSED-END SMOOTH	STANDARD UMBRIANO	CLOSED-END UMBRIANO	3" SERIES	STANDARD PITCHED	CLOSED-END PITCHED
Bundle Type	SINGLE	MULTI	SINGLE	MULTI	SINGLE	SINGLE	MULTI
Plant Produced	CHICAGO	CHICAGO	GEORGETOWN	GEORGETOWN	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	150 MM	150 MM	71 MM	150 MM	150 MM

FCFT PER	Bundle	61.52	54.18	61.52	54.18	59.32	61.52	54.18
	Crate	-	-	-	-	-	-	-
	Sections	10.25	9.03	10.25	9.03	9.89	10.25	9.03
	Stone	0.73	1.29	0.73	1.29	0.18	0.73	1.29

PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00
	Sections	-	-	-	-	-	-	-

LNFT PER	Bundle	129.50	104.86	129.50	107.94	-	129.50	107.94
	Unit	1.54	2.50	1.54	2.57	-	1.54	2.57

UNITS PER	SqFt	1.37	0.78	1.37	0.78	5.66	1.37	0.78
	Sections	-	-	-	-	-	-	-
	Crate	-	-	-	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00	336.00	84.00	42.00

LBS PER	Layer	275	207	344	207	250	317	236
	Sections	-	-	-	-	-	-	-
	Crate	-	-	-	-	-	-	-
	Bundle	1,648	1,241	2,067	1,240	1,501	1,904	1,416

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Bavarian	n/a	✓	✓	-	-	-	✓	✓	
Champagne	n/a	✓	✓	-	-	-	-	-	
Dark Charcoal	n/a	✓	✓	-	-	-	-	-	
Fossil	n/a	-	-	-	-	-	✓	✓	
French Grey	n/a	-	-	✓	✓	-	-	-	
Granite Fusion	n/a	✓	✓	-	-	-	✓	✓	
Onyx Black	n/a	-	-	-	-	✓	-	-	
Opal Blend	n/a	✓	✓	-	-	-	-	-	
Summer Wheat	n/a	-	-	✓	✓	-	-	-	

FASCIA PANELS STYLES



6" STANDARD
5 7/8 x 18 3/8 x 2 3/8"
150 x 466 x 60mm
84 units/Bundle
.73 Fc.Ft./Stone



6" PITCHED
5 7/8 x 18 3/8 x 2 3/4"
150 x 466 x 70mm
84 units/Bundle
.73 Fc.Ft./Stone



Available in Onyx Black only
3" SERIES PANEL
2 7/8 x 9 x 2 3/8"
71 x 231 x 60mm
336 units/Bundle
.18 Fc.Ft./Stone

FASCIA PANELS FINISHES




SMOOTH



PITCHED




UMBRIANO®




SERIES

2 UNIT STANDARD CLOSE-END BUNDLE




CLOSED-END FASCIA PANEL
5 7/8 x 21 x 2 3/8"
150 x 530 x 60mm
42 units/Bundle
1.29 Fc.Ft./Stone
24 Rights & 18 Lefts




STANDARD FASCIA HALF PANEL
6 x 9 1/4 x 2 3/8"
150 x 233 x 60mm
42 units/Bundle
1.29 Fc.Ft./Stone

2 UNIT PITCHED CLOSE-END BUNDLE



CLOSED-END PITCHED PANEL
5 7/8 x 20 7/8 x 2 3/4"
150 x 530 x 70mm
42 units/Bundle
1.29 Fc.Ft./Stone
24 Rights & 18 Lefts



PITCHED FASCIA HALF PANEL
6 x 9 1/4 x 2 3/8"
150 x 233 x 70mm
42 units/Bundle
1.29 Fc.Ft./Stone
24 Rights & 18 Lefts

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System



	LAVANO STANDARD	SUBWAY STANDARD	CLOSED END
Bundle Type	SINGLE	SINGLE	BUNDLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	150 MM

FCFT PER	Bundle	61.52	61.52	54.18
	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29

PER BUNDLE	Layers	6.00	6.00	6.00
	Sections	-	-	-


LNFT PER	Bundle	129.50	129.50	104.86
	Unit	1.54	1.54	2.50

UNITS PER	SqFt	1.37	1.37	0.78
	Section	-	-	-
	Bundle	84.00	84.00	42.00

LBS PER	Layer	275.00	285.00	207.00
	Section	-	-	-
	Bundle	1,648	1,709	1,240

COLORS	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	✓	✓
Fossil	SR n/a SRI n/a	✓	-	✓
Granite Fusion	SR n/a SRI n/a	✓	-	✓
Ivory	SR n/a SRI n/a	-	✓	✓
Opal	SR n/a SRI n/a	-	✓	✓

APPLICATIONS



CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE


Edge Detail - n/a
Surface Texture - Smooth (Subway)
Textured (Lavano)

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

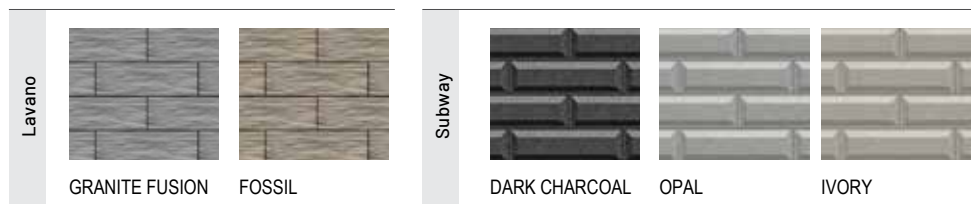


Single Unit		LAVANO STANDARD FASCIA PANEL 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone	Closed-End Bundle		LAVANO HALF FASCIA PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm		LAVANO CLOSED-END FASCIA PANEL 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm
		SUBWAY STANDARD FASCIA PANEL 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone			SUBWAY HALF FASCIA PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm		SUBWAY CLOSED-END FASCIA PANEL 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm

Notes: Sold in full bundles. Produced and sold on a required refundable skids.


U-Cara® Multi-Face Wall System



U-CARA RETAINING WALL GEOGRID SECTION

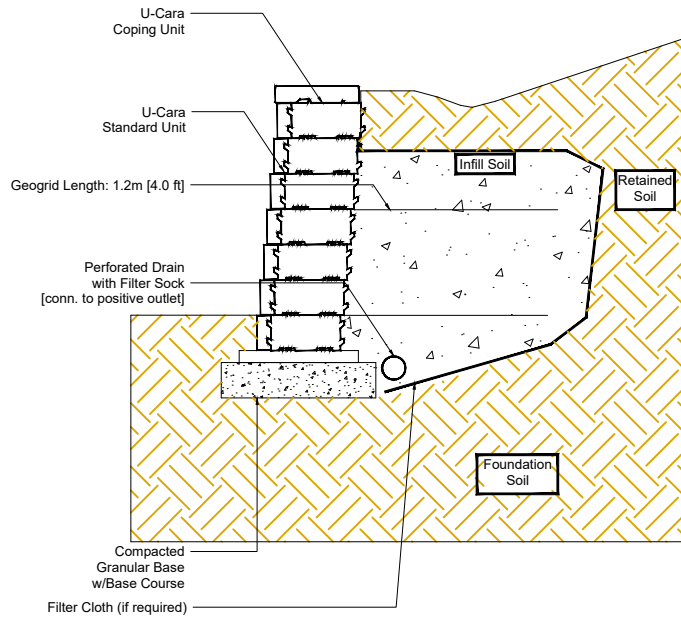

APPLICATIONS



ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™ (UMBRIANO)

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth,

Standard, Series Exposed,

Umbriano® Mottled, Pitched &


Flamed

U-CARA®

CROSS SECTION

REF: Detail_U-Cara_Garden_Wall

Garden Wall - Max Height 15'

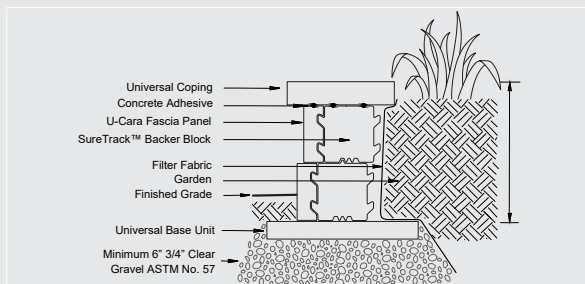


Notes: This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA®

CROSS SECTION

REF: Detail_U-Cara_Seal_Wall

Seal Wall - Max Height 21'

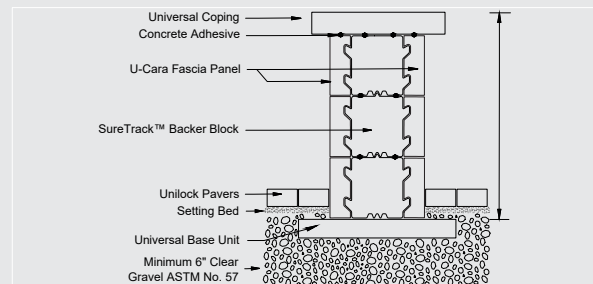

Notes: This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-Cara® Multi-Face Wall System

Sure Track Components



CORNER BACKER
5 7/8" x 6 7/8" x 11 5/8"
150 x 175 x 294mm
56 units/Bundle



LARGE BACKER
5 7/8" x 7 7/8" x 11 5/8"
150 x 200 x 294mm
63 units/Bundle



STANDARD BACKER
5 7/8" x 7 7/8" x 5 7/8"
150 x 200 x 150mm
105 units/Bundle

	LARGE/CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	150 MM	150 MM

FCFT PER	Bundle	15.82	20.35	33.91
	Layer	3.96	6.78	11.30
	Stone	0.28	0.32	0.32

PER BUNDLE	Layers	4.00	3.00	3.00
	Sections	-	-	-

LNFT PER	Bundle	-	41.34	69.99
	Unit	-	0.66	0.67

UNITS PER	SqFt	3.54	3.10	3.10
	Sections	-	-	-
	Bundle	56.00	63.00	105.00

LBS PER	Layer	521	922	819
	Sections	-	-	-
	Bundle	2,085	2,766	2,458

Smooth Panel



BAVARIAN



CHAMPAGNE



DARK CHARCOAL



GRANITE FUSION



OPAL BLEND

Series 3" Panel



ONYX BLACK

Pitched Panel



BAVARIAN



GRANITE FUSION



FOSSIL

Umbriano® Panel



FRENCH GREY



SUMMER WHEAT

Recommended Base Unit



UNIVERSAL U-GRIP™ BASE
14 x 19 x 2 1/4"
355 x 482 x 55mm

See page 79 for more information

Extra Components



SURE TRACK CORNER INSERT
L = 2"
50mm
40 Inserts per bag
RS:ACC 245


Sold in full bags only

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

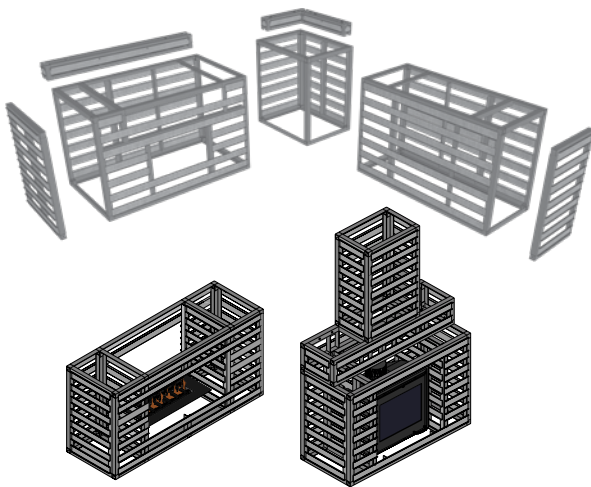

NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8" RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000005	UL-HCK	HEIGHT CONVERSION KIT
UCARA000006	UL-HCK-OS	HEIGHT CONVERSION KIT OVERSIZED
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000014	UL-HCK-CC-OS	HEIGHT CONVERSION CORNER CABINET OVERSIZED
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36"-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL / BASE UNIT 64 1/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18 3/8" x 18 3/8")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS



Download the U-Cara Modular Fireplace Installation Guide.

U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR
RS-UCARA000002
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS
RS-UCARA000001
8' LENGTH - SOLD IN PACKS OF 10 PIECES



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Exposed
 Joint Spacing - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	COPING	PILLAR CAP 28"
Bundle Type	SINGLE	SINGLE
Plant Produced		
Thickness (mm)	60 MM	76 MM

SQFT PER	Bundle	-	-
	Unit	-	-

FCFT PER	Bundle	-	-
	Layer	-	-
	Unit	-	-

LNFT PER	Bundle	42.00	-
	Unit	2.00	-

UNITS PER	Bundle	21.00	6.00
	SqFt	-	-

LBS PER	Unit	68	183
	Bundle	1,428	1,098

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



BUFF



CHARCOAL

Single Unit



COPING
 609 x 60mm x 355mm
 24 x 2 3/8 x 14"
 21 units/Bundle



PILLAR CAP
 711 x 76mm x 711mm
 28 x 3 x 28"
 6 units/Bundle

Note: this unit is tapered at the top

Notes: **SOLD IN FULL PALLETS ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Weathered
 Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

		BRUSSELS FULLNOSE
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	10.00
	Sections	4.00

LNFT PER	Bundle	120.00
	Unit	0.50

UNITS PER	SqFt	-
	Section	60.00
	Bundle	240.00

LBS PER	Layer	316
	Section	790
	Bundle	3,160

COLORS	Reflectance	Stock
Midnight Charcoal	SR. .12 SRI 9	✓
Sandstone	SR. .41 SRI 46	✓
Sierra	SR. n/a SRI n/a	✓



MIDNIGHT CHARCOAL



SANDSTONE



SIERRA

Single Unit




BRUSSELS FULLNOSE

152.4 x 304.8 x 60mm
 6 x 12 x 2 3/8"
 240 units/Bundle

Notes: Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™
 Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	6 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	4.00
	Sections	-

LNFT PER	Bundle	104.00
	Unit	0.50

UNITS PER	SqFt	-
	Section	-
	Bundle	208.00

LBS PER	Layer	698
	Section	-
	Bundle	2,791

COLORS	Reflectance	Stock
Midnight Charcoal	SR. n/a SRI n/a	✓
Sandstone	SR. n/a SRI n/a	✓
Sierra	SR. n/a SRI n/a	✓



MIDNIGHT CHARCOAL



SANDSTONE



SIERRA

Single Unit



6 X 12 FULLNOSE
 150 x 300 x 60mm
 5 7/8 x 11 7/8 x 2 3/8"
 208 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Ledgestone™ Fullnose, Coping & Closed-End Coping



	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57

PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	56	193	199	282	279
	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	n/a	✓	✓	✓	✓	✓
Grey	n/a	✓	✓	✓	✓	✓

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™
Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits



BUFF



GREY

Single Units	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END COPING	LARGE COPING	LARGE CLOSED-END COPING
	610 x 305 x 60mm 24 x 12 x 2 3/8" 13 units/Bundle .39 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/4" 12 units/Bundle .46 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/4" 12 units/Bundle .46 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 units/Bundle .57 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 units/Bundle .57 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	30" STEP TREAD	48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21 1/2" FIRE PIT COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	70 MM	150 MM	150 MM	100 MM	100 MM	65 MM

FCFT PER	Bundle	6.87	5.91	8.86	3.28	-	-
	Layer	1.72	1.97	2.95	0.66	-	-
	Stone	0.57	1.97	2.95	0.66	-	-

PER BUNDLE	Layers	4.00	3.00	3.00	5.00	5.00	6.00
	Sections	-	-	-	-	-	-

LNFT PER	Bundle	30.00	12.00	18.00	10.04	-	-
	Unit	2.50	4.00	6.00	2.01	-	-

UNITS PER	SqFt	1.75	0.51	0.34	1.52	-	-
	Section	-	-	-	-	-	-
	Bundle	12.00	3.00	3.00	5.00	5.00	24.00

LBS PER	Layer	262	556	813	159	206	338
	Section	-	-	-	-	-	-
	Bundle	1,049	1,669	2,439	795	1,030	1,688

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Buff	n/a	✓	✓	✓	✓	✓	✓
Grey	n/a	✓	✓	✓	✓	✓	✓

Single Unit

FIRE PIT COPING
254 x 546 x 65mm
10 x 21 1/2 x 2 5/8"
24 units/Bundle

BUFF GREY

Single Units

30" STEP TREAD
762 x 343 x 70mm
30 x 13 x 2 3/4"
12 units/Bundle
.57 Fc.Ft./Stone

48" STEP
1220 x 610 x 150mm
48 x 24 x 5 7/8"
3 units/Bundle
1.97 Fc.Ft./Stone

72" STEP
1830 x 610 x 150mm
72 x 24 x 5 7/8"
3 units/Bundle
2.95 Fc.Ft./Stone

24" PILLAR CAP
610 x 610 x 100mm
24 x 24 x 3 7/8"
5 units/Bundle
.66 Fc.Ft./Stone

29" PILLAR CAP
740 x 740 x 100mm
29 1/8 x 29 1/8 x 3 7/8"
5 units/Bundle
.66 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfered or Rounded
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR[™]

Refined surface and long-lasting color

EASYCLEAN[™]

Factory sealed to provide integral stain resistance

COLORFUSION[™]

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

	COPING CHAMFERED	COPING FULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	60 MM	60 MM

FCFT PER	Bundle	-	-
	Layer	-	-
	Stone	-	-

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

LNFT PER	Unit	1.97	1.97
	Bundle	78.74	78.74

UNITS PER	SqFt	-	-
	Section	-	-
	Bundle	40.00	40.00

LBS PER	Layer	252	252
	Section	-	-
	Bundle	2,517	2,517

COLORS	Reflectance	Stock	Stock
French Grey	SR. .17 SRI 15	✓	✓
Midnight Sky	SR. .17 SRI 15	✓	✓
Summer Wheat	SR. .42 SRI 48	✓	✓
Winter Marvel	SR. .17 SRI 15	✓	✓

Single Unit



COPING CHAMFERED
 360 x 600 x 60mm
 14 x 24 x 2 3/8"
 40 units/Bundle



COPING FULLNOSE
 360 x 600 x 60mm
 14 x 24 x 2 3/8"
 40 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™
Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	55 MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	9.00
	Sections	-

LNFT PER	Bundle	85.50
	Unit	1.58

UNITS PER	SqFt	-
	Section	-
	Bundle	54.00

LBS PER	Layer	280
	Section	-
	Bundle	2,524

COLORS	Reflectance	Stock
Natural	SR.n/a SRI n/a	✓



NATURAL

Single Units

UNIVERSAL U-GRIP BASE
482 x 55 x 355mm
19 x 2 ¼ x 14"
54 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on a required, refundable skid. Coping bundle includes 2 End units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.



	SQUARE W/GRILL	SQUARE UNIT	ROUND W/GRILL	ROUND UNIT
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	300 MM	300 MM	300 MM	300 MM

DIAMETER (inch)	Outside	56.00	56.00	52.00	52.00
	Inside	40.00	40.00	36.00	36.00
	Insert	38.00	38.00	34.00	34.00

LAYER PER UNIT	3.00	3.00	3.00	3.00
UNIT PER LAYER	16.00	16.00	18.00	18.00
UNIT PER PALLET	48.00	48.00	54.00	54.00

LBS PER PALLET	1,545	1,525	1,145	1,125
-----------------------	-------	-------	-------	-------

COLORS	Reflectance	Stock	Stock	Stock	Stock
Granite	SR. n/a SRI n/a	-	-	✓	✓
Sandstone	SR. n/a SRI n/a	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Standard
 Joint Spacing - n/a
 Void % - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits

SUNSET FIRE PIT KIT	Square	Round
Granite	-	RS-CON082
Granite w/Grill	-	RS-CON083
Sandstone	RS-CON037	RS-CON031
Sandstone w/ Grill	RS-CON040	RS-CON034
Sierra	RS-CON036	RS-CON030
Sierra w/ Grill	RS-CON039	RS-CON033



GRANITE



SANDSTONE



SIERRA

Single Unit



SUNSET ROUND W/GRILL
 1300 x 1300 x 300mm
 51 ¼ x 51 ¼ x 11 7/8"



SUNSET SQUARE W/GRILL
 1400 x 1400 x 300mm
 55 x 55 x 11 7/8"



SUNSET ROUND UNIT
 1300 x 1300 x 300mm
 51 ¼ x 51 ¼ x 11 7/8"



SUNSET SQUARE UNIT
 1400 x 1400 x 300mm
 55 x 55 x 11 7/8"

Notes: All measurements are nominal. Contact Unilock for more information.

Unilock Elements

Tuscany Collection



TUSCANY FIREPLACE
Sandstone with Copthorne® (3 Color Blend)



TUSCANY FIREPLACE
Sierra with Copthorne® (3 Color Blend)

ELEMENT PRODUCT CODES

<u>Tuscany Collection</u>	Sandstone	Sierra
Fireplace Top	RS-ELE074-1	RS-ELE095-2
Fireplace Bottom	RS-ELE088-1	RS-ELE096-2
Wood box Set	RS-ELE028-1	RS-ELE027-1
Arched Hearth	RS-ELE016-1	RS-ELE017-1

WEIGHTS

<u>Tuscany Collection</u>
Fireplace Top – 2925 lbs
Fireplace Bottom – 4225 lbs
Wood Boxes – 4005 lbs
Arched Hearth – 1170 lbs

Barcelona Collection



BARCELONA FIREPLACE
Sierra with Umbriano® (Summer Wheat)

ELEMENT PRODUCT CODES


<u>Barcelona Collection</u>	Sierra
Fireplace	RS-ELE214
Wood box Set	RS-ELE213
Arched Hearth	RS-ELE212

WEIGHTS:



<u>Barcelona Collection</u>
Fireplace Top – 2725 lbs
Fireplace Bottom – 4170 lbs
Wood Boxes – 4200 lbs
Arched Hearth – 1200 lbs

Unilock Elements

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

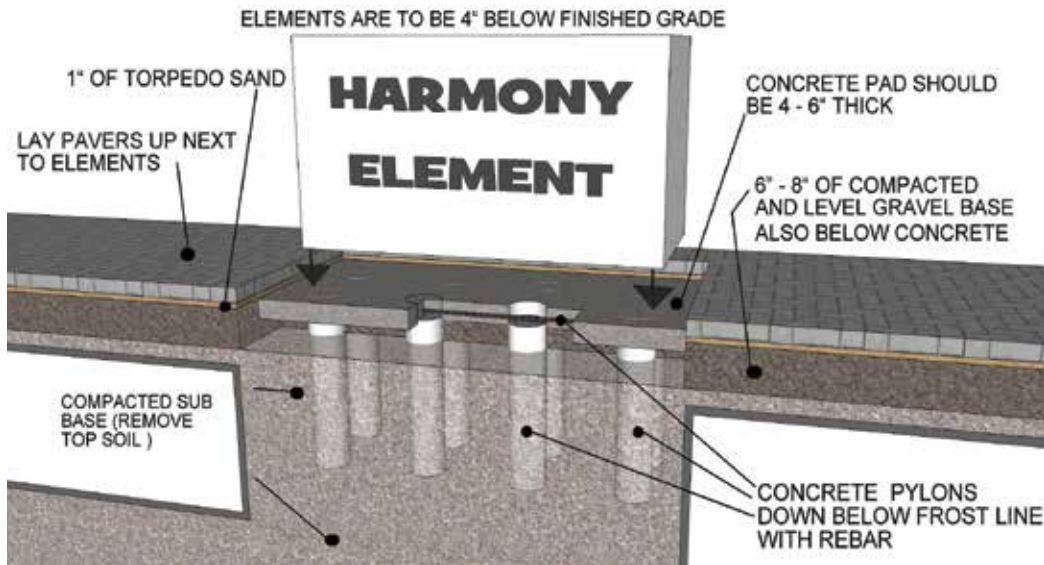

TUSCANY & BARCELONA FIREPLACE

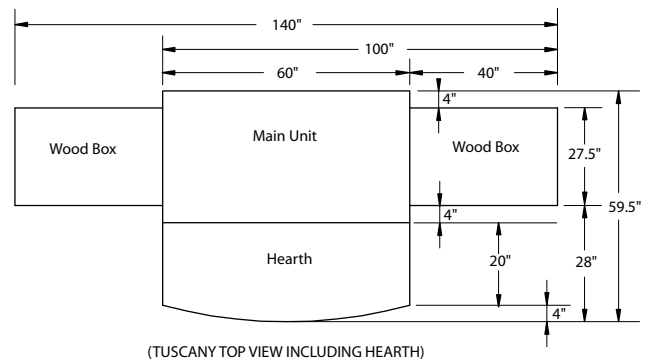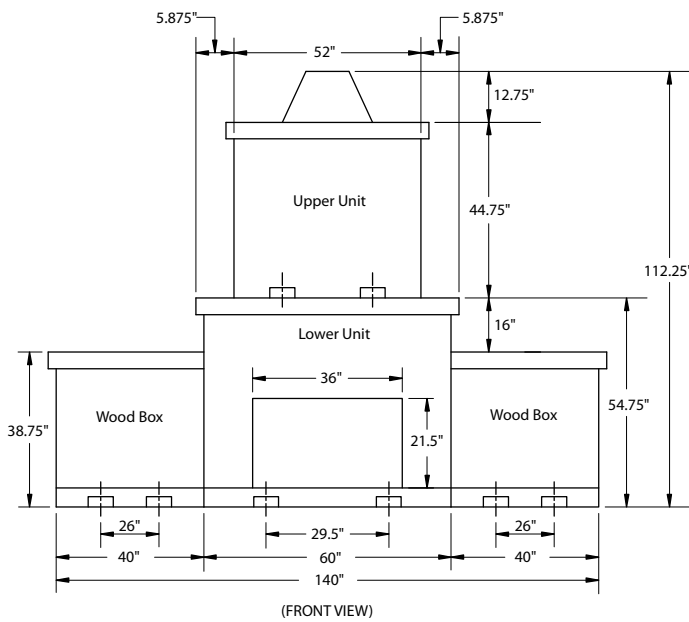

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL-approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Cleaning Products



- PROFESSIONAL GRADE OIL & GREASE REMOVER**
RS-CLN001 1 quart; 6/case; 100 cases/skid (600 ea)
- Removes penetrated petroleum-based stains.
 - Clean-dries from a liquid to a powder.



- PAINT, TAR & RUBBER REMOVER**
RS-CLN007 1 quart; 6/case; 120 cases/skid (720 ea)
- Effectively dissolves paint, tar, rubber or chewing gum.
 - Water-rinsable stones, concrete, and masonry.



- PAVER RESTORER**
RS-CLN044 1 gallon; 4/case; 36 cases/skid (144 ea)
- Eco-friendly cleaner removes slurry and polymeric haze.
 - Cleans up to 200 sq. ft./gallon.



- SUREBOND SURECLEAN**
RS-CLN014 1 Gallon; 4/case; 36 cases/skid
(27 cases/truckload - HAZMAT)
RS-CLN063 5 Gallon (SPECIAL ORDER) 36 ea./skid
(25 ea./truckload - HAZMAT)
- Environmentally friendly, non-acid, super concentrated cleaner.
 - Dislodges dirt, grime, tire scuffing and environmental soiling.
 - Cleans up to 250 sq. ft./gallon.
 - 1,000 lbs. HAZMAT weight restriction applies with this product.



- SUREBOND EFFLO OFF**
RS-CLN062 1 gallon; 4/case; 36 cases/skid
(27 cases/truckload - HAZMAT)
RS-CLN067 5 gallons (SPECIAL ORDER)
(25 ea/truckload - HAZMAT)
- Heavy-duty, non-acid concentrated cleaner.
 - Designed for the removal of efflorescence, mineral and salt deposits.
 - Cleans up to 200 sq. ft./gallon.
 - 1,000 lbs. HAZMAT weight restriction applies with this product.



- SUREBOND STAIN & RUST BUSTER**
RS-CLN065 1 quart; 12/case; 36 cases/skid (432 ea)
- Concentrated, environmentally friendly spot cleaner.
 - Cleans stains such as moss, mildew, leaf, rust and non-greasy food stains.
 - S.R.B. is concentrated; requires dilution prior to use.



- SUREBOND SURE STRIP**
RS-CLN031 1 gallon; 4/case; 36 cases/skid (144 ea)
RS-CLN032 5 gallons; 36/skid (SPECIAL ORDER)
- Strips away a variety of sealers and coatings.
 - Fast-acting, works in minutes.
 - Ready to use, no dilution needed.
 - Coverage is about 250 Sq. Ft./gallon.

Adhesive Products



- SUREBOND SB-10 ADHESIVE**
RS-ADH009-1 10 oz; 12/case; 140 cases/skid (1680 ea)
RS-ADH015-1 28 oz; 12/case; 60 cases/skid (720 ea)
- Fast set-up, quick curing.
 - Can be applied to wet, damp & frozen block.
 - Temperatures ranging from 0 - 100°F.
 - 900 psi.



- SUREBOND SB-15 ADHESIVE**
* SPECIAL ORDER - FULL CASES ONLY *
RS-ADH050 10 oz tube; 12/case; 140 cases/skid
RS-ADH051 28 oz tube; 12/case; 60 cases/skid
- Rapid set, 70% faster set time.
 - Superior durability including heavy vehicular traffic.
 - Temperatures ranging from 10 - 100°F.
 - 1200 psi.



- ALLIANCE XP GATOR BLOCK ADHESIVE**
RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea)
RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea)
- Bonds permanently in 24 hours.
 - Material may be repositioned for up to 30 minutes.
 - Works in temperatures above 32°F.
 - 850 psi in 24 hrs (1000 psi in 7 days).



- TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE**
RS-ADH048 24 oz; 12/case; 84 cases/skid (1008 ea)
- Super- strength foam adhesive.
 - Most items are bonded in just 8 minutes.
 - Works best in temperatures between 0- 120°F.
 - Yields up to 600 ln.ft. with a 3/8" bead.



- TECHNISEAL STRUCTURE BOND™ GUN II**
RS-TOOL378 1 dispenser gun; 12/case
- Perfect for hard-to-reach applications.
 - Limits excessive spillage or dripping.
 - Reusable: Easy clean-up using Gun Cleaner.



- TECHNISEAL STRUCTURE BOND™ GUN CLEANER**
RS-CLN093 24 oz/canister; 12 canisters/case
- Rapidly dissolves any uncured Structure Bond adhesive residue.



- TECHNISEAL STICKY STONE**
RS-ADH055 20.3 oz sausage; 15 sausages/case; 66 cases/skid
- Professional-grade vertical hardscape adhesive.
 - Perfect for outdoor kitchens, fire pits & columns, etc.
 - Holds up to 15 lbs.
 - Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 lnft.
 - Recommended to place 1/2" bead every 3".
 - Applies mess-free and easily with gun applicator.



- STICKY STONE GUN**
RS-TOOL557 1 dispenser gun kit; 10 kits/case
- Heavy-duty dispenser gun specially designed for Stickstone.
 - Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Sealing Products



BACK TO BLACK SEALER

RS-SEAL238 1 quart; 3 quarts/case

- Quickly revives and enhances faded, dark limestone.
- Provides stain & water-resistant surface.
- 1 Liter covers up to 400 sqft with one coat depending on surface porosity.
- LIMITED STOCK AVAILABLE



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

RS-SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases)

RS-SEAL152 5 gallons; 36 ea/skid (22 ea.)

RS-SEAL176 55 gallons; 4 drums/skid | SPECIAL ORDER (1-55 Gal Drum - HAZMAT Limit per TL)

- Seals & enhances surface while hardening jointing sand.
- Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx. coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND 4000 INVISIBLE PENETRATING

RS-SEAL 033 1 gallon | RS-SEAL 034 5 gallon

- Surface Penetrating
- Long Lasting & Durable
- Water repellant and salt blocker
- Non-Hazardous and VOC/EPA Compliant



SUREBOND 1300 JOINT SAND STABILIZING SEALER

RS-SEAL037-2 1 gallon; 4/case; 36 cases/skid (144 ea)

RS-SEAL036 5 gallon; 36 ea./skid

RS-SEAL038 55 gallons; 4 drums/skid (SPECIAL ORDER)

- Stabilizes joints, reduces sand washout, weeds & insects.
- Locks in with a clean, natural look & matte finish.
- Formulated with antifungal to protect film from mold, moss & algae.
- Approximate coverage 80 - 120 sq.ft.



TECHNISEAL® WL4 PROSERIES WET LOOK WATER REPELLANT

RS-SEAL001 1 gallon; 4/case; 45 cases/skid; (22 cases/truckload - HAZMAT)

RS-SEAL073 5 gallons; 48 ea/skid;

- Solvent-based sealer to enhance pavers with wet-look, high-gloss finish.
- Reduces oil & dirt penetration, makes cleaning easier.
- Approximate coverage is 150 sq.ft./gallon (750 sq.ft./5 gallons).
- 1,000 lbs HAZMAT weight restrictions applies with this product.

Sand Products continued



SEK POLYSWEEP SAND

RS-SAND045 - Tan | RS-SAND046 - Grey | RS-SAND184 - Black | RS-SAND147 - Platinum | RS-SAND232 - Pearl
50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Haze Free Guaranteed - Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



SEK POLYSWEEP SAND X-TREME WIDE JOINT

RS-SAND111 - Tan | RS-SAND117 - Grey;
RS-SAND185 - Black | RS-SAND149 - Platinum
50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Formulated for joints 1/8" up to 4".
- Haze Free Guaranteed - Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



TECHNISEAL SMARTSAND

RS-SAND168 - Prairie Grey | RS-SAND169 - Prairie Tan
50 lb/bag • 56 bags/skid (2860 lbs/skid)

Approx. 100-150sq.ft./gallon coverage

- Haze -free, fast-setting polymeric sand.
- Recommended for joints from 1/16" up to 1".
- Minimum Joint Depth is 1.5".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



TECHNISEAL HP NEXTGEL

RS-SAND130 - Prairie Grey | RS-SAND131 - Prairie Tan
50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Dust & haze-free, fast-setting polymeric sand.
- Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



ALLIANCE GATOR SUPER SAND

RS-SAND078 - Beige | RS-SAND080 - Slate Grey
50lb bag / 56 bags per skid

- Advanced haze-free polymeric sand.
- Formulated for pavers, slabs & wet cast pavers up to 1".
- Rain safe 1 hour after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



ALLIANCE SUPER SAND G2

RS-SAND156 - Beige | RS-SAND157 - Slate Grey
50 lb/bag • 56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional and up to 2" for overlay applications.
- Rapid Set Technology - Rain safe 16 minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



ALLIANCE MAXX G2

RS-SAND158 - Beige | RS-SAND159 - Slate Grey |
RS-SAND160 - Black Diamond | RS-SAND161 - Ivory
Packaging: • 50 lb/bag • 56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional applications & up to 2" for overlay applications.
- Rapid Set Technology - Rain safe 16minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".

Sand Products



SEK JOINTING SAND

RS-SAND001-1 - Tan | RS-SAND140 - Grey |

RS-SAND186 - Black | RS-SAND148 - Platinum

50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Angular jointing sand, washed, screened & kiln-dried.
- Coverage: 50=75 Sq. Ft./bag with standard 1/4" joints.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Sand Products continued



ALLIANCE EUROSTONE

RS-SAND095 – Slate Grey

- Polymeric sand designed for drainage and non-drainage base systems.
- Formulated for joints up to 1.5".
- Works above 32°F.
- Coverage 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



ALLIANCE GATOR DUST

RS-SAND072 – Beige | RS-SAND073 – Grey

50 lb/bag • 56 bags/skid

- Polymeric stone dust.
- Formulated for joints from 1/2" to 6".
- Ideal with Gator Base application.
- Coverage: 20-39 Sq.Ft./bag with joints 1" to 2".



ALLIANCE GATOR NITRO SAND

RS-SAND196 – Beige | SAND197 – Grey | SAND198 – Black
SAND236 – Silver (LSA)

40 lb bucket • 48 buckets/skid

- Ready to use permeable jointing material.
- Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile.
- Coverage: 10-84 Sq.Ft./bucket depending on joint width.

Permeable Chip Products



ALLIANCE GATOR AQUA ROCK

RS-AGG032 – 50lb./bag • 56 bags/skid

RS-AGG033 2200 lb./Super Sack

- Meets ASTM No. 9 requirement for permeable joint units.
- High-strength granite ideal for bedding course & jointing material.
- Coverage: 20-25 Sq.Ft./bag | 880-1100 Sq.Ft./ Super Sack.



SEK PERM CHIPS

50lb./bag • 56 bags/skid


RS-AGG035 – Eclipse Black | RS-AGG040 – Stormy Grey
RS-AGG037 – Saturn Tan (SPECIAL ORDER/FULL SKID ONLY)

2500 lb Super Sack:

RS-AGG036 – Eclipse Black | RS-AGG039 – Saturn Tan
RS-AGG041 – Stormy Grey

- High-strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler
- Ideal for permeable paving stone installations, both as a bedding course and as a joint filler
- Coverage: 30-35Sq.Ft./bag | 1500-1750 Sq.Ft./Super Sack

Geotextile & Fabric Products




STRATAGRID – SGU60

RS-FAB101

- Geogrid reinforcement for soil and aggregates
- Engineered to be mechanically & chemically durable in harsh construction and aggressive soil environments
- Roll Dimensions: 6.25' wide x 288' length (200 Square Yards)
- 85 lbs/roll

Geotextiles and Fabric Products



UNILOCK DRIVEGRID™ SYSTEM

RS-FAB075

- 120' x 12.5' Roll – 1,500 Sq. Ft.
- 56 lbs per roll.
- Sold in full rolls only.



GEOTEXTILE FABRIC

RS-FAB001

- 6 oz. Non-woven multipurpose geotextile fabric.
- Sold in full roll quantities only.
- Roll Dimensions: 15' wide x 300' length (4500 Sq.Ft.)
- 225 lbs/roll.



ALLIANCE GATOR GRID 30-30

RS-FAB070 – 4'x50'; 15 rolls/case; 4 cases (60 rolls/skid)

(FULL CASES ONLY)

RS-FAB072 – 6'x150'; 30 rolls/skid

- Biaxial geogrid, with high molecular weight weight and high-tenacity polyoyster yarns
- High-tenacity polyester yarns woven in tension and finished with PVC coating



GATOR FABRIC GF4.4

RS-FAB044 – 4'x100'; 6 rolls/case; 4 cases (24 rolls/skid)

(FULL CASES ONLY)

RS-FAB047 – 6'x300'; 16 rolls/skid

- Needle punched non-woven geotextile made of polypropylene fibers
- Non-biodegradable and resistant to most soil chemicals.

Miscellaneous Items



WALL DRAIN PRO

RS-ACC086 – Black | RS-ACC123 – Grey | RS-ACC122 – Tan
12 units/case; 63 cases/skid (full cases only)

- Simpler, aesthetically pleasing improved water drainage product
- Drain height can be easily modified to use with any block height under 8"



X & T SLAB SPACERS


RS-ACC237 – X Spacers; 2" x 2"; 250 pcs./bag

RS-ACC236 – T Spacers; 2" x 1"; 250pcs./bag

- UniLock recommends using slab spacers when installing Arcana on an open grade surface
- "T" spacers are needed for running bond patterns; "X" spacers for stack bond patters. Please contact your sales manager for more information
- X & T bagged separately



Gator Base System

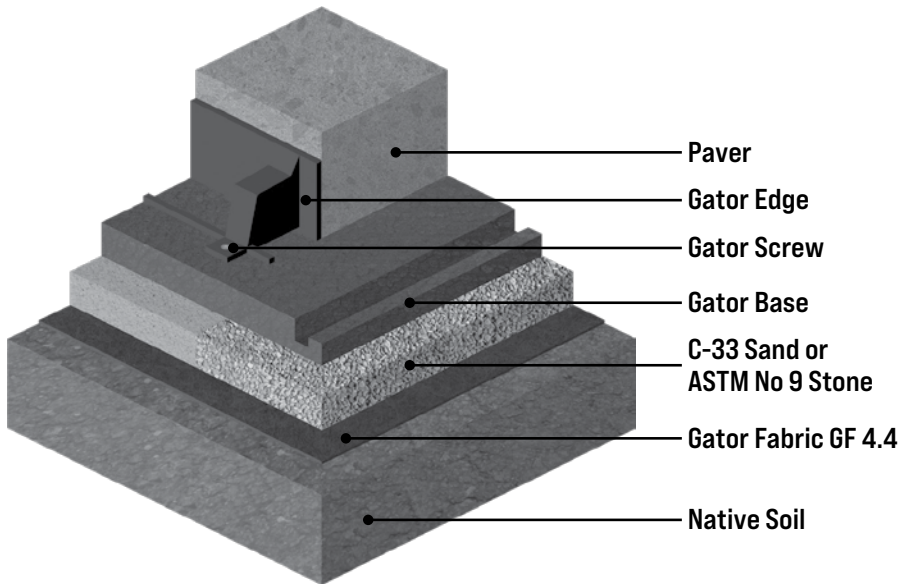

STEP 1 • EXCAVATION FOR THE GATOR BASE INSTALLATION

The total depth required will be determined by adding the thickness of the sand or chip setting bed (3/4" [19 mm]), GATOR BASE (3/4" [19 mm]), and thickness of the paver, slab, stone, or porcelain tile. Excavation depth is approximately 4" for a 2 3/8" [60 mm] concrete paver. Excavate 6" (15 cm) wider than the perimeter of the paved surface or 12" wider (30 cm) when building a seating wall or fire pit.

STEP 2 • LEVELING AND COMPACTING OF THE SOIL

The bottom of the excavated area should be uniform and smooth (+/- 3/8" [10 mm] in 10') and slope in the same direction as the finished paver surface. Compact the soil using a vibrating plate or hand tamper in confined areas.

STEP 3 • ADD GATOR FABRIC GF4.4 AND INSTALL SETTING BED

Cover the bottom and sides of the excavated area with Gator Fabric GF4.4. Spread an even layer of sand (ASTM C33 Concrete Sand) or chip (ASTM No. 9 Stone) in a 3/4" [19 mm] thick layer over the Gator Fabric GF4.4. No compaction is needed for the chip stone. However, the sand-setting bed should be compacted using a hand tamper or vibrating plate. It will help to moisten the sand before compaction. The surface should be smooth, the finished paver surface will mirror the grade set in this step.

STEP 4 • INSTALL THE GATOR BASE


Cover the area with the GATOR BASE panels, 6" (15 cm) wider than the finished paver edge or 12" (30 cm) for a seating wall or fire pit. Lay the GATOR BASE units in an alternating (staggered) pattern - if the Gator Faces line up, the interlocking edges will align perfectly. Gator Base can easily be cut to size using a utility knife.

STEP 5 • INSTALL PAVERS, BLOCKS AND GATOR EDGE

Place the pavers or blocks directly on the GATOR BASE. Adding a 1/2" (13 mm) of bedding sand onto the surface of the GATOR BASE is also an accepted method for non-uniform thickness stone. Install the Gator Edge on the GATOR BASE, firmly against the pavers or blocks. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Edge.

STEP 6 • APPLY GATOR MAXX G2 TO PAVER JOINTS

Gator Tile System

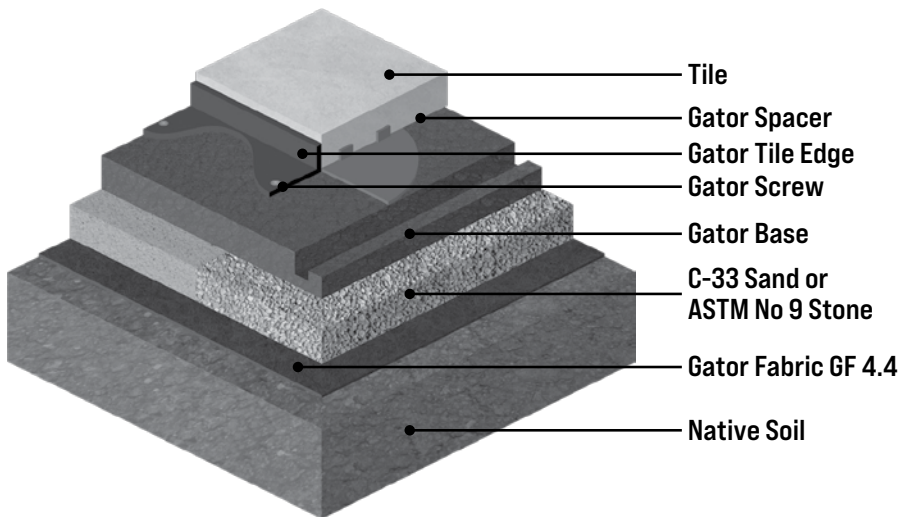

FOLLOW STEPS 1 TO 4 OF GATOR BASE SYSTEM

STEP 5 • INSTALL GATOR SPACER, GATOR XP GLUE AND TILE

The installation of porcelain tile directly on top of the Gator Base using the GATOR SPACER to provide uniform spacing and unparalleled stability. The GATOR SPACER has been designed to provide the right support, load transfer and a monolithic surface binding all units together with the help of the Gator XP Glue on every quadrants of the Gator Spacer.

STEP 6 • INSTALL GATOR TILE EDGE

Install the Gator Tile Edge on the GATOR BASE, firmly against the tiles. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Tile Edge.

STEP 7 • APPLY GATOR NITRO TO TILE JOINTS




Edging Products

SEK SNAPEDGE

RS-EDGE001 - 8' (96") piece; 24 pcs./bundle; 28 bundles (672 pcs./skid)
 RS-EDGE017 - Low Profile; 6' 8" (80") piece; 24 pcs./bundle; 28 bundles (672 pcs./skid)

- One-piece edging system that handles both straight & curved installations.
- Unique and quick snip 'n flex feature.
- Open base design allows root and grass system to grow through.
- Standard Sidewall: 1 7/8" | Low Profile Sidewall: 1 3/8"
- Skid Dimensions: 98"L x 48"W x 50"H - 210 lbs./skid

RS-EDGE001



Low Profile - RS-EDGE017



SPIKES

RS-EDGE014 - 10" Round Spike; About 150 spikes/case; 48 cases/skid

- Premium heavy-duty landscape metal spike.
- SOLD IN FULL CASES ONLY.
- 51 lbs./case; 2,448 lbs./skid



SEK PERMEDGE

RS-EDGE033 - 8' (96") piece; 64 pcs./skid

- Permeable, spikeless edge restraint that includes attached geogrid.
- One-piece edging system that handles both straight and curved installations.
- Approximate Coverage: 25-30 Ln.Ft./bucket



PERMAEDGE PAVER EDGING

RS-EDGE074 - 5 Gallon bucket; 77 lb./bucket

- Quick & easy to use - cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 1 gallon of water to each 5 gallon bucket of PermaEdge.
- Approximate Coverage: 25-30 Ln.Ft./bucket



PERMAEDGE PAVER EDGING

RS-EDGE081 - 50 lb. bag; 56 Bags/Pallet

- Quick & easy to use - cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 2/3 gallon of water per bag.
- Approximate Coverage: 16' - 18' Ln.Ft. on Dense Base, 12' - 16' Lin. Ft on Open Graded Base.



SEK EDGECRETE

RS-EDGE075 - 50lb bag; 56 bags/skid

- Paver restraint in a bag - Just Add Water.
- Fiber-reinforced concrete edge restraint.
- Simple to install - No spikes needed.
- Approximate coverage: - Std. Base - 17 Ln.Ft./bag; Permeable & Open Base- 13 Ln.Ft./bag

Edging Products continued



ALLIANCE GATOR EDGE RIGID

RS-EDGE055 8' piece; 24 pcs/bundle
 28 bundles/pallet (672 pcs/pallet)

- Gator Edge Products are easy to use and quick to install. Offers great lateral support and makes definition easier for alleys, driveways or sidewalks.
- They are made with 100% polypropylene or polyethylene for strength and flexibility.
- Rigid Edging can be transformed to Flex with a simple cut.



ALLIANCE GATOR XTREME EDGE

RS-EDGE076 50 lb bag / 56 bags per skid.

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Approximate Coverage: 20-25 sqft. per bag.

Stainless Steel Fireplace Insert

STAINLESS STEEL FIREPLACE INSERT




36" Unit - RS-FIR033; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

42" Unit - FS-FIR034; (LIMITED AVAILABILITY); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

- Outdoor, Wood-burning Fireplace.
- Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- 254 lbs./Full Kit



	36	42
A	29"	36"
B	11-3/4"	11-3/4"
C	41"	48"
D	21"	24"
E	35"	42"
F	37"	41"
G	21"	22-1/2"




Unilock Pedestal System

TECHNICAL SPECIFICATIONS

Material	Recycled Polypropylene
Height Range	11/16" - 37-3/8" (17mm to 950mm)
Ultimate Compressive Strength ¹	P Series - 20 kN (4,496 lbs)* T Series - 10 kN (2,360 lbs)* M Series - 15 kN (3,372 lbs)*
Slope correction	0% to 8% @ 1% increment
Base Diameter	P Series - 6.81" (173 mm) T Series - 6.96" (177 mm) M Series - 8.26" (210 mm)
Spacer Tab Height	7/8" (11mm)
Spacer Tab Thickness	1/8" (3mm) [gap between pavers]
Biological / Chemical	Unaffected by molds and algae
Resistance	Good resistance to alkali and bitumen


¹Detailed values for individual heights are given in the technical specification

MAX PEDESTAL ASSEMBLY

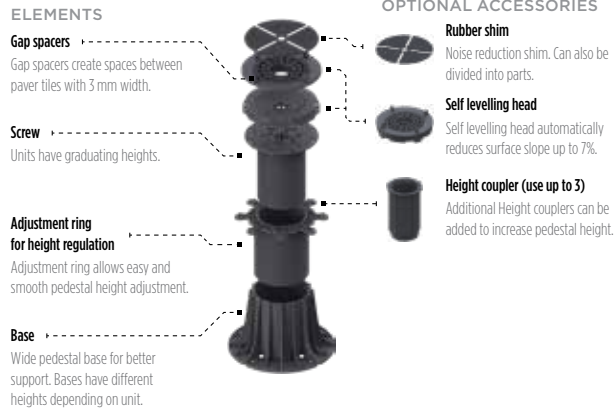

UNILOCK PEDESTAL HEIGHT CHART

T Series are discontinued. Limited quantities available while supplies last. Contact Unilock for more information.

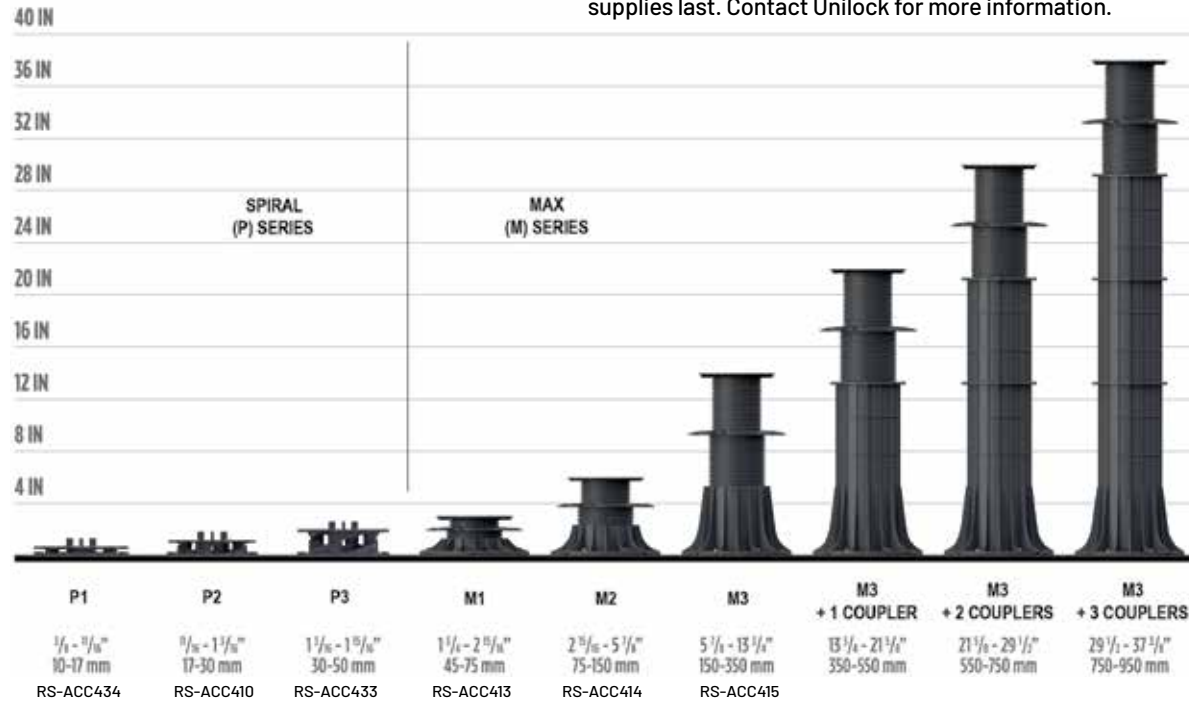

NOTE: These units are created using a combination of of M1, M2 & M3 units. Contact Unilock for more information.

ACCESSORIES

	Moveable Gap Spacer Tabs 1/8" (3MM)	Self-leveling Head 6% MAX	Rubber Shim 1/8" (1.5MM)	Height Coupler 7 7/8" (200MM)	Slope Corrector 5/8" (16MM)	Drill Driver	Regulation Key	Wall Edge Clip 1/32" (0.7MM) SPECIAL ORDER
✓ Indicates compatible with Series™, ordered separately. - Indicates not compatible with Series.		 RS-ACC417	 RS-ACC421	 RS-ACC416	 RS-ACC418	 RS-ACC422	 RS-ACC419	 RS-ACC450
SPIRAL (P) SERIES	Gap Spacers Included	✓	✓	-	-	-	-	✓
MAX (M) SERIES*	Gap Spacers Included	✓	✓	✓	✓	✓	✓	✓

Sealer Best Practices

- The paver surface should be **clean** and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be **free of any visible efflorescence**.
- If pavers have been sealed before, make sure to resealed with compatible product.
- **Surface must be dry** (48 hours without precipitation) and warm to the touch (morning).
- Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between **50 degrees to 80 degrees** with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the **same application method from start to finish**.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8" below** the surface on the non-beveled or tumbled paver surface.
- **Always test the product** on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- **Read application information as each sealer can be applied differently.**
- **Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays.** Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- **Send your most experienced worker to do sealing projects.**

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure pavers are **clean of all construction dust**. Residual construction dust will haze pavers!
- **Compact pavers** into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. **(Read Directions)**
- **Don't rush polysand installation.**
- Paver area must be completely dry.
- Lay bags of polysand over paver area. **Stage bags** in areas of coverage. Example: one bag for 60 square feet.
- **Do not over sweep sand.** Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to **remove any excess sand from the paver surface**.
- Use a **leaf blower** remove any sand or binder residue.
- **Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!**
- Always start watering at the **bottom of the slope**.
- Always start watering in **controlled areas** per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, **clean surface by removing excess water** with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts – Always be aware of the weather when installing poly sand. **(Temperature and setting time ratings differ between products.)**
- Refer to all manufacturers websites for installation videos.

Terms and Conditions of Sale

STANDARD TERMS

1. All orders are accepted subject to prevailing state or other taxes, and subject to applicable skid charges and the cost of freight applying at the time of shipment. Confirm prices at time of order as they are subject to change.
2. The acceptance by the seller of an order shall constitute a binding contract of purchase and sale, in accordance with the terms set out in this agreement.
3. These terms and conditions, together with the purchase order, form the complete contract, and there are no representations, warranties, or conditions expressed or implied, affecting this contract, other than as contained herein.
4. All sales are made in accordance with the seller's samples, which the purchaser has seen and approved. No guarantee of exact color shades is made.
5. Use of any delivered materials by or on behalf of the purchaser shall be deemed to constitute acceptance of the materials by the purchaser.
6. Excessive defective material picked up or delivered to the purchaser will be replaced free of charge if a claim is made within five days. Free replacement will be the extent of the seller's warranty. Any such claim will not constitute a reason for delaying payment. All other claims must be submitted within 30 days of purchase.
7. Unsuitable or unsatisfactory materials must be available for inspection by the seller to entitle the purchaser to any adjustment or credit. Skid returns will be posted to account next business day.
8. No materials may be returned for credit except with the written consent of the seller, whether such materials were ordered in excess of the purchaser's requirement, by mistake, or otherwise. Where the seller agrees to accept the return of goods, these goods are subject to freight charges and a restocking charge of 20% of their value. All goods must be returned in their original packaging. ACCESSORIES, SECTIONS AND OPENED MATERIAL ARE NONRETURNABLE FOR ANY REASON.
9. Seller does not accept responsibility for delays in deliveries due to fire, flood, strikes, or any other condition or contingencies beyond its control.
10. The purchaser is responsible for installation of the materials on the job site, and the seller has no responsibility in this regard.
11. All approved credit accounts are payable within thirty days of invoice. After 30 days, interest will be charged at 1.5%* per month (A.P.R.19.65%*), Calculated monthly on the balance owing at the beginning of the period. If purchaser defaults in the payment of any portion of amounts due on this account, the entire remaining unpaid balance shall, at the option of the seller, immediately become due and payable with collection costs incurred.
12. Skid deposits are non-refundable with 2 or more broken top boards or one main stringer board. If you have skids loaded onto your vehicle or receive a delivery with skids in this condition, you must have the Unilock representative (loader or truck driver) note the quantity on the shipping document paperwork. The responsibility of the return of empty skids for credit rests with the purchaser. There will be a net usage fee for all skids accepted for return. Skids picked up by Unilock in conjunction with a delivery by a Unilock truck will not be credited until returned to Unilock and sorted and verified by Unilock. Normal delivery charges will apply to requested skid pick-ups which do not coincide with a Unilock delivery to the site.
13. A sectioning charge of \$30.00 is applied to all items where bundles are split.

GENERAL TERMS

1. All prices are F.O.B. Aurora, IL, Marengo, IL or Elkhorn, WI. Please contact Unilock for all freight rates.
2. All C.O.D. orders must be paid by certified check, cash, or prior approved check. Cashier's checks are encouraged over cash due to COVID-19.
3. Contact Unilock for shipping schedules, rates, and conditions, and any fuel surcharges.
4. Configurations may vary from time to time due to mold design changes.
5. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80.00 per hour or fraction thereof. Similarly, delays incurred on partial delivery (1-7 bundles) in excess of one half hour will be billed to the purchaser at the same rate.
6. There is a mandatory \$26.00 skid deposit charge for the Standard Four Way Shipping Skids (SKID3842HERM, SKID2640HD & SKID), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
7. There is a mandatory \$30 skid deposit charge for the following Wetcast Product Skids (SKIDPREM 1,2,3,4 & 5), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
8. There is a mandatory \$34 skid deposit charge for all Canadian/Elegance Skids & Four Way 48" Solid Top Skids (SKIDLTD & SKIDSOLID48), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.


CUSTOM ORDERS

1. Custom Orders refer to nonstandard-inventoried items. Deposits of up to 100% of the order value (minimum of 20%) will be required. Minimum quantities apply on custom orders. Custom orders may be subject to a [500]sq.ft. over-run charge. Purchase orders as well as a signed special order release form will be required for custom material. Custom Orders will not be accepted for return.
2. All custom produced product must be shipped within 30 days of production. After 30 days all custom produced material will be subject to a storage fee of \$5.00 per pallet per month. Please contact your Territory Manager for more information.

CONFIRM ALL PRICES AS THEY ARE SUBJECT TO CHANGE


Laying Patterns

ARTLINE™




Artline A - 100% Random

BEACON HILL™ FLAGSTONE & BRISTOL VALLEY®




Beacon Hill Flagstone/Bristol Valley A - 40% Lg Rectangle, 40% Square, 20% Sm Rectangle




Beacon Hill Flagstone/Bristol Valley B - 40% Lg Rectangle, 40% Square, 20% Sm Rectangle

BEACON HILL FLAGSTONE, BRISTOL VALLEY & UMBRIANO® XL




Beacon Hill Flagstone/Bristol Valley XL C - 67% Random Bundle, 33% XL

ECO-PRIORA™




Eco-Priora E - 100% Rectangle


BRUSSELS BLOCK®




Brussels P - 67% Standard, 33% Half




Brussels O - 67% Standard, 33% Half




Brussels X - 57% XL, 29% Standard, 14% Half



Brussels Y - 57% XL, 29% Standard, 14% Half




Brussels Z - 67% XL, 20% Standard, 13% Half




Brussels AF - 40% XL, 40% Standard, 20% Half

COPTHORNE®




Cophorne A - 100% Standard




Cophorne B - 100% Standard

COURTSTONE®




Courtstone A - 16% Square, 18% Sm Rectangle, 19% Rectangle, 22% Lg Rectangle, 25% XL Rect.

HOLLANDSTONE™ & HOLLAND PREMIER™




Hollandstone D - 100% 4"x8"




Hollandstone C - 100% 4"x8"


NATURAL STONE



Natural Stone C - 67% 24" x 24", 33% 12" x 24"




Natural Stone D - 57% 12" x 24", 43% 18" x 24"




Natural Stone F - 34% 24" x 36", 24% 24" x 24", 18% 18" x 24", 24% 12" x 24"

TRIBECA COBBLE™



Tribeca Cobble - 100% Random Bundle


WESTPORT™




Westport Random - 34% Large Rectangle, 40% Square, 26% Rectangle

Laying Patterns

ECO-PROMENADE®




EcoPromenade 3x12 RB A - Running Bond




EcoPromenade 3x12 DHB B - Double Herringbone


NORDIC COBBLE™



NordicCobble A - 11% Nordic Cobble
89% 12 x 24" Paver




NordicCobble Fan




NordicCobble_Circle

SORENO™




Soreno 16x32 RB A - Running Bond

UMBRIANO® RANDOM




Umbriano Random A - 40% Large Rect., 40% Square, 20% Small Rect.




Umbriano Random B - 40% Large Rect., 40% Square, 20% Small Rect.

TREO®




Treo R - 45% Large Rectangle, 35% Square, 20% Small Rectangle




Treo S - 45% Large Rectangle, 35% Square, 20% Small Rectangle

UMBRIANO®, BEACON HILL FLAGSTONE & BRISTOL VALLEY XL




Beacon Hill Flagstone/Bristol Valley XL G - 50% Random Bundle, 50% XL


RICHLIFF®




Richcliff A - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff B - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff C - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"



Richcliff D - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff E - 44.6% Random Bundle, 55.4% Large Rectangle




Richcliff F - 44.6% Random Bundle, 55.4% Large Rectangle


ARCANA™



Arcana A - 44% 24" x 24", 33% 18" x 24", 23% 12" x 24"




Arcana C - 36% 24" x 24", 27% 18" x 24", 37% 12" x 24"




Arcana F - 67% 24" x 24", 33% 12" x 24"

SERIES™ 4x8



Series 4x8 HB G - Herringbone



Series 4x8 RB F - Running Bond

TOWN HALL®



Town Hall 4x10 DHB_B - Double Herringbone

2024 Freight Rates

Rates are based on a 0-50 mile radius from Aurora, IL, Marengo, IL & Elkhorn, WI facilities. Please contact the shipping department for all truckload rates and any questions concerning delivery. Approximately 14 bundles or 43,000 pounds per truckload. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80 per hour or a fraction thereof. Partial load deliveries in excess of one-half hour will be billed to the purchaser at the same rate. **Fuel surcharge will be added to each order per guide below:**

Bundles	Boom	Princeton	Cost of Fuel	Flat Surcharge	At Least	Less Than	Fuel Surcharge
1-7	\$420.00	\$495.00	\$2.30 to \$2.79	\$27.00	\$2.30	\$2.79	5%
8-14	\$570.00	\$675.00	\$2.80 to \$3.29	\$42.00	\$2.80	\$3.29	10%
			\$3.30 to \$3.79	\$51.00	\$3.30	\$3.79	15%
			\$3.80 to \$4.29	\$64.00	\$3.80	\$4.29	20%
			\$4.30 to \$4.79	\$78.00	\$4.30	\$4.79	25%
			\$4.80 to \$5.29	\$93.00	\$4.80	\$5.29	30%
			\$5.30 to \$5.79	\$106.00	\$5.30	\$5.79	35%

Fuel Surcharge for 0-50 miles only

Fuel Surcharge for deliveries over 50 miles

NOTE: Rates are based on current economic conditions and are subject to fuel surcharges, which will be based on the U.S. National Average Midwest rate of diesel fuel, calculated weekly. When the average price of fuel rises (or drops), the surcharge will take effect the following Monday. These rates can be located at www.eia.gov/petroleum/gasdiesel/.

IMPORTANT NOTES

SPECIAL ORDER PRODUCTS

Products listed as "Special Order" are not currently inventoried and may require additional lead times for manufacturing (or transfer from other Unilock locations). Prior to bidding or quoting projects, confirm Special Order unit pricing and minimum quantity requirements. A signed "Special Order Release Form" must be submitted prior to manufacturing and all material must begin shipping within 30 days of manufacturing date. Any Special Order products remaining at Unilock after 30 days will be subjected to a storage fee of \$5.00 per pallet per month. (Maximum storage is 3 months.) All quantities listed on the Special Order Release Form must ship and be paid in full. Please contact your Territory Manager for more information.

SPECIAL SAND GUIDANCE

EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Arcana Courtstone® Copthorne® Il Campo® Richcliff® Series™ Town Hall® Tribeca Cobble Umbriano™

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Please refer to each individual manufacturer for full instructions prior to install.

NATURAL STONE INSTALLATION GUIDELINES

A slurry coat, sometimes called a bond or milk sealer coat, is brushed on to the back of each natural stone unit prior to installation in order to limit moisture penetration, prevent staining and aid adhesion.

OPTIMAL COLOR BLENDING INSTALLATION

Blending colors from multiple (3+) bundles is ideal for the optimal color installation. **DO NOT LAY PALLET TO PALLET!**

IMPORTANT NOTES continued

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2024 Hengestone Holdings, Inc.



QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of

poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color.

Note: Unilock Natural Stone variations are outside the control of Unilock.

Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

CHICAGO PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver	4	S	✓				
Anchorlock™	5	S	✓		✓		
Arcana™	6	SM	✓				
Artline™	7	M	✓	✓			
Beacon Hill™ Flagstone	10	F	✓				
Beacon Hill™ Smooth	12	SM	✓				
Bristol Valley®	14	F	✓				
Brussels Block®	16	W	✓	✓			✓
Copthorne®	17	T	✓	✓			✓
Courtstone®	18	C	✓	✓			✓
Eco-Line®	19	M	✓	✓	✓	✓	✓
Eco-Optiloc™	20	M	✓	✓	✓	✓	
Eco-Priora™	21	M	✓	✓	✓	✓	
Eco-Promenade®	22	M	✓	✓	✓	✓	
Promenade™ EcoTerra	23	SM	✓	✓			
Granito™	24	S	✓	✓	✓		
Hex™	25	S	✓	✓		✓	
Hollandstone™	26	S	✓	✓	✓		✓
Holland Premier™	28	S	✓	✓			✓
Mattoni™	29	SM	✓	✓			✓
Natural Stone	30	SM	✓				
Nordic Cobble™	34	WS	✓	✓	✓	✓	✓
Optiloc®	35	M	✓	✓	✓		
Porcelain	36	SM	✓				
Promenade®	39	M	✓	✓	✓		✓
Richcliff®	41	T	✓	✓			✓
Series™	42	WS	✓	✓	✓		✓
Skyline™	44	S	✓				
Soreno™	45	SM	✓				
Town Hall®	46	T	✓	✓	✓	✓	✓
Treo® Smooth	47	SM	✓	✓	✓	✓	✓
Tribeca Cobble	48	WS	✓	✓	✓	✓	✓
Turfstone™	49	S	✓	✓	✓	✓	
Umbriano®	50	SZ	✓	✓	✓	✓	✓
Westport™	52	T	✓	✓			✓

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional Stone®	54	W	✓		✓	✓	✓
DuraHold®	55	SM		✓	✓	✓	
Estate Wall™	56	SP/W	✓	✓	✓	✓	✓
Lineo™ Dimensional Stone	57	SM	✓		✓	✓	✓
Mackinaw™	58	SP	✓	✓		✓	
Olde Quarry™	59	W	✓	✓	✓	✓	✓
Olde Quarry™ Smooth	60	SM	✓	✓	✓	✓	✓
Pisa™	61	SP	✓	✓	✓	✓	✓
Pisa™ Smooth XL	62	SM	✓	✓	✓	✓	✓
Rivercrest®	63	S	✓	✓	✓	✓	✓
SienaEdge™	64	SM	✓	✓	✓	✓	
SienaStone®	65	SP	✓	✓	✓		
U-Cara®	67	M	✓	✓	✓	✓	✓

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**



SCAN THE QR CODE FOR MORE INFORMATION OR TO DOWNLOAD A FREE 30-DAY TRIAL OF UVISION 3D LANDSCAPE CREATOR.





TRANSFORMING HARDSCAPES

UNILOCK.COM | 1-800-UNILOCK

Let's **BUILD YOUR BUSINESS TOGETHER.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

BOSTON
(508) 278-4536

CHICAGO
(630) 892-9191

MILWAUKEE
(262) 742-3890

KANSAS
(913) 417-7985

MICHIGAN
(248) 437-7037

NEW YORK
(845) 278-6700

MID-ATLANTIC
(202) 798-2060

ONTARIO
(416) 646-9000

CINCINNATI/KY/TN
(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**
(330) 927-4000

